



Nothing But LED's 16-inch flush mount light typically refers to a ceiling light fixture with a diameter of 16 inches that is designed to be mounted flush against the ceiling. Our flush-mounted light comes with 3-wattage & 5 CCT adjustable options Our Flush mount light has a variety of styles, designs, and finishes to choose from, allowing you to select one that matches your decor and lighting needs.

Product Features

- Up to 75 Lumens per watt
- Wattage Adjustable 16W / 22W / 30W
- 5 CCT Adjustable 2700K / 3K / 3500K / 4K / 5K
- Available in 16" with double ring
- Frosted Polycarbonate Lens
- Triac Dimmable

- Brush Nickel (Stainless Steel)
- Damp Location Suitable
- Input Voltage 120Vac
- ETL & ES Listed
- 5 Year warranty




SKU #	Model #	Wattage Adjustable	Lumens	CCT Adjustable	Size	Housing	Input Voltage	Certifications
1560739	FXF23004	16W/22W/30W	2250Lm	2700K/3K/3500K/ 4K/5K	16"	White	120Vac	ETL & ES

Specifications


Parameter	Description	Value		
	Model #	FXF23004		
	Wattage Adjustable	16W / 22W / 30W		
	Lumens	2250Lm		
	Lumen Efficacy	Up to 75LM/W		
General Performance	Color Temperature	2700К / 3000К / 3500К / 4000К / 5000К		
Performance	CRI (Ra)	>80		
	Beam Angle	110° Degree		
	Diffuser Type	Frosted Polycarbonate Lens		
	Input Voltage	120Vac		
	Frequency	50/60Hz		
	Dimming	Triac Dimmable		
Electrical	Power Factor	>0.9		
	Flicker Percent	30%		
	Operating Temperature	-20°C-40°C		
	Operating Humidity	<75%RH		
	Storage Temperature	20°C-30°C		
	Storage Humidity	<60%RH		
Physical	LED Brand	Lumileds		
	LED Type	2835		
	LED QTY	84 PCS		
	Housing Material	Metal		
	Housing Color	Brushed Nickel		
	IP Rated	DAMP		
Qualification	Warranty	5 Year Limited		



Correlated Color Temperature (CCT)

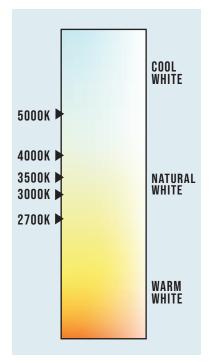


Dimensions

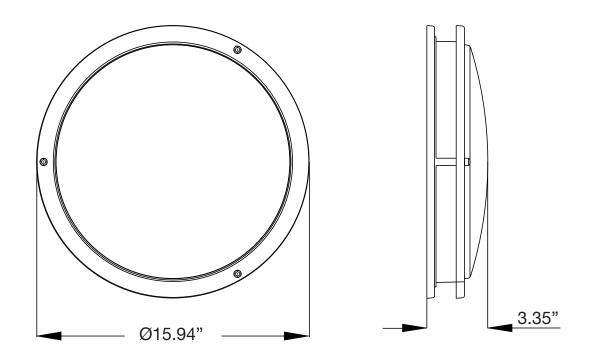




Product Appereance

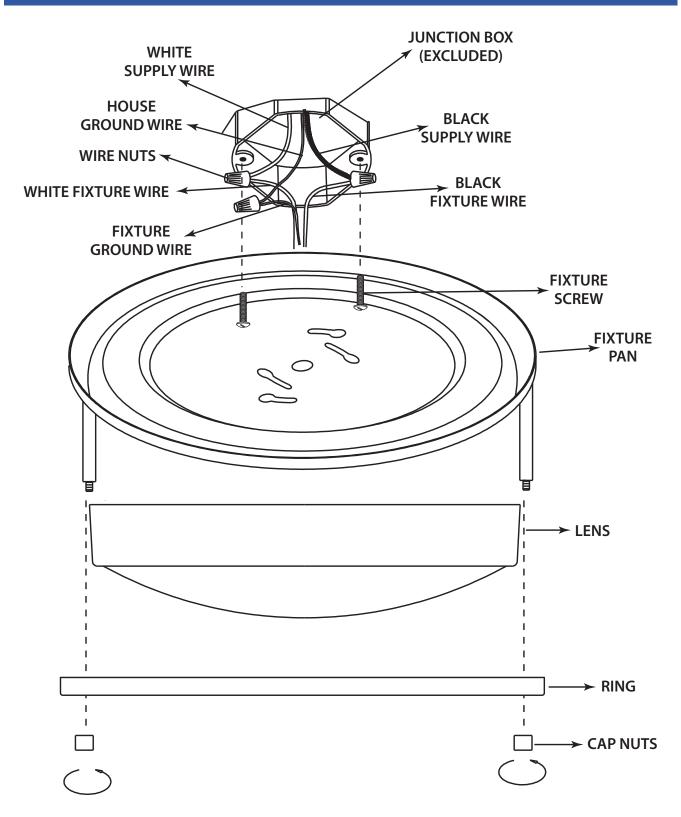



Photometric Data

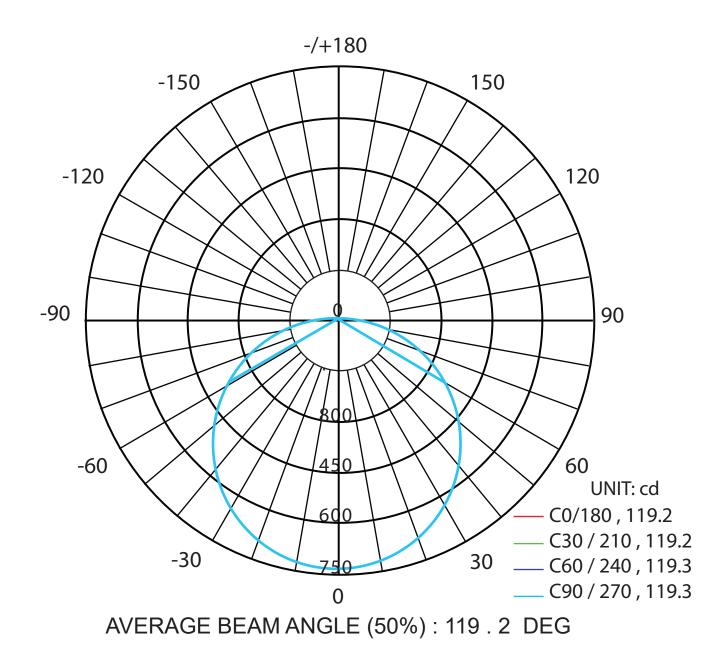




Installation


PLEASE READ AND UNDERSTAND THIS ENTIRE MANUAL BEFORE ATTEMPTING TO ASSEMBLE, OPERATE OR INSTALL THE PRODUCT. WARNING: Avoid fire or electric shock. Follow installation instructions carefully. If unsure about electrical installation, consult a qualified electrician. Wear rubber-soled shoes and work on a sturdy wooden ladder. Ground fixture to avoid potential electric shock. Handle metal parts carefully to prevent cuts. To avoid a hazard to children, account for all parts and destroy all packing materials. This product is suitable for indoor damp applications.

CAUTION: Turn off power at fuse or circuit breaker box before installation and maintenance. Fixture must be installed according to National Electric Code and local building codes. If you are unsure about wiring, consult a qualified electrician. THIS FIXTURE BODY IS ONE PIECE, DO NOT DISASSEMBLE OR MAKE ALTERATIONS,

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful inference and (2) this device must accept any inference received, including that may cause undesired operation.



DIMMABLE*



WARNING! BEFORE PROCEEDING, PLEASE ENSURE POWER HAS BEEN SWITCHED OFF.

Pull the supply wires (4, 5, 6) out of the junction box (1).

Thread the fixture screws (8) into the appropriate threaded holes of the junction box (1).

Connect the fixture black wire (10) to the black supply wire (5) white fixture wire (9) to the white supply wire (4) and fixture ground wire (11) to the supply ground wire (6) using wire nuts (7). Wrap all wire connections with electrical tape to ensure secure connection.

Carefully tuck all wires back into the junction box. Place the fixture pan (2) over the junction box and feed fixture screws (8) through keyhole slots. Rotate the fixture pan(2) clockwise until screws (8) lock into the narrow end of the keyhole slots and tighten screws firmly.

Secure the lens (3) and ring (12) to fixture pan (2) using three cap nuts (13). Installation complete, restore power at the circuit breaker.

*. Two switches are for adjusting CCT and Power.


JUNCTION BOX (EXCLUDED) FIXTURE PAN LENS WHITE SUPPLY WIRE BLACK SUPPLY WIRE HOUSE GROUND WIRE WIRE NUTS FIXTURE SCREW WHITE FIXTURE WIRE BLACK FIXTURE WIRE FIXTURE GROUND WIRE RING CAP NUTS



Box Dimensions

Вох Туре	ype Box Dimensions (Inches)		Net Weight	Gross Weight	
Inner Box	17 x 3 x 17	1 Pc/Box	3.08 LBS	3.4 LBS	
Outer Box	17.71 x 16.93 x 16.93	6 Pcs/Box	18.52 LBS	23.5 LBS	

Application Images

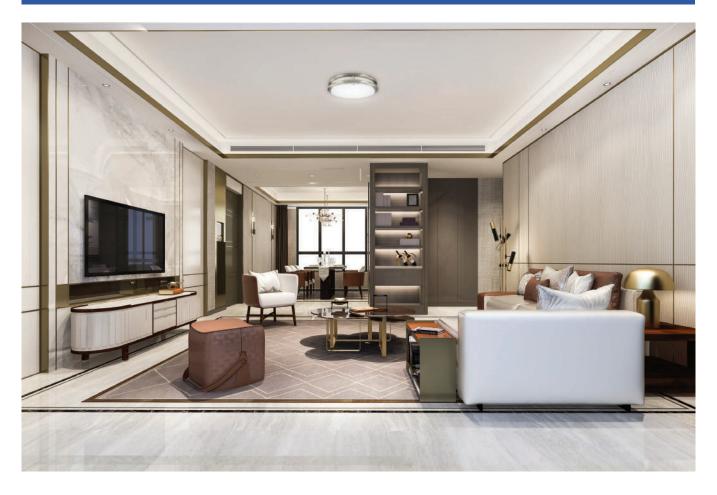

Warranty

5 Year Warranty