



The LED Corncob from Nothing But LED's LED Technology is the newest, most innovative and feature-rich product of 2024. Nothing But LED's Corncob lights are wattage-adjustable designed for fully enclosed fixtures. Our LED Corncob bulbs are meant to save energy in fixtures that formerly utilized metal halide or high-pressure sodium lights while maintaining a high Lumen output. These high-output LED's are ideal for post top lights, shoebox fixtures and other high intensity lighting.

Product Features

- Up to 142 lumens per watt
- Wattage & CCT Adjustable
- Enclosure provides a water-tight seal making it suitable for outdoor application
- Integral LED driver (non-isolated), eliminates the need for an external driver or ballast
- High Quality and Efficacy Lumiled 2835 chips
- This product is IP64 rated, therefore, it is waterproof and dust proof rating

- Universal operation at 100-277Vac 50-60Hz
- High-reliability internal driver
- Direct replacement for Metal Halide
- Damp Location
- PC+Aluminum Housing
- 5 Year warranty
- UL & DLC Listed

B BUT LEDS

SKU #	Model #	Base	Wattage Adjustable	Lumens	CCT Adjustable	IP	Housing	Input Voltage	Certifications
1560814	AST-CLW08C-36WBCN A1-EXSPCA30/40/50K	E26	18W/27W/ 36W	Max 5112LM	3K/4K/5K	IP64	White	100V-277V	UL & DLC
1560815	AST-CLW08C-63WBCN A1-EXSPCA30/40/50K	EX39	36W/54W/ 63W	Max 8946LM	3K/4K/5K	IP64	White	100V-277V	UL & DLC
1560768	AST-CLW08C-120WBCN A1-EXSPCA30/40/50K	EX39	80W/100W/ 120W	Max 17040Lm	3K/4K/5K	IP64	White	100V-277V	UL
1560816	AST-CLW08C-200WBCN A1-EXSPCA30/40/50K	EX39	80W/150W/ 200W	Max 28400Lm	3K/4K/5K	Damp Location	White	100V-277V	UL & DLC





SKU # 1560814		Specifications			
Parameter	Description	Value			
	Model #.	AST-CLW08C-36WBCNA1-EXSPCA30/40/50K			
General Performance	Wattage Adjustable	18W / 27W / 36W			
	Color Temperature	3000К / 4000К / 5000К			
	Lumens Adjustable	Max 5112Lm			
	Lumen Efficacy	Up to 142 LM/W			
	CRI (Ra)	>80			
	Diffuser Type	Clear			
	Beam Angle	193° Degree			
	Input Voltage	100-277V			
	Frequency	50/60Hz			
Electrical	Dimming	0-10V Dimmable			
	PF	≥0.9			
	THD	≤20%			
	Flicker Percent	<50%			
	Equivalent	80W CFL, 150W MHL/HPS/HID			
	Driver Surge Protection	L-N: 4kV			
	Operating Temperature	-40°C TO 50°C			
	Storage Temperature	-40°C TO 80°C			
	Operating Humidity	20% - 70% RH			
Physical	Storage Humidity	10% - 75% RH			
	LED Brand	Lumileds			
	LED Type	SMD2835			
	LEDs QTY	144 PCS			
	Housing	PC + Aluminum			
	Housing Color	White			
Qualification	IP Rating	IP64			
	Warranty	5 Year			



SKU # 1560815

Specifications

	-			
Parameter	Description	Value		
	Model #.	AST-CLW08C-63WBCNA1-EXSPCA30/40/50K		
General Performance	Wattage Adjustable	36W / 54W / 63W		
	Color Temperature	3000к / 4000к / 5000к		
	Lumens Adjustable	Max 8946Lm		
	Lumen Efficacy	Up to 142 LM/W		
	CRI (Ra)	>80		
	Diffuser Type	Clear		
	Beam Angle	189° Degree		
Electrical	Input Voltage	100-277V		
	Frequency	50/60Hz		
	Dimming	0-10V Dimmable		
	PF	≥0.9		
	THD	≤20%		
	Flicker Percent	<50%		
	Equivalent	120W CFL, 175W MHL/HPS/HID		
	Driver Surge Protection	L-N: 4kV		
	Operating Temperature	-40°C TO 50°C		
	Storage Temperature	-40°C TO 80°C		
	Operating Humidity	20% - 70% RH		
Physical	Storage Humidity	10% - 75% RH		
	LED Brand	Lumileds		
	LED Type	SMD2835		
	LEDs QTY	272 PCS		
	Housing	PC + Aluminum		
Qualification	Housing Color	White		
Quantication	IP Rating	IP64		
	Warranty	5 Year		



SKU # 1560768		Specifications			
Parameter	Description	Value			
	Model #.	AST-CLW08C-120WBCNA1-EXSPCA30/40/50K			
General Performance	Wattage Adjustable	80W / 100W / 120W			
	Color Temperature	3000к / 4000к / 5000к			
	Lumens Adjustable	Max 17040Lm			
	Lumen Efficacy	Up to 142 LM/W			
	CRI (Ra)	>80			
	Diffuser Type	Clear			
	Beam Angle	150° Degree			
	Input Voltage	120-277V			
	Frequency	50/60Hz			
Electrical	Dimming	0-10V Dimmable			
	PF	≥0.9			
	THD	≤20%			
	Flicker Percent	<5%			
	Equivalent	200W CFL, 400W MHL/HPS/HI			
	Driver Surge Protection	L-N: 6kV			
	Operating Temperature	-40°C TO 50°C			
	Storage Temperature	-40°C TO 80°C			
	Operating Humidity	20% - 70% RH			
Physical	Storage Humidity	10% - 75% RH			
	LED Brand	Lumileds			
	LED Type	SMD2835			
	LEDs QTY	494 Pcs			
	Housing	PC + Aluminum			
Qualification	Housing Color	White			
	IP Rating	IP64			
	Warranty	5 Year			




SKU # 1560816

Specifications


Parameter Description Value Model #. AST-CLW08C-200WBCNA1-EXSPCA30/40/50 Wattage Adjustable 80W / 150W / 200W	
Wattage Adjustable 80W / 150W / 200W	
	ЭК
Color Temperature 3000K / 4000K / 5000K	
General Performance Lumens Adjustable Max 28400Lm	
Lumen Efficacy Up to 142 LM/W	
CRI (Ra) >80	
Diffuser Type Clear	
Beam Angle 182.5° Degree	
Input Voltage 100-277V	
Frequency 50/60Hz	
Electrical Dimming 0-10V Dimmable	
PF ≥0.9	
THD ≤20%	
Flicker Percent <30%	
Equivalent 600W MHL/HPS/HID	
Driver Surge Protection L-N: 6kV	
Operating Temperature -40°C TO 50°C	
Storage Temperature -40°C TO 80°C	
Operating Humidity 20% - 70% RH	
Physical Storage Humidity 10% - 75% RH	
LED Brand Lumileds	
LED Type SMD2835	
LEDs QTY 455 Pcs	
Housing PC + Aluminum	
Housing Color White	
Qualification IP Rating DAMP Location	
Warranty 5 Year	





Correlated Color Temperature (CCT)

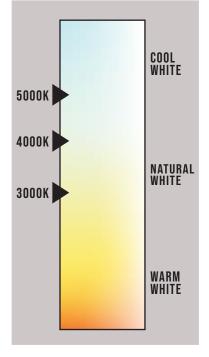


Dimensions











SKU: 1560814

Light Distribution Testing Parameters

Remark: The testing data comes from the product in luminaires.


Luminaire Property

Luminaire Manufacture: Luminaire Category: Lamp Catalog: Number of Lamps: Luminous Length (mm): Luminous Height (mm): Current: 0.285 A Power Factor: 0.985


Photometric Results

IES Classification: Type I Total Rated Lamp Lumens: 4203.3 Im Efficiency: 100% Upward Ratio: 21% COr0 Intensity: 134.73 cd Pos of Max. Intensity: H315 V71 Luminaire Description: Lamp Description: Luminous of Lamps: Luminous Width (mm): Voltage: 120.0 V Power: 33.72 W

Longitudinal Classification: Short Measurement Flux: 4203.3 lm Downward Ratio: 79% Luminaire Efficacy Rating (LER): 124.70 Max. Intensity: 761.39 cd

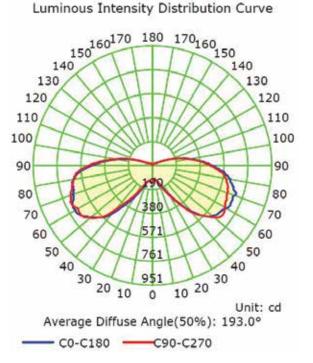

The Average Illuminance Effective Figure

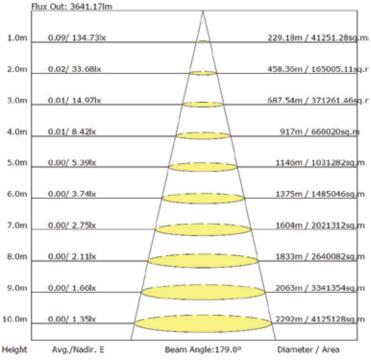



SKU: 1560815

Light Distribution Testing Parameters

Remark: The testing data comes from the product in luminaires.

Luminaire Property


Luminaire Manufacture: Luminaire Category: Lamp Catalog: Number of Lamps: Luminous Length (mm): Luminous Height (mm): Current: 0.530 A Power Factor: 0.992


Photometric Results

IES Classification: Type I Total Rated Lamp Lumens: 7603.6 Im Efficiency: 100% Upward Ratio: 20% COrO Intensity: 243.05 cd Pos of Max. Intensity: H270 V65

Luminaire Description: Lamp Description: Luminous of Lamps: Luminous Width (mm): Voltage: 120.0 V Power: 63.08 W

Longitudinal Classification: Very Short Measurement Flux: 7603.6 lm Downward Ratio: 80% Luminaire Efficacy Rating (LER): 120.59 Max. Intensity: 1394.54 cd

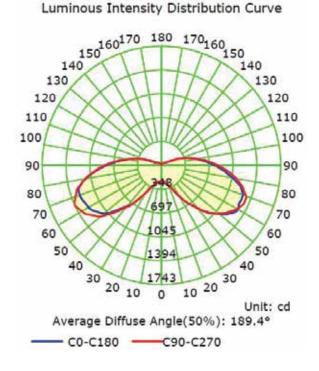

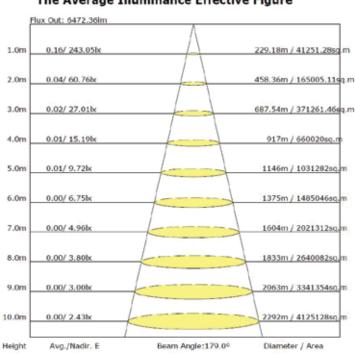

The Average Illuminance Effective Figure



SKU: 1560768

Light Distribution Testing Parameters

Remark: The testing data comes from the product in luminaires.

Luminaire Property

Luminaire Manufacture: Luminaire Category: Lamp Catalog: Number of Lamps: Luminous Length (mm): Luminous Height (mm): Current: 1.017 A Power Factor: 0.993

Luminaire Description: Lamp Description: Luminous of Lamps: Luminous Width (mm): Voltage: 120.0 V Power: 121.21 W

Photometric Results

 CIE Class: Direct
 Total Rated Lamp Lumens: 14835.9 lm

 Measurement Flux: 14835.9 lm
 Efficiency: 100%


 Downward Ratio: 97%
 Upward Ratio: 3%


 Field Angle(C0/C180,C90/C270,C45/C225,C135/315 : 191.3, 191.4, 191.9, 190.7
 Beam Angle(C0/C180,C90/C270,C45/C225,C135/315) : 146.9, 148.3, 148.1, 145.7

 Luminaire Efficacy Rating (LER) : 122.45
 C0r0 Intensity: 1442.33 cd

 Max. Intensity : 3660.22 cd
 Pos of Max. Intensity: H315 V52

 S/MH(C0/C180) : 2.66
 S/MH(C90/C270) : 2.66

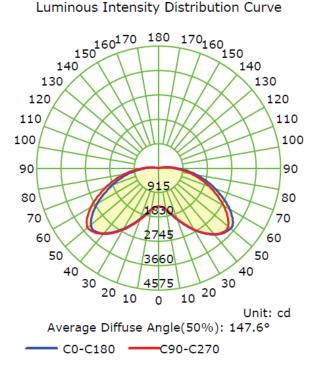

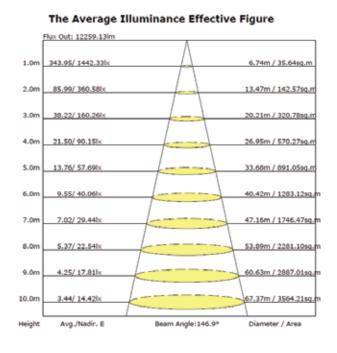



Installation

LED Corn Light Instruction



Can not use the electric generator to test the LED lamp. Please avoid using the led fixture in environment where there is smoke, sulfur, and corrosive substances. But if used in such environment, make sure the led fixture is well protected by an enclosed lampshade whose dimension is no less than below size, and whose material is either glass or semi-glass, semi-metallic. Surface of the lampshade shall not have any covering which prevents heat dissipation.

Watt	18W	27W	36W	45/54W	63/80W
Volume (IN)	12.60x7.48 x7.48	13.38x7.87x7.87	15 x7.87x7.87	16.53x8.26x8.26	16.53x9.05x9.05
Watt	100W	120W	150W	170W	200W
	10011	12011	13011		20011
Volume (IN)	17.32x9.45x9.45	17.32x10.23x10.23	11.81x11.81x18.50	11.81x11.81x18.50	11.81x11.81x18.50



Installation Instructions

Warning: Please make sure the power is off before installation.


- 1. Turn off the power switch.
- 2. Screw off the CFL or MHL or HPS and so on, see Figure (5)(6).

3. Take out led corn light and screw on, see Figure (1)(2)(3)(4). Figure (1)(2) (3) (4):AC internal driver,

(Note: Pls make sure to take off the ballast before installing led corn light, otherwise the ballast will produce the resonance of high voltage and makes led corn light breakdown.)


4. If security rope provided, pls fix the rope on the lamp with hand, then fix the wire of other end on the shell, see Figure (2) (4).

5. Turn on the power switch.(Finished!)

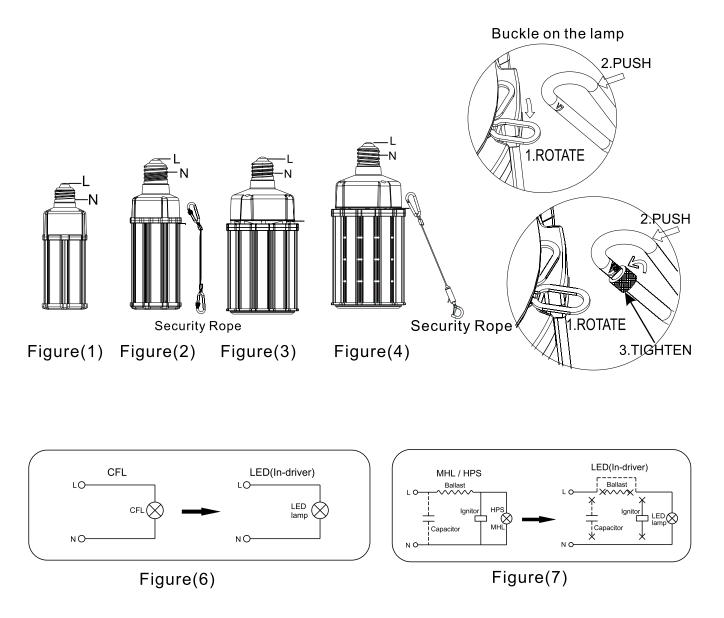



Wattage Adjustable

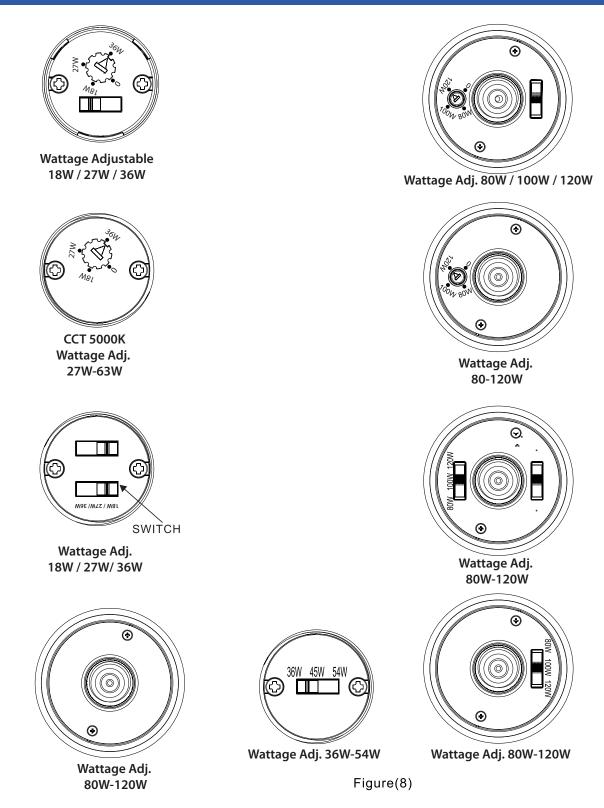

Installation

WARNING:

WARNING — Risk of fire or electric shock. LED Retrofit Kit installation requires knowledge of luminaries electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.

WARNING — Risk of fire or electric shock. Install this kit only in the luminaires that have the construction features and dimensions shown in the photographs and/or drawings and where the input rating of the retrofit kit does not exceed the input rating of the luminaire.

WARNING — To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects. Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

THE RETROFIT KIT IS ACCEPTED AS A COMPONENT OF A LUMINAIRE WHERE THE SUITABILITY OF THE COMBINATION SHALL BE DETERMINED BYAUTHORITIES HAVING JURISDICTION. PRODUCT MUST BE INSTALLED BYA QUALIFIED ELECTRICIAN IN ACCORDANCE WITH THE APPLICABLE AND APPROPRIATE ELECTRICAL CODES. THE INSTALLATION GUIDE DOES NOT LOCAL FOR SUPERSEDE OR NATIONAL REGULATIONS ELECTRICAL INSTALLATIONS. SUITABLE FOR DAMP LOCATIONS.

ADDED WEIGHT OF THE DEVICE MAY CAUSE INSTABILITY OF A FREE STANDING PORTABLE LUMINAIRE. USE ONLY WITH A PORTABLE TABLE LAMP THAT IS PROVIDED WITH A SHADE. USE IN PORTABLE TABLE LAMPS IN WHICH THE DISTANCE FROM THE BOTTOM OF THE BASE TO THE TOP OF THE LAMPHOLDER DOES NOT EXCEED THREE (3) TIMES THE MINIMUM BASE DIAMETER.

THIS DEVICE IS NOT INTENDED FOR USE WITH EMERGENCY EXITS" or "NOT FOR EMERGENCY LIGHTING. MIN. LAMP COMPARTMENT DIMENSIONS $(L \times W \times H)$



Packaging

	For	SKU	number	1560814
--	-----	-----	--------	---------

	Size (Inches)	Qty	Net Weight (LBS)	Gross Weight (LBS)		
Inner Box	3.54 x 3.54 x 9.64"	1PC	1.23	1.56		
Outer Box	14.96 x 11.42 x 10.43"	12PC	14.99	20.94		
For SKU number 1560815						
	Size (Inches)	Qty	Net Weight (LBS)	Gross Weight (LBS)		
Inner Box	3.54 x 3.54 x 11.61"	1PC	1.54	1.98		
Outer Box	14.96 x 11.42 x 12.40"	12PC	17.42	24.91		
For SKU number 1560768						
	Size (Inches)	Qty	Net Weight (LBS)	Gross Weight (LBS)		
Inner Box	5.31 x 5.31 x 12.40"	1PC	3.41	3.63		
Outer Box	16.53 x 11.22 x 13.18"	6PC	20.85	24.14		
For SKU number 1560816						
	Size (Inches)	Qty	Net Weight (LBS)	Gross Weight (LBS)		
Inner Box	5.31 x 5.31 x 12.40"	1PC	3.41	3.63		
Outer Box	16.53 x 11.22 x 13.18"	6PC	20.50	24.03		



Application







Application









Safety Precautions

To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.

Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.

Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.

For the installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code. To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects. Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

WARNING: RISK OF FIRE OR ELECTRICAL SHOCK

Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply. Turn off the power when you perform any maintenance. Verify that supply voltage is correct by comparing it with the luminaire label information. Make all electrical and grounded connections in accordance with the National Electrical Code and any applicable local code requirements. All wiring connections should be capped with UL approved wire connectors.

CAUTION: RISK OF INJURY

Avoid direct eye exposure to the light source while it is on. Account for small parts and destroy packing material, as these may be hazardous to children.

Warranty

5 Years Warranty.