
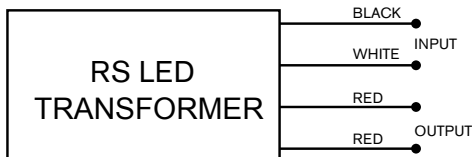
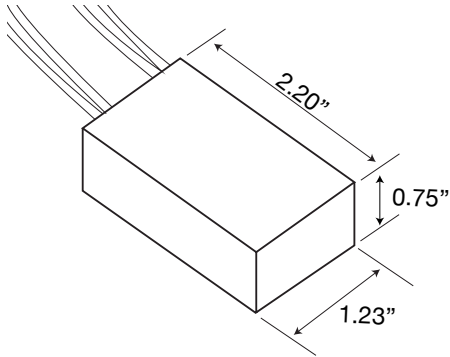


Hatch

120V Retro

Transformer

Cat. No. RS12-60M-LED



WIRING DIAGRAM

The Hatch RS12-60M-LED is a 60 Watt electronic transformer supplied with Hunza 120 Volt Retro fixtures with Promus drop-in LED lamps. It includes overload protection, short-circuit protection, full range dimming, waterproof potting and aluminium casing.

Input voltage: 120VAC

Input frequency: 50/60Hz

Input Current: .6A


Nominal output voltage: 12VAC

Power factor: 0.90

Ambient Temp.: -20° - +50°C

Max. Case Temp. (Tc) 85°C

Weight: 0.08kg (2.4oz)

Standards: RoHS, UL1310, Class P, Type1 Outdoor,  US

Ordering Code: RS12-60M-LED

HUNZA™ PURE
OUTDOOR
LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunzalighting.com

INTERNATIONAL CONTACTS:
www.hunzalighting.com/contact.php
Specifications may change without notice.
Manufactured in New Zealand.
2016 Hunza Productions Ltd.