



Model: **FB-150DB**
Direct Burial

Nightpower Transformer

DESCRIPTION

Model#: FB-150DB
Shown: Stainless Steel
Electrical Input: 120V, 277V
Electrical Output: 12-15V
Max. Watts: 150 Watts
Circuit: 1 Circuit

Model#: FB-300DB
Shown: Stainless Steel
Electrical Input: 120V, 277V
Electrical Output: 12-15V
Max. Watts: 300 Watts
Circuit: 1 Circuit



Model: IP68 Fitters
(recommended)



Wet Listed


SPECIFICATION FEATURES

The Forever Bright landscape lighting transformer series. Featuring multiple voltage outputs from 12-15 volts.

Stainless steel enclosure is rain-tight with hinged lockable cover and multiple knockouts throughout bottom and sides. Features include removable timer and field installed photocell. All units "plug and go" ready for field install accessories.

FEATURES & OPTIONS:

- STAINLESS STEEL NEMA STYLE RAIN-TIGHT KEYHOLE MOUNT ENCLOSURE
- LARGE WIRING VOLTAGE TAP LUGS
- COMPLETE WIRING INSTRUCTIONS
- 24 HOUR TIMER, FIELD INSTALLED
- PHOTOCELL, FIELD INSTALL
- 6' OUTDOOR LINE CORD
- LOW VOLTAGE CIRCUIT BREAKER, ONE BREAKER PROTECTING EACH OUTPUT CIRCUIT
- ETL 1838
- LIFETIME WARRANTY

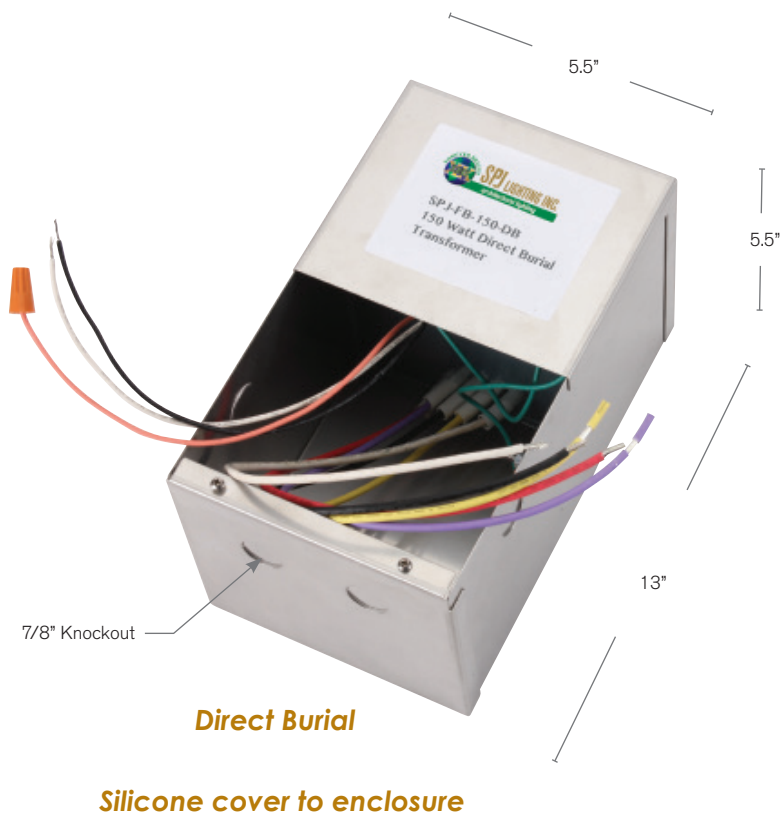

ORDERING INFORMATION

Model#	Electrical Input	Electrical Output	Wattage	Circuit
FB-150DB	120V	12-15V	150W	1
FB-150DB	120V	12-15V	150W	1
FB-300DB	277V		300W	