

# 4101SS Augusta

## Two Piece Base Cover



JOB NAME \_\_\_\_\_

MEMO \_\_\_\_\_

### Specifications

#### General

The 14-9/16" high by 12" diameter base cover shall be designed to fit 4" diameter fluted or smooth shaft poles. This base cover is designed to fit small diameter pole shafts and scaled to dress up street sign poles on residential and commercial sites.

The design of the base cover is historic and will match the Sternberg 4200 Augusta and the 5200 Barrington pole designs.


#### Construction

The two piece base cover shall be A356 Aluminum and shall be of sand cast construction. The two halves will mate and be secured with the use of four (4) 1/4-20 tamper resistant Allen (hex socket) stainless steel screws. Feet, on the bottom of the casting, will support the base casting on the pole base plate keeping the casting from making contact with the ground but creating an aesthetically pleasing assembly.

#### Installation


Remove the four (4) tamper resistant Allen (hex socket) stainless steel screws from the castings. Separate the two halves of the base casting. Position the two cast halves so that the foot of each rests on the pole base plate. Reinstall the four (4) tamper resistant Allen (hex socket) stainless steel screws to hand tight after applying anti-seize compound (not supplied) to the screw threads.

### 12" Diameter Base x 14-9/16" High

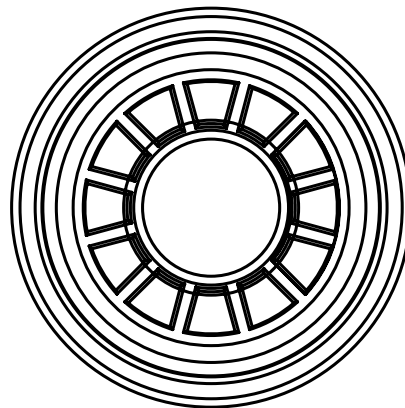

THROAT  
← 4-1/8" →

14-9/16"

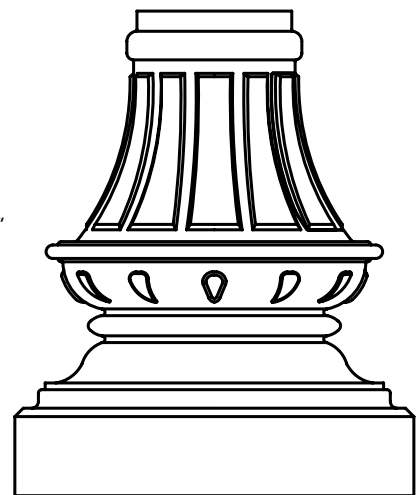

12"

Specify pole diameter and pole base plate size when ordering.



**SternbergLighting**

ESTABLISHED 1923 / EMPLOYEE OWNED

800-621-3376  
555 Lawrence Ave., Roselle, IL 60172  
contactus@sternberglighting.com  
www.sternberglighting.com

2021/02 STERNBERG LIGHTING. ALL RIGHTS RESERVED. PRINTED IN THE USA.