

# 6130A HISTORIC SERIES

# **SPECIFICATIONS**

#### **GENERAL**


The 6130A Historic is a modern replica of an elegantly styled fixture featuring a tapered six sided cage and roof. It shall be appointed with a cast aluminum decorative finial. It features a stately fluted domed shape roof with a tall finial.

#### **POST FITTER**

The fitter shall be heavy wall cast aluminum, 356 alloy for high tensile strength. It shall have an inside diameter opening to attach to a 3" pole or tenon. When ordered with a Sternberg pole, the fitter shall be set screwed to the pole top or tenon.

### **BALLAST HOUSING**

The ballast housing shall be heavy wall cast aluminum, 356 alloy for high tensile strength. The housing shall be mounted to the cast fitter with one screw. The ballast shall be attached against the ballast housing by 4 studs to ensure high capacity

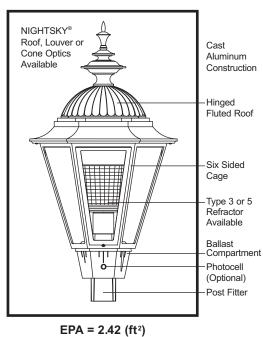

EPA =  $2.42 \text{ (ft}^2\text{)}$ WEIGHT = 40 LBS

heat sinking of ballast temperatures, keeping the ballast cooler and ensuring long life.

#### **ELECTRICAL**

Fixture shall be U.L. or E.T.L. listed in U.S. and Canada. H.I.D. ballasts shall be high power factor with lamp starting down to -30 degrees C. Medium base and mogul base porcelain sockets are 4KV rated. The ballast/socket assembly shall be pre-wired when ballast is located in the fitter. All compact fluorescent (PL) ballasts shall be instant start electronic with a starting temperature of down to 0 degrees F. They shall have a 4-pin socket to accept quad or triple tube lamps. Ballasts shall be DOE EISA compliant.

#### **FIXTURE HOUSING**

The fixture shall be 21" wide and 43" tall. It shall be made of heavy wall cast aluminum, 356 alloy and lenses will be made of vandal resistant acrylic, available in clear, clear seeded, clear textured, prismatic and white acrylic. Ballast is accessible from inside the lamp compartment.

### **OPTICAL OPTIONS**


Refractors shall be 6" diameter borosilicate glass with an I.E.S. Type 3 (RE3) or Type 5 (RE5) distribution. It shall be secured to the socket stem with  $^{3}/8$ " plated steel threaded pipe nipple and rest on a cast aluminum holder with anti-shock gasket. The refractor will be secured to cast holder with a quarter-turn internal aluminum twist ring for ease of maintenance.

The NIGHTSKY® OPTI-SHIELD® Louver Optic System (LO) shall be a multi-tier reflector with 7" diameter rings to produce an I.E.S. Cut-off Type 3 or 5 distribution. The Louver Optic System shall be made of highly specular anodized aluminum and shall come standard with medium base socket.

**NIGHTSKY® STAR-SHIELD® Roof Optics** distribution shall be delivered by multi-segmented roof mounted reflector systems which eliminate uplight and provide cut-off. The reflector cavity shall be made of specular anodized aluminum. Roof Optics Type 2 (RO2), Type 3 (RO3), Type 5 (RO5) horizontal are available for medium base lamps.

# 6130A HISTORIC

# FIXTURES / FITTERS / ARMS PM - WB

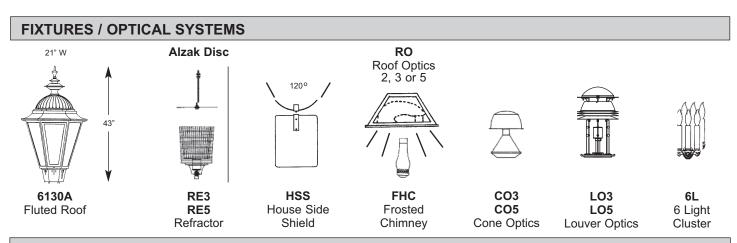

### **LENSES**















## ARMS - POST MOUNT (PM) or WALL BRACKETS (WB)

### See Arms Section for more information

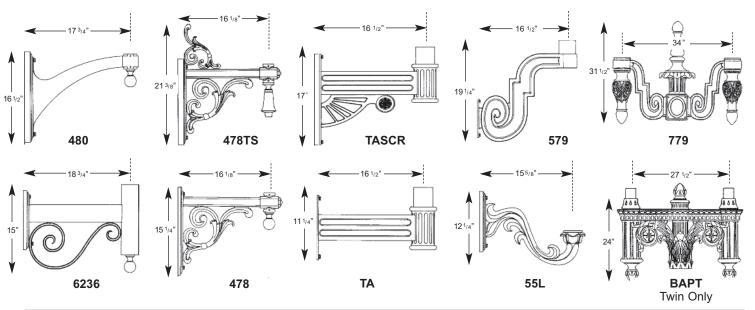

# HANGING TYPES PIER BASE MOUNT







# **BUILDING A PART NUMBER**



### **POST & ARM FIXTURES**

6130A/478PM

CENTER

ARM MOUNTED FIXTURE POST TOP FIXTURE

(PT)

**POST** POST CAP LIGHT SOURCE **BALLAST** 

**OPTICS** 

OPTIONS LENS FINISH

NO. OF ARMS

FIXTURE / POSTARM

**FIXTURE** 6130A

(See Post Section) WATTS/TYPE/VOLTS

RO3/FHC

PEC<sub>1</sub>

BK



WALL FIXTURES

LIGHT SOURCE

**OPTICS OPTIONS**  LENS **FINISH**  PIER FIXTURES

Uses same information boxes as wall fixture

6130A/450PB

FIXTURE / FITTER / PIER BASE

FIXTURE / WALLBRACKET

6130A/480WB

**BALLAST** WATTS/TYPE/VOLTS

100 HPS120

RE5

35HPS1

50HPS

70HPS

100HPS

150HPS

250HPS

50MHP

70MHP

100MHP

150MHP

200MHP

250MHP

26PLT

32PLT

INCAND

42PLT

5412FP5

PEC<sub>1</sub> CA BK

100HPS120

### PART NUMBER SELECTIONS

• 478PM

6236PM

579PT

779PT

BAPT

TAPT

TASCRPT

# **FIXTURE**

6130A

### **OPTICS**

- RE3
- RE5
- ALZAK
- HSS
- LO3
- LO5
- RO2<sup>4,5</sup>
- RO3<sup>4, 5</sup>
- RO5<sup>4,5</sup>
- FHC<sup>2</sup>
- CO3
- CO5 6L
- **VOLTAGES**
- 120
- 208
- 240
- 277
- 480
- MULTI
- (120-277)

# **POST ARMS**

### WALL **BRACKET ARMS**

- 478TSPM 478WB 480PM
  - 478TSWB
- 480DPM 480WB 55LPM
  - 480DWB

  - 55WB
  - 6236WB
  - 579WB

  - TAWB
  - TASCRWB

### PIER MOUNT

### 450PB

### **LENSES**

- CSA
- CA
- CTA
- PA
- WA

#### LAMPS 6 BALLASTS 3,6

- HPS35/MED
  - HPS50/MED
  - HPS70/MED
  - HPS100/MED
  - HPS150/MED
  - HPS250/MOG/ED18
  - MHP50/MED
  - MHP70/MED
  - MHP100/MED
  - MHP150/MED

  - MPH200/MOG/ED28 MPH250/MOG/ED28
  - PLT26
- PLT32
- PLT42

#### **HANGING TYPE**

- CH44
- SH44

### STANDARD FINISHES\*

- BKT **Black Textured**
- WHT White Textured
- PGT Park Green Textured
- ABZT Architectural Medium **Bronze Textured**
- DBT **Dark Bronze Textured**

\*Smooth Finishes are available upon request

### **CUSTOM FINISHES**

- OI Old Iron
- RT Rust
- WBR Weathered Brown
- CD Cedar
- Weathered Black WBK
- Two Tone TT

### STERNBERG SELECT **FINISHES**

- VG Verde Green SI Swedish Iron
- OWGT Old World Gray
  - Textured

### **OPTIONS**

- PEC1 Photocell-Bimetal 120 Volt
- PEC2 Photocell-Bimetal 208-277 Volt
- PEC1-E Photocell-Electronic 120 Volt
- PEC2-E Photocell-Electronic 208-277 Volt FHS Single Fuse and Holder-120,277 Volt
- FHD Dual Fuse and Holder-208, 240, 480 Volt
- PF Pineapple Finial or Font (TA, TASCR) • BF Ball Finial or Font (TA, TASCR)
- · LAMPS Select from List

### NOTES:

- 35 HPS is 120 volt only.
- <sup>2</sup> MED base only when used to house lamp.
- 3 Medium base sockets standard with ballasts up to 150 watts HID. Mogul base sockets are standard
- with ballasts 200 watts and over. 4-pin for PL.
- 4 Medium base lamp only. Consult factory for mogul base.
- 5 Can support PLH or PLT up to 60 watts. <sup>6</sup> Metal halide systems are pulse start.
- 7 Consult factory for limitations.





# 6130A HISTORIC SERIES

# **SPECIFICATIONS**

LIST NO. 6130A HISTORIC SERIES **Frosted Hurricane Chimney** (FHC) is an optic option which adds an authentic touch and can be used with Roof Optics.

**Cone Optics Type 3** (CO3) distribution or Type 5 (CO5) distribution uses a vertically mounted lamp inside a highly specular reflector system to provide a reduction of uplight with a wide lighting span.

**House Side Shield** (HSS) is an option which will block up to 120° of light in any one direction.

**6-Light** (6L) candelabra set is an option for incandescent application.

### **PHOTOCELLS**

Photocells shall be either the thermo bi-metal button type or the electronic button type. On single post top fixtures the photocell shall be mounted in the fitter and pre-wired to ballast. On multiple head fixture assemblies photocells shall be mounted in the pole shaft on an access plate and are not pre-wired as ballast housing assemblies and fitters are packaged separately for ease of wiring to source. The thermo bi-metal photocell shall be designed to turn on at 1.0 footcandle and turn off at not more than 5 footcandles. The electronic button type photocell is instant on and a 5-10 second turn off and shall turn on at 1.5 footcandles with a turn-off at 2-3 footcandles. Photocells are either 120 volt or 208 thru 277 volt.

#### **ARMS**

All arms are made of cast aluminum and/or extruded aluminum. Arms with decorative filigree have meticulously detailed scroll work and gracefully curved brackets. All 6130A fixtures will have its fitter welded or mechanically attached to the arm at the factory to ensure arms will be plumb, secure and level over the life of the installation. Each arm shall be bolted to a post mount adapter, which is welded to the pole to ensure proper alignment to the base. Twin TA, TASCR and 579 arms will be attached to a decorative center hub which will slip-fit the center tenon of the pole (not shown). BA and 779 arms are available as a twin application. Arms are pre-wired for ease of installation.

### **FINISH**

Prior to coating, each assembly shall be chemically cleaned and etched in a 5-stage washing system which includes alkaline cleaning, rinsing, phosphoric etching, reverse osmosis water rinsing, and non-chrome sealing to ensure corrosion resistance and excellent adhesion for the finish coating. The finish coating shall be electrostatically applied semi-gloss, super durable polyester powder baked at 400 degrees for a durable and superior, color retentive finish. Our optional antique Verde Green finish and Swedish Iron finish are hand brushed using a 3-step process. The total assembly shall be wrapped in shockproof wrapping or fully enclosed in corrugated cartons.

### **WARRANTY**

Five-year limited warranty. See product and finish warranty guide for details.



