

1270 MISSION SERIES

SPECIFICATIONS

GENERAL


The 1270 Mission fixture is a large scale, dramatic Mission era squared edge design. It features a tall, straight four-sided decorative cast cage, a simple, straight edge grille design, cast ballast housing assembly, acrylic lens and a dramatic flat cantilever roof design. The roof shall be appointed with an aluminum ring finial.

POST FITTER

The fitter or base shall be heavy wall cast aluminum, 356 alloy for high tensile strength. It shall have an inside diameter opening to accept a 4", 5" or 6" square or round pole or tenon. When ordered with a Sternberg aluminum pole, the fitter shall be set screwed to the pole top or tenon.

BALLAST HOUSING

The ballast housing shall be heavy wall cast aluminum, 356 alloy for high tensile strength. The housing shall be cast as

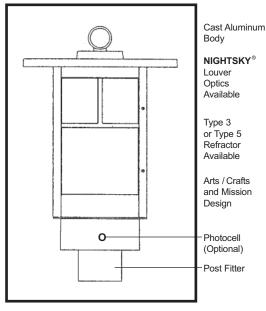

 $EPA = 3.71 (ft^2)$ WEIGHT = 53 LBS

an integral part of the fitter to prevent water entry into the ballast compartment and to ensure high capacity heat sinking of ballast temperatures, keeping the ballast cooler and ensuring long life. The ballast mounting plate shall be cast aluminum and provide tool-less removal from the housing using 2 ea finger latches.

ELECTRICAL

Fixture shall be U.L. or E.T.L. listed. H.I.D. ballasts shall be high power factor with lamp starting down to -30 degrees C. Medium base and mogul base porcelain sockets are 4KV rated. The ballast/socket assembly shall be pre-wired when ballast is located in the fixture. All compact fluorescent (PL) ballasts shall be instant start electronic with a starting temperature of down to 0 degrees F. They shall have a 4-pin socket to accept quad or triple tube lamps. Ballasts shall be DOE EISA compliant.

FIXTURE HOUSING

The 1270 fixture shall be 19 ³/₄" wide and the overall height shall be 32 ¹/₂". It shall be made of heavy wall cast aluminum, 356 alloy and lenses will be made of vandal resistant acrylic, available in clear (CA), clear seeded (CSA), clear textured (CTA), prismatic (PA), white acrylic (WA) and art glass (AGB). The 1270 fixture features a cast 12" wide window body with simple, straight edge cast grille work design. The 19 ³/₄" flat square roof shall cantilever the fixture body.

OPTICAL OPTIONS

Refractors shall be 6"diameter borosilicate glass with an I.E.S. Type 3 (RE3) or Type 5 (RE5) distribution. It shall be secured to the socket stem with ³/8" plated steel threaded pipe nipple and rest on a cast aluminum holder with anti-shock gasket. The refractor will be secured to cast holder with a quarter-turn internal aluminum twist ring for ease of maintenance.

The **NIGHTSKY® OPTI-SHIELD® Louver Optic System** (LO) shall be a multi-tier reflector with 7"diameter rings to produce an I.E.S. Cut-off Type 3 or 5 distribution. The Louver Optic System shall be made of highly specular anodized aluminum and shall come standard with medium base socket.

P1PBPier Base


HSCWB Single Arm

1270 MISSION

HMAWB Single Arm

1-14

FIXTURES/FITTERS/ARMS PM-WB

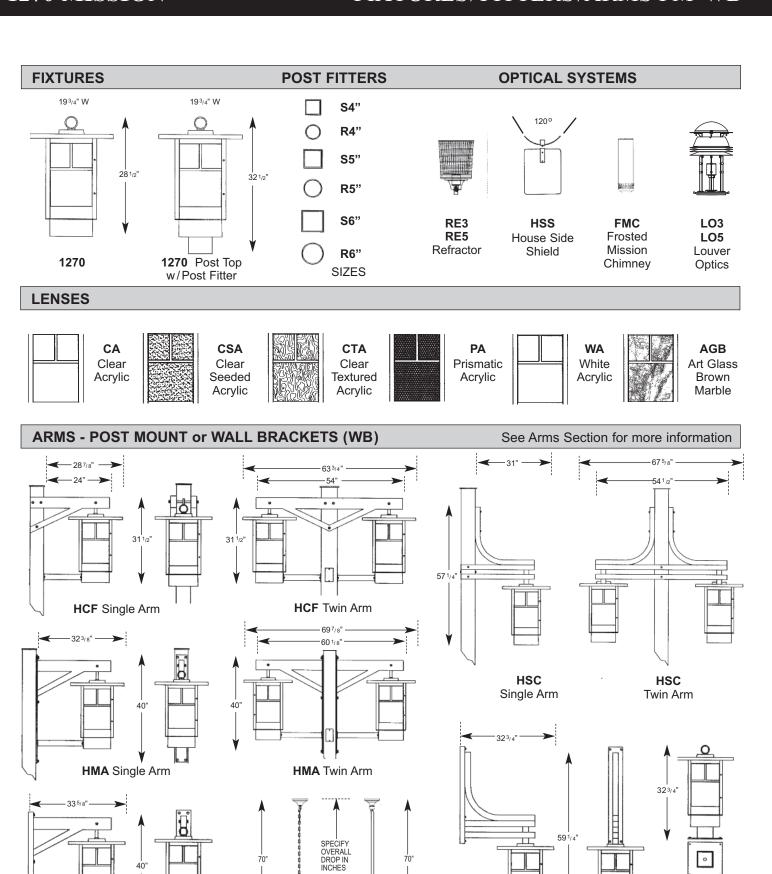

HSH44

Stem Hung

HCH44

Chain Hung



BUILDING A PART NUMBER

POST & ARM FIXTURES

CENTER ARM MOUNTED FIXTURE POST TOP FIXTURE (PT) NO. OF ARMS FIXTURE/POSTARM FIXT./FITTER 1270/HCF 2

POST CAP

SC

LIGHT SOURCE BALLAST

OPTIONS

0

LENS

FINISH

(See Post Section)

POST

6SQ15

WATTS / TYPE / VOLTS 100 MHP120

BKT

OPTICS

PEC WA BKT



WALL FIXTURE

FIXTURE /

WALL BRACKET

1270/HMAWB

LIGHT SOURCE **BALLAST** WATTS/TYPE/VOLTS

100 MHP120

OPTICS

OPTIONS

LENS FINISH

PIER FIXTURES Uses same information boxes as wall fixture

1270/P1PB



HANGING FIXTURES

FIXTURE / HANGING BRACKET 1270/HCH44

OVERALL DROP IN INCHES

LIGHT SOURCE **BALLAST** WATTS/TYPE/VOLTS

RE5

OPTICS

WA

OPTIONS

LENS

FINISH

70 INCHES

100 MHP120

FMC

CA

BKT

FIXTURE / PIER BASE

PART NUMBER SELECTIONS

FIXTURES 1270

FITTERS

- S4
- R4 S5
- R5
- S6
- R6

OPTICS

- RE3
- RE5 HSS
- FMC²
- LO3² LO5²

POST ARMS

- · HSC single
- HSC twin · HMA single
- · HMA twin
- · HCF single
- · HCF twin

VOLTAGES

- 120
- 208
- 240 277
- 480
- MULTI (120 - 277)

WALL

- **BRACKET ARMS**
- HMAWB
- HSAWB

PIER BASE

P1PB

LENSES

- CA CSA
- CTA
- PA
- WA
- AGB

HANGING BRACKETS

- HCH44
- HSH44

BALLASTS^{3, 4} LAMPS⁴

- 35HPS¹
- 50HPS
- 70HPS
- 100HPS
- 150HPS
- 250HPS 50MHP
- 70MHP
- 100MHP
- 150MHP
- 200MHP 250MHP

- HPS35/MED
- HPS50/MED
- HPS70/MED HPS100/MED
- HPS150/MED
- HPS250/MOG/ED18
- MHP50/MED
- MHP70/MED
- MHP100/MED
- MHP150/MED
- MHP200/MOG/ED28
- MHP250/MOG/ED28

STANDARD FINISHES*

- BKT **Black Textured** WHT White Textured
- PGT Park Green Textured
- Architectural Medium ABZT **Bronze Textured**
- DBT **Dark Bronze Textured**

*Smooth Finishes are available upon request

CUSTOM FINISHES

- OI Old Iron
- RT Rust
- **WBR** Weathered Brown CD Cedar
- **WBK** Weathered Black
- TT Two Tone

STERNBERG SELECT **FINISHES**

- VG Verde Green
- SI Swedish Iron · OWGT Old World Gray **Textured**

OPTIONS

- PEC Photocell-Electronic 120-277 Volt
- FHS Single Fuse and Holder-120, 277 Volt
- FHD Dual Fuse and Holder-208, 240, 480V
- · QR Quartz Re-Strike
- · LAMPS Select from List

NOTES:

135 HPS is 120 volt only. ²MED base only when used to house lamp

Mogul base sockets are standard with ballasts 200 watts and over. 4-pin for PI

with ballasts up to 150 watts for HID.

³ Medium base sockets standard 4 Metal halide systems are pulse start.





1270 MISSION SERIES

SPECIFICATIONS

LIST NO. 1270 MISSION SERIES Frosted Glass Mission Chimney (FMC) is an optic option which adds an authentic touch.

House Side Shield (HSS) is an option which will block up to 120° of light in any one direction.

QUARTZ RE-STRIKE

The 1270 fixture can be supplied with an optional quartz re-strike system to retain constant fixture light if the H.I.D. lamp fails. The fixture will be equipped with a 100 watt quartz lamp and a controller to run on a 120 volt circuit and must be used in conjunction with a 120 volt or multitap ballast.

PHOTOCELLS

Photocells shall be the electronic button type. On single post top fixtures the photocell shall be mounted in the fitter and pre-wired to ballast. On multiple head fixture assemblies photocells shall be mounted in the pole shaft on an access plate and are not pre-wired as ballast housing assemblies and fitters are packaged separately for ease of wiring to source. The electronic button type photocell is instant on and a 5-10 second turn off and shall turn on at 1.5 footcandles with a turn-off at 2-3 footcandles. Photocells are 120-277 volt.

ARMS

All arms are made of cast aluminum and/or extruded aluminum. Arms with decorative filigree have meticulously detailed scroll work and gracefully curved brackets. All 1270 fixtures shall be bolted to the arm to ensure arms will be plumb, secure and level over the life of the installation.

FINISH

Prior to coating, each assembly shall be chemically cleaned and etched in a 5-stage washing system which includes alkaline cleaning, rinsing, phosphoric etching, reverse osmosis water rinsing, and non-chrome sealing to ensure corrosion resistance and excellent adhesion for the finish coating. The finish coating shall be electrostatically applied semi-gloss, super durable polyester powder baked at 400 degrees for a durable and superior, color retentive finish. Our optional antique Verde Green finish and Swedish Iron finish are hand brushed using a 3-step process. The total assembly shall be wrapped in shockproof wrapping or fully enclosed in corrugated cartons.

WARRANTY

Five-year limited warranty. See product and finish warranty guide for details.

