



GENERAL PRODUCT INFORMATION:


These fixtures are intended to be installed utilizing NEC compliant junction boxes.



This product is suitable for damp locations.


This product may be dimmed with a low-voltage electronic dimmer.

This instruction shows a typical installation.

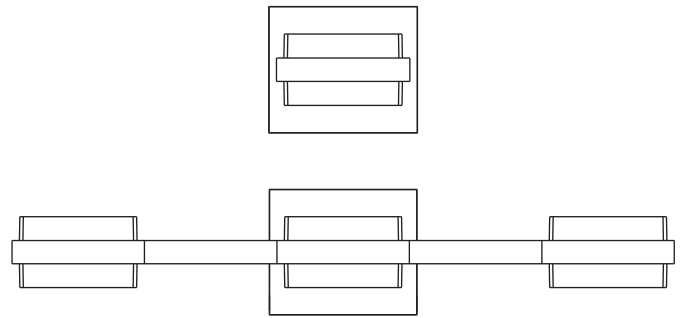

CAUTION - RISK OF FIRE
 This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
 Use minimum 90°C supply conductors.

Install the Fixture

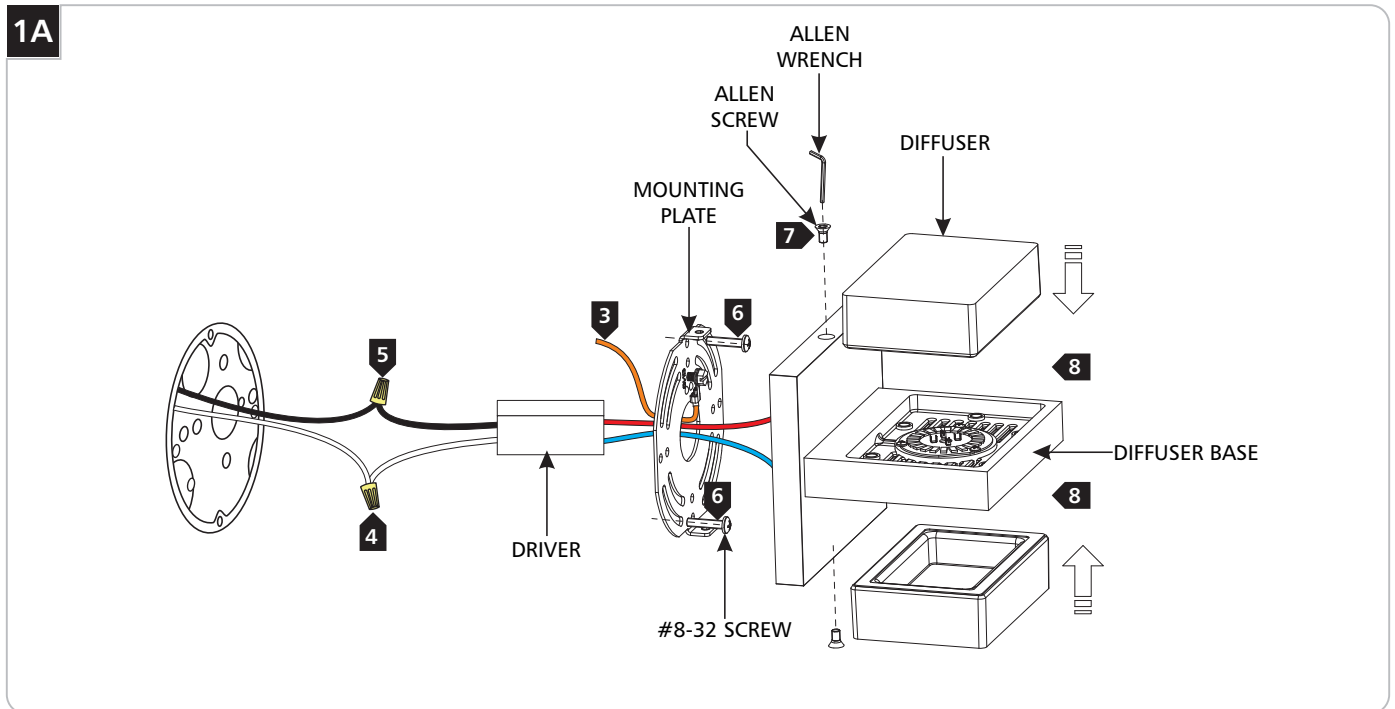

- 1** With the provided Allen wrench, remove the Allen screws on both sides of the fixture base.
- 2** Remove the mounting plate from the back of the fixture.
- 3** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 4** Connect the white driver wire to the neutral power line.
- 5** Connect the black driver wire to the hot power line.
- 6** Properly place the driver, all wires, and wire nut connections into the electrical box, and attach the mounting plate to the electrical box using the two provided #8-32 screws.
- 7** Mount the fixture back onto the mounting plate and reinstall Allen screws (reversal of step 1A).
- 8** If necessary, install the diffusers into the diffuser bases which are secured together by magnets.

SAVE THESE INSTRUCTIONS!



7400 Linder Ave, Skokie, IL 60077
847.410.4400

www.techlighting.com

© 2018 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company