

weminder

Gentle reminders. Familiar voice.



Features

- Smart reminders
- One button control
- Program by smartphone app
- Light & portable
- Long battery life



Smart reminders



One Button Control




Programmed by APP



Light and Portable



Cloud Storage



Long Battery Life

Package Includes

- 1 x weminder
- 1 x CR123A battery
- 1 x Lanyard



weminder




CR123A battery



Lanyard

weminder unit

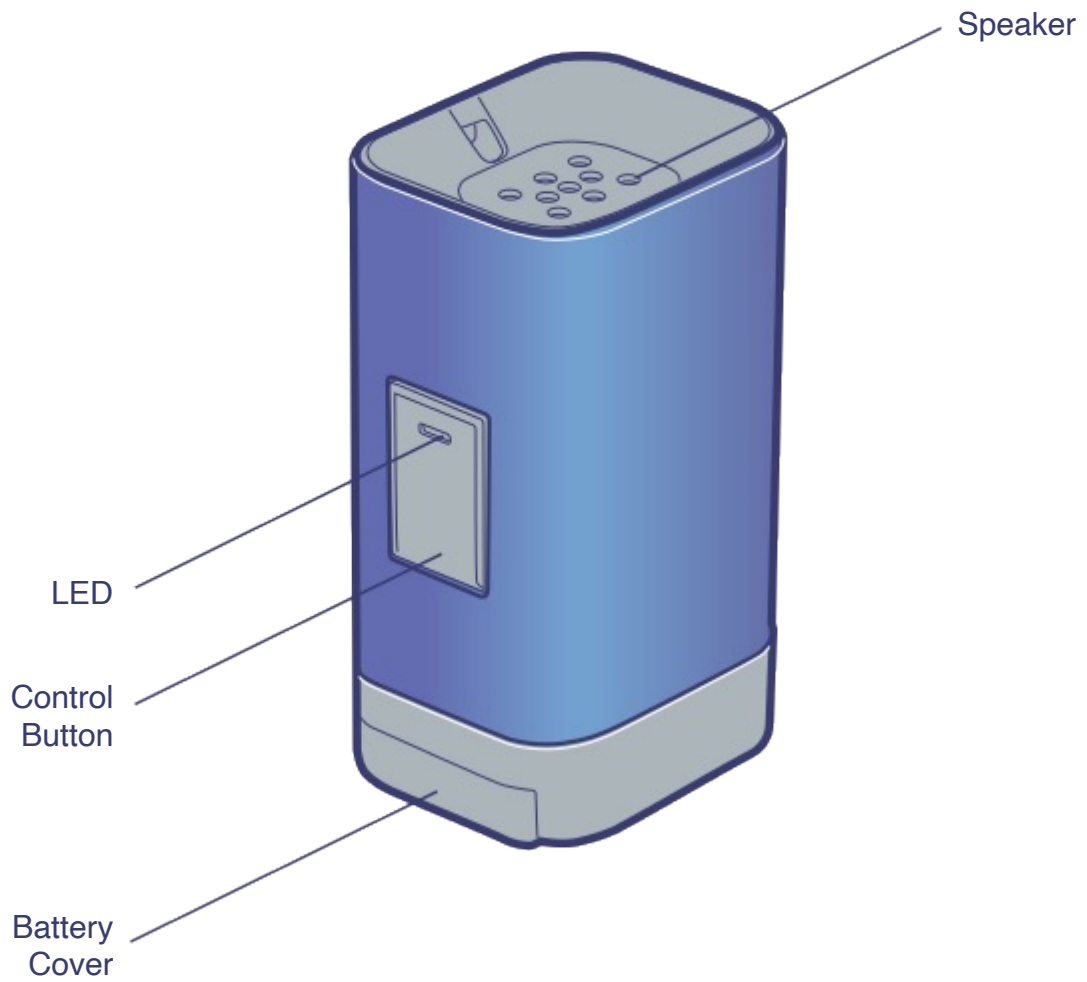

First time use

1. Install **weminder** APP: Download and install the weminder APP in App Store (iOS) or Google Play (Android) on your smart phone.



Weminder APP

2. Create and schedule voice reminders in your weminder APP.

iOS



<https://apps.apple.com/hk/app/weminder-audio-reminders/id1541585653>

Android







<https://play.google.com/store/apps/details?id=com.jlworld.weminder>

Sync your voice reminders to the weminder unit

1. Make sure the weminder is nearby your smartphone.
2. Power ON the unit: Open the battery cover, insert the battery into the battery compartment and close the battery cover.
3. The weminder device will enter pairing mode directly.
4. Enter the “Settings ⚙️” menu, tap “Sync data to device” to synchronize your weminder device with APP.

Press the button and hold for 4 seconds to enter the sync mode.

- Pairing mode: Green and red light blinking alternatively.
 - Sync mode: Green light ON continuously.
 - Syncing data: Green light blinking.
5. Tap “Close” after synchronization is done.

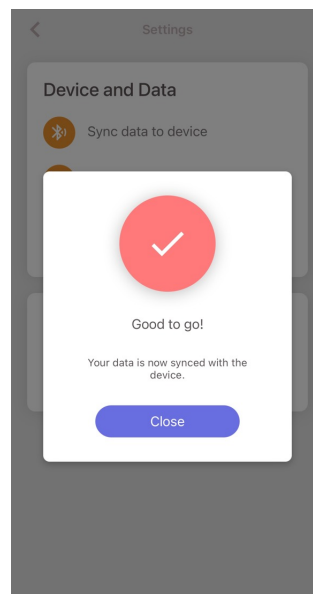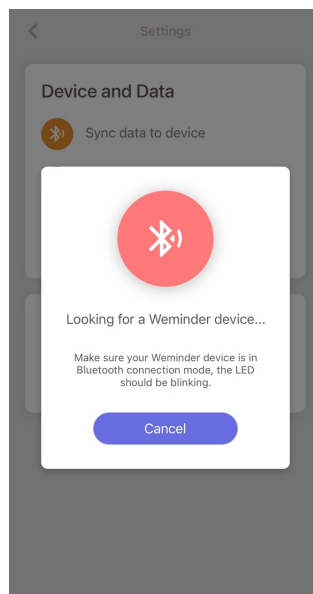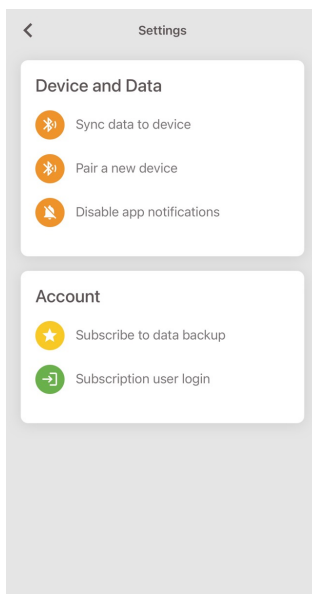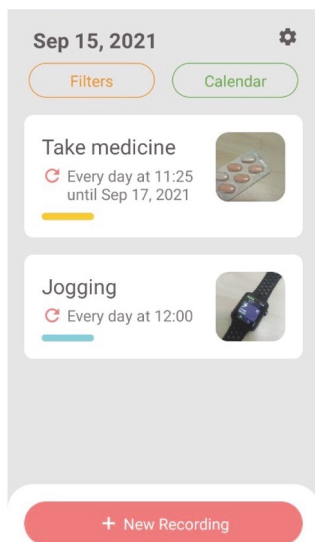


Operation

- The weminder will ring at scheduled time. Just simply press the button to hear the voice messages.
 - You can press the button again to hear the last voice message.
 - If you miss the scheduled time, weminder will ring every one minute (first 10 minutes) or five minutes (after 10 minutes) until button press.
 - The voice message will expire after 30 minutes of the scheduled time.
2. Enter the Sync mode: Press and hold the button of your weminder device for 4 seconds.
 3. After the APP has connected to your weminder, the APP will synchronize with the your weminder.
 4. Tap “Close” after synchronization is done.

Adding new voice reminders to your weminder unit

1. In weminder APP, enter the “Settings 

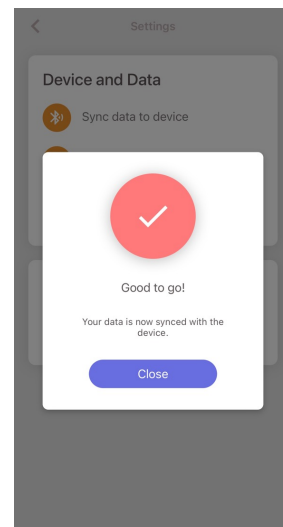

Low battery warning

A red LED will blink slowly (every 15 seconds) if the battery voltage level is low. Replace with a new battery and sync the weminder unit to your smartphone again.

Product Specification


Mechanical Specification

Dimensions: 52 x 25 x 30mm
Casing material: Aluminum alloy,
ABS plastic

Electrical Specification

Operating Voltage: 3V
Standby Current: 1mA
Operating Current: 500mA
Sound Pressure Level
(at 10cm, 1W): 97dB
Battery: CR123A

Battery installation

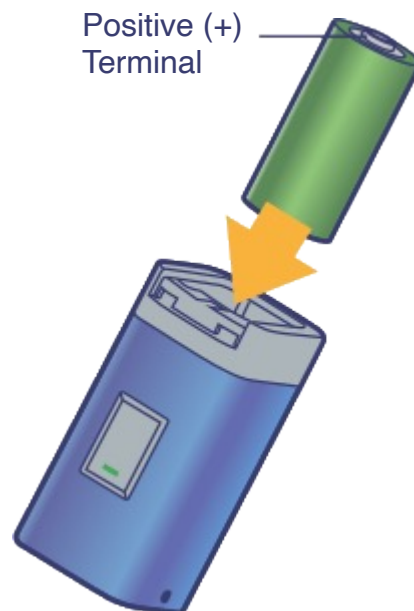

Wireless Specification

Bluetooth 5 BLE
2.4GHz Transceiver
Receiver Sensitivity:
-96 dBm at 1Mbps Data Rate

Bluetooth Module Certification:

- FCC ID: X8WBT832
- IC ID: 4100A-BT832
- CE: Certified
- TELEC: 201-180944
- Australia/New Zealand: Certified
- QDID: 97989

Battery warning

- Do not short or charge the battery.
- Do not over-discharge, crush, incinerate or disassemble the battery.
- Do not apply heat to the battery.
- Replace the battery when low battery warning is ON.
- Dispose of depleted battery safely.



Disposal and Recycling Information

The symbol on the product and packaging is in accordance to European Union Waste Electrical and Electronic Equipment (WEEE) Directive. When this product reaches its end of life, take it to a collection point designated by local authorities. The separate collection and recycling of waste will help conserve natural resources and help protect the environment.

European Compliance Statement

JL World Corporation Limited hereby declares that this device is in compliance with the essential requirements and other relevant provisions of the R&TTE Directive.

©2021 JL World Corporation Limited. All rights reserved.