

KNVM-08A2 (+Mouse Switch +Broadcast Mode) KNVM-08A1 (+Mouse Control) KNVM-08A0




### 4K UHD 8 Ports KVM Switch with **Mouse Switch & Broadcast** Features

# Specifications

		KNVM-08Ax	
Video Resolution (Max.)		4K UHD (3840 x 2160) @30Hz	
HDCP Compliant		Yes	
EDID Function		Copy & Auto Learning	
PC Interface	Video in	HDMI x 8	
	USB HID	USB-B x 8	
Console Inter- face	Video out	HDMI x 1	
	USB HID	USB-A x 4	
Push Button / LED Indicators	Status LED	LED x 1	
	Port LED	PC Ready x 8, Green Port Selected x 8, Red	
	Push Button	Port Select x 8 EDID Copy x 1(Rear)	
Control Methods		Push Button Hotkey Control <b>Mouse Switch Mode</b> (Depend on Model)	
Enclosure		Metal	
Power Supply *		DC 12V	
Dimensions H x W x D (mm)		44 x 436 x 180	

\*Models with Built-in Power Adaptor Also Available : KNVM-08QA0, KNVM-08QA1, KNVM-08QA2

## Connection Pattern

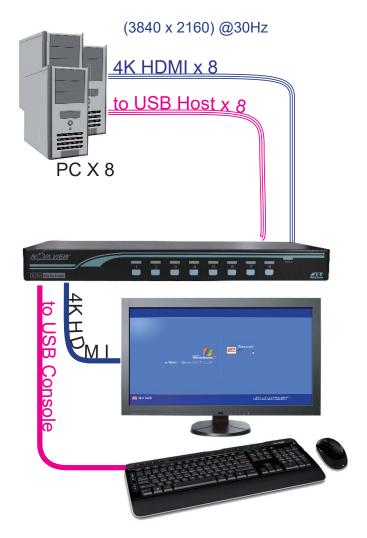

- 8 Port 4K HDMI KVM Switch Can Switch Among Eight Computer with 4K UHD (3840 x 2160) @30Hz HDMI Sources
- Compatible with Most Popular Screen Resolutions Up to 4K UHD (3840 x 2160) @ 30Hz
- **HDCP** Engine Support on Each Port to Ensure Uninterrupted Video Playback
- Provide 3 Ways to Control The Unit Via

   (1) Front Panel Push Button
   (2) Hotkey Control
   (3) Mouse Switch
- USB HID Support & Hot Swap
- EDID Copy & Auto Learning
- Windows & Mac Support

## Highlighted Features

- Mouse Switch Mode Enables Switch via Mouse Buttons & Mouse Wheel
- **Broadcast Mode** Enables Actions Simultaneously Sent to All 8 Identical PCs
- Built-in Power Adapter Models Also Available (See Chart Below)

Order Information						
Model	Mouse Control	Broadcast Mode	4K HDMI	Built-in Power Adaptor Models		
KNVM-08A0	-	-	V	KNVM-08QA0		
KNVM-08A1	V	-	V	KNVM-08QA1		
KNVM-08A2	V	V	V	KNVM-08QA2		





KNVM-08A2

KNVM-08A2

#### www.rextron.com

NAA011