




Web: <https://flow.audio>  
 Email: [hello@flow.audio](mailto:hello@flow.audio)  
 Support: [support@flow.audio](mailto:support@flow.audio)

Audioflow® is a brand of  
 Efficient Technology Ltd  
<https://efficient.technology/>

## AUDIOFLOW 3S-3Z

### 3 WAY SMART SPEAKER SWITCH

Connect up to three pairs of speakers to your stereo amplifier. Control the switch with the manual touch buttons on the front of the unit, contact closure connections on the rear or via Wi-Fi with the Audioflow app for iOS / Android or the Amazon Alexa Voice Assistant. Made in the UK.

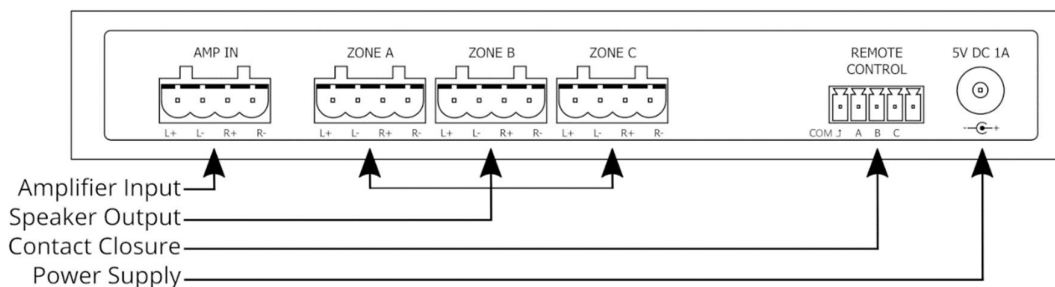

<b>Description</b>	3 Way Smart Speaker Switch
<b>Model Number</b>	3S-3Z
<b>UPC / EAN-13</b>	5060739700010
<b>Product Dimensions, Weight</b>	H38 x W216 x D100 mm, 293g
<b>Boxed Dimensions, Weight</b>	H90 x W355 x D127 mm, 704g
<b>Includes</b>	Power Supply, Connection Plugs, Cable Ties, Quick Start Guide
<b>Outer Box</b>	12pcs, H275 x W565 x D375 mm, 9.5kg
<b>Power Input</b>	5V DC 1A, 2.1 x 5.5mm Barrel Plug, Centre Positive
<b>Power Supply</b>	100-240V 50/60Hz, 1.8m Lead, UK/EU/USA/AUS Plugs
<b>Switching Relays</b>	Max 8A @ 250V AC
<b>Amplifier Power</b>	Max 300W @ 8Ω
<b>Cable Connection</b>	Max 2.5mm <sup>2</sup> or 14AWG
<b>Speaker System Design</b>	Impedance Matching, Zone A in Parallel with (Zone B+C Series)
<b>All Zones Off</b>	Amplifier Protection 200Ω Dummy Load
<b>Wi-Fi Support</b>	2.4GHz 802.11b/g/n, WPA/WPA2 PSK
<b>Supported OS (Provisioning)</b>	Android 6.0+ (Google Play Store) / Apple iOS 11.0+ (App Store)