



HS-01


HEADPHONES WIRELESS

USER MANUAL

www.origem.com

Wireless Stereo Headset

USER MANUAL

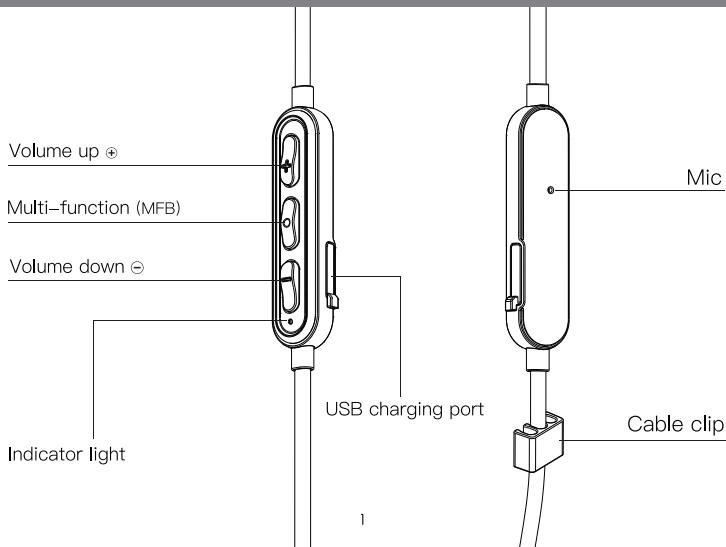

Wireless Stereo Headset

Origem HS-01 USER MANUAL (CSR8645)

Basic Parameters:

- 1) Total Length: 62cm
- 2) Weight: Appro.18g
- 3) Charging Port: Micro USB
- 4) Control Button: Three Buttons (MFB, Volume +/Next Song, Volume -/Previous Song)
- 5) Battery: Rechargeable lithium polymer battery 3.7V; (70*2) mAh
- 6) Standby Time: Appro. 300 hours
- 7) Talk Time: Appro. 12 hours
- 8) Music Time: Appro. 10 hours
- 9) Charging Time: Appro. 30 minutes
- 10) Frequency: 20Hz~20KHz
- 10) Operating Temperature: -10~50℃
- 11) Storage Temperature: -20~80℃

Bluetooth Parameters:

- 1) Version: Ver. 4.1
- 2) Support Protocols: HSP、HFP、A2DP、AVRCP、APTX
- 3) Pairing Name: Origem Mix
- 4) Code: None
- 5) Transmit Power: Class II I(-6dBm~+4dBm)
- 6) Receive Sensitivity: -92dBm
- 7) Frequency: 2.40GHz~2.48GHz
- 8) Distance: 10 meters

First Step: To ensure best battery performance, it is recommended to charge the headset fully before first use.

Turn On/Off

- 1) Turn On: Keep pressing Multi-function button for 2 seconds, blue light flashing. You will hear the audio message "Power On"
- 2) Turn Off: Keep pressing Multi-function button for 4 seconds, blue light flashing. You will hear the audio message "Power Off"

Pairing

- 1) Keep pressing Multi-function button for 2 seconds to turn on the headset, blue light flashing. You will hear the audio message “Power On”
- 2) Turn on Bluetooth on your device, search and add new device. Select “Origem Mix” from the list and pair it
- 3) Once the headset is successfully connected, you will hear the audio message “Your device is connected”
- 4) Disconnect and Reconnect: Disconnect from the headset, it will automatically connect the device. Disconnect from the device, reconnect the headset on Bluetooth list

Additional Pairing Notes

- 1) The headset will automatically turn off if not paired within 8 minutes
- 2) If you cannot search the headset, please make sure Bluetooth function is on. If it is still now working, please turn off the headset, then keep pressing Multi-function button until “Origem Mix” shows on Bluetooth list

Multipoint Connection

Origem HS-01 is capable of connecting with 2 devices at the same time, enabling you to use the headset with both devices simultaneously

- a. Pair the headset according to “Pairing”
- b. Disconnect the connection on the first device. The headset will enter the pairing mode
- c. Pair the headset with the second device according “Pairing”
- d. Connect the headset on your first device
- e. Multipoint connection completed
- f. If you want to play music of another phone, just pause the music and it will switch to another phone automatically

Phone Call

- 1) Answering Call: A phone call is coming, briefly push Multi-function button and you will hear Beep audio message
- 2) Refusing Call: A phone call is coming, press Multi-function button for 3 seconds and you will hear Beep audio message
- 3) Ending Call: Briefly push Multi-function button and you will hear Beep audio message

- 4) Volume: In phone call or music, press Volume +/- to adjust volume. You will hear audio message when it reaches max/min volume
- 5) Last Number Redial: To redial the last number you called, double click Multi-function button
- 6) Voice Dialing (your phone should support this feature): In standby mode, press “+” or “-“for 3 seconds and you will hear audio message

Play Music

- 1) Play Music: Briefly push Multi-function button to play music on your device
- 2) Pause: Briefly push Multi-function button
- 3) Volume: Briefly press “+”to increase volume, “-“to decrease volume
- 4) Previous Song: Press Volume - for 2 seconds
- 5) Next Song: Press Volume + for 2 seconds

Battery Status Notification

When the battery power is low, you will hear the audio message “Battery Low”, red light flashing. On IOS and some newer Android devices, it will display the battery level at Status Bar of your device.

Phone Call of Multipoint Connection (your phone should support this feature)

While on a call of the first phone, the second phone has an incoming call, press Multi-function button for 2 seconds to refuse the call of second phone. By press “+” and “-” simultaneously, to switch the phone calls between two phones. Briefly press Multi-function button to end current call and automatically switch to the call of another phone

LED Status

- 1) Turn On: Blue Light
- 2) Turn Off: Blue Light
- 3) Pairing: Red and blue light flashing alternately
- 4) Standby Mode(Connected): Blue light flash every 10 seconds
- 5) Incoming Call: Blue light flash every 10 seconds
- 6) Dialing: Blue light flash every 5 seconds
- 7) On a call: Blue light flash every 10 seconds
- 8) Playing Music: Blue light flash every 10 seconds

- 9) Charging: Red Light
- 10) Charging Complete: No light
- 11) Low Battery: Audio message “Battery Low” every 5 minutes, and red light flashes.

Customer Service Email : support@origem.com

NEED MORE HELP ?

For all supprt go to origem.com

