
Lisse Wall Light Installation Instructions

Lisse Wal	l Light Installatio	n Instructions					
		Product Specificatio	ns				
Model No.	HV3643T-BLK-240V	HV3643T-WHT-240V	HV3644T-BLK-240V	HV3644T-WHT-240V			
Name	Lisse						
Material	Aluminium						
Colour	Black	White	Black	White			
IP Rating	IP54						
Input Voltage	240v AC						
Lamp Base	Built in LED						
Lamp Wattage	1х бw		2x	2x 5w			
Colour Temp	TRI Colour - 3000k, 4000k, 5500k		TRI Colour - 3000k, 4000k, 5500k				
Lumens	360lm, 375lm, 390lm		2x 300lm, 2x 310lm, 2x 325lm				
CRI	> 80						
Wiring	Parallel						
Dimmable	No						
Warranty	2 Years Replacement*						

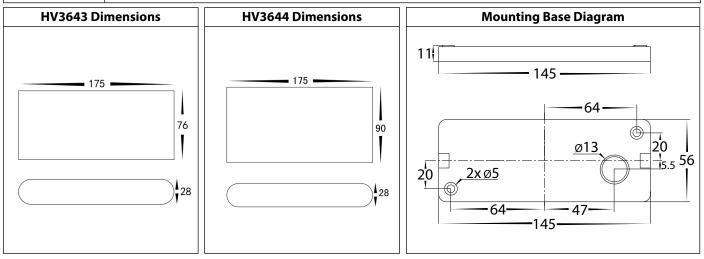

Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- . Ensure all electrical mains are disconnected before any installation.
- Modification of this product will void any warranty. •
- Havit Lighting does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system. •
- When installing low voltage fittings, Voltage to fitting must be within +or- 5% of voltage required, if not within this allowance warranty will be voided. .
- Aluminium and 304SS fittings must not be installed within 2km of any salt water environments. •
- . When installing copper fittings, gloves must be worn to avoid any oils transferring to fitting.
- All 316 & 304 stainless steel fittings must have regular cleaning maintenance to avoid any tea staining from forming on fitting. (Warranty does not cover Tea Staining)
- All o-rings and seals must be in place correctly to maintain warranty
- . This form may be updated at any time due to product improvements, please check online installation form for most current version.

Steps for Installation:

- 1. Make sure that the electrical circuit is free of voltage (master switch off)
- 2. Loosen allen screws on side of fitting
- Remove base plate from fitting and attach base plate in desired location 3.
- 4. Connect the cable - use wire with earth; connect the earth first, then live and neutral wire
- 5. Fitting is preset to 3000k, to change slide switch to desired colour temperature
- б. Reattach fitting to baseplate making sure screws are tight to avoid water penetration.
- 7. Apply silicon around edge of fitting to prevent any water from getting inside to electrical connections.
- 8. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

Must be installed by a licensed electrician

Contact Details:		Warranty Terms & Conditions*	Additional Information			
143 Beauchamp Road Matraville NSW 2036 Australia	Tel: 02 9381 8300 Fax: 02 9666 8881 Email: sales@havit.com.au Web: www.havit.com.au				Санарана Караларана Нузваятель	