



# PORTABLE PA SPEAKER

## User Manual



**SPA8**

## Introduction

Thank you for purchasing our SPA-8 Portable PA Speaker System, and welcome to the LyxPro™ family. This user manual is meant to offer you a brief walkthrough of the device's features and usage protocols. We hope you find this manual helpful. For additional information and technical support, please feel encouraged to contact our help team at [info@lyxpro.com](mailto:info@lyxpro.com).

## Important Safety Instructions

- 1 Installation and/or repair of the speaker cabinet must be carried out by qualified personnel following approved safety standards.
- 2 Do not attempt to clean plastic enclosure with solvents or petrochemical-based cleaners.
- 3 Do not place lighting equipment, smoke machines or other heat-source objects on speaker cabinet.
- 4 Do not place speaker cabinet in water or expose to direct rain. Risk of hazardous short circuit.
- 5 Do not stack speaker cabinet in a manner that could cause injury should a cabinet become dislodged.
- 6 Before installation, ensure that voltage and frequency of power outlet match power requirements of loudspeaker.
- 7 Make connections to loudspeaker first, before connecting to main power.
- 8 Ensure that power cord is never crimped or damaged by sharp edges. Never let power cord come into contact with other cables. Only handle power cord by the plug.
- 9 In case a fuse replacement is needed, be sure to use one of identical rate and dimensions.



This icon on product or packaging indicates that product shall not be treated as household waste. Instead, it shall be dealt with in accordance with regulations of recycling electrical and electronic equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences to the environment and to human health, which could otherwise be caused by inappropriate waste handling of this product. The recycling of materials will help conserve natural resources. For more detailed information about recycling of this product, please contact your local city office, your household waste disposal service or the shop where you purchased the product.

## Features


- 100 Crystal-Clear Watts On Demand
- Ultra-Compactness & Light 14-Pound Weight
- Bluetooth, SD Card Slot & USB Input
- Onboard, Intuitive Music Controls
- XLR & 1/4" Inputs with Mic/Line Switch
- R/L (Red/White) RCA Auxiliary Input
- Independent Level Knobs Per Input
- Basic EQ Knobs for Mp3 Section
- Internal Switch-Mode Power Supply
- Tripod Mounting Hole w/Tightening Screw

## Box Contents

- 1x SPA-8 Portable PA System
- 1x Power Cord
- 1x User Manual

## Parts & Controls

1. Mp3/WMA Player w/Bluetooth
  - a. Mode Button: Switches between USB/SD Card Reader
  - b. Pause/Play Button
  - c. Repeat Button
  - d. Previous Button
  - e. Next Button
2. Volume 1: Controls Mic Input Level
3. 1/4" Mic Input Jack
4. Line/Mic Input Switch
5. XLR Mic Input Jack
6. Volume 2: Controls Line Input Level
7. Balanced RCA Input
8. R/L (Red/White) RCA Line Input
9. XLR Line Out to Another Active Speaker
10. Volume Clipping Indicator
11. Treble Knob: Controls tone level of high frequency at range -12dB to +12dB
12. Bass Knob: Controls tone level of low frequency at range -12dB to +12dB
13. MP3 Volume Knob: Controls volume of MP3 player
14. Power On/Off Switch
15. Power Input

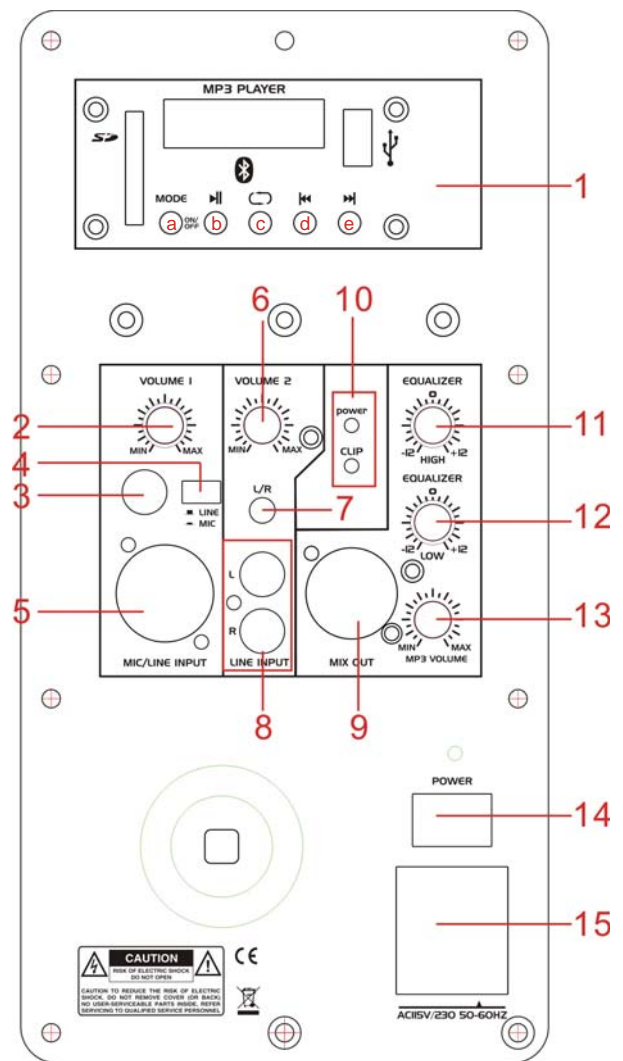

## Connecting to Bluetooth

- Switch Power On/Off Switch (#14) to On position.
- Long-press Mode Button (#1a). Display will read "Blue".
- Turn on Bluetooth function on mobile device you wish to connect.
- When "LYXPRO" appears on your mobile device, select it.
- Short beep will sound. Devices are now connected.

## Technical Specifications

Speaker Type:	Active
Frequency Response:	40Hz-19KHz
Power Output:	100W
Maximum Sound Pressure Level (SPL):	106dB
Nominal Sensitivity:	91dB
Impedance:	4ohm
Low Frequency Driver:	8" Woofer 30oz. 1.5"VC 4 ohm
High Frequency Driver:	1" Ti. Diap 8ohm
Enclosure Material:	Plastic
Input Connections:	XLR/1/4 " Mic Input + 2 RCA Line Input
Dimensions:	17.1" x 11.6" x 0.96"
Weight:	14.7 Pounds

www.lyxpro.com  
 Distributed by  
 C&A Marketing, Inc.  
 2 Bergen Turnpike  
 Ridgefield Park, NJ 07660  
 info@lyxpro.com

**MADE IN CHINA**  
 LyxPro is a trademark of  
 C&A IP Holdings, LLC  
 ©2015 All Rights Reserved