





























**Features** 

**Triple Proof Light** 

Stainless Steel Housing Series

## LONGLUX




**Dimension** 





**IP Rating** 

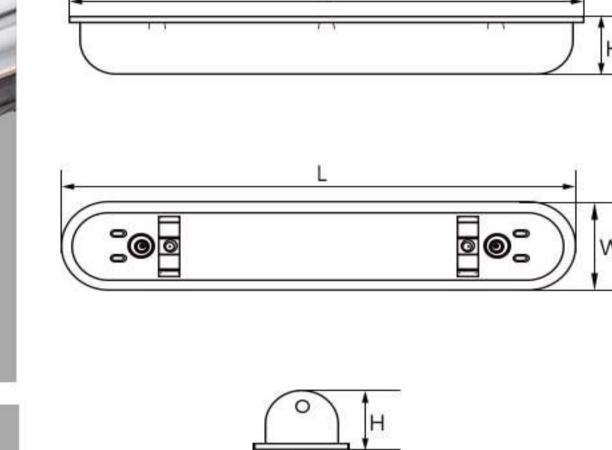

with the help of a shell

➤ Sealing: silicone rubber


➤ Lock: stainless steel

➤ Base: stainless steel 304, can upgrade to 316

➤ Cover: toughened glass, it's fixed to the body

➤ Installation: installation individually. Mounting

on the mounting surface with hangers



**Product Size** 

(L\*W\*H) (MM)

M4 fixing srews

Base

## Model No.

Watt(W)

**Specification Sheet** 

LLX-TriProof-SS-118	1*18	IP65	2.8	3.0	700*140*90	Chaimlean sharl	
					700"140"90	Stainless steel	toughened glass
LLX-TriProof-SS-218	2*18	IP65	3.5	3.8	700*190*90	Stainless steel	toughened glass
LLX-TriProof-SS-136	1*36	IP65	4.7	5.0	1300*140*90	Stainless steel	toughened glass
LLX-TriProof-SS-236	2*36	IP65	6.0	6.8	1300*190*90	Stainless steel	toughened glass
LLX-TriProof-SS-158	1*58	IP65	6.0	6.4	1600*140*90	Stainless steel	toughened glass
LLX-TriProof-SS-258	2*58	IP65	7.0	8.1	1600*190*90	Stainless steel	toughened glass

G.W.

(Kg/Ctn)

N.W

(Kg/Ctn)

**Triple Proof Light** 


Stainless Steel Housing Series

M4 fixing srews


**Install Instructions** 

LONGLUX

Cover

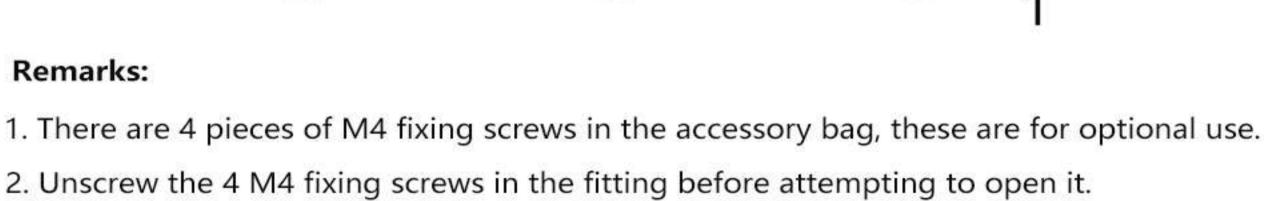

- 3. Tighten the 4 M4 fixing screws back into place after wiring the fitting. The gear tray and the glass have been removed

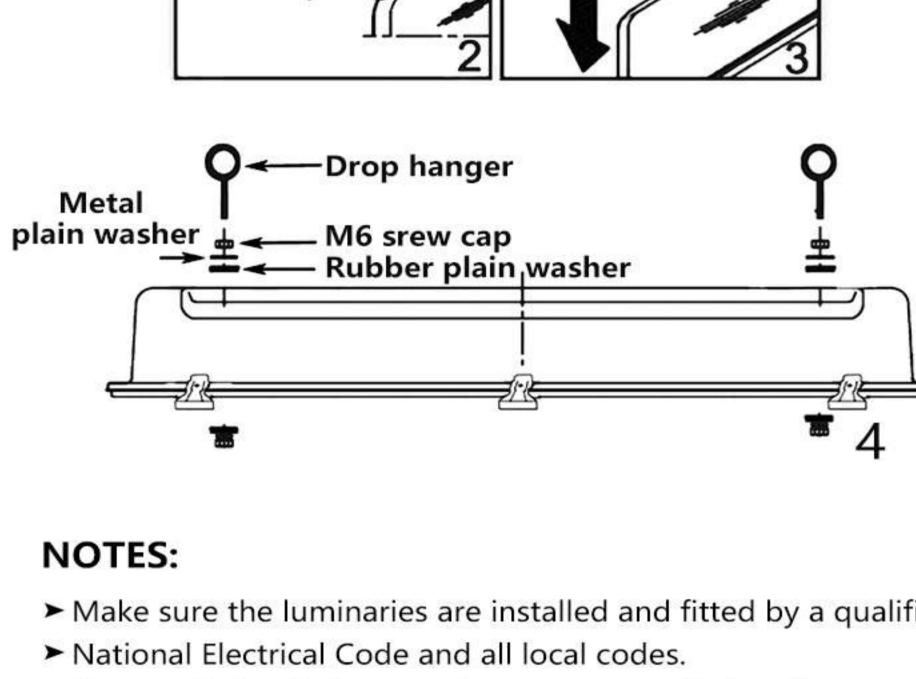

# 6 ➤ Make sure the luminaries are installed and fitted by a qualified electrician ensuring the installation complies to the current. ➤ Ensure all electrical connections are secure & that there are no loose strands.

## ➤ This is a Class I product and must be earthed.

➤ Make sure that the fixings are adequate to support the weight of the fitting. ➤ Before installation or maintenance, turn off electric power and allow the fitting to be cool.

black(or brown)line —— connect live wire

Model No.

LLX-TriProof-SS-118

LLX-TriProof-SS-218

LLX-TriProof-SS-136

white(or blue)line ---- connect neutral wire green(or yellow-green)line —— connect earth wire

WIRING INSTRUCTION OF MAIN CABLE:

# PROPERTY DAMAGE, FIRE AND DEATH

Power (W)

1\*18(W)

2\*18(W)

1\*36(W)

▲ WARNING:

LONGLUX

G.W.

(Kg/Ctn)

3.0

3.8

5.0

N.W

(Kg/Ctn)

2.8

3.5

4.7

Carton Dim

(L\*W\*H) (MM)

750\*195\*145

750\*245\*145

1350\*195\*145

The product must be grounded and installed in accordance


Failure to do so may increase the RISH OF PERSONAL INJURY,

with the National Electrical Code and all local codes

## PACKAGING DATA 1PCS/CTN

Stainless Steel Housing Series

**Triple Proof Light** 

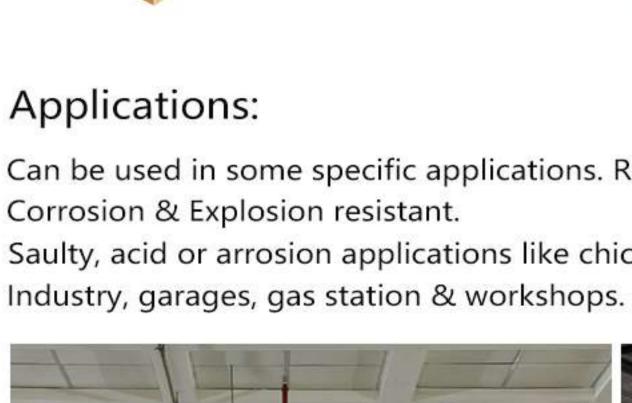

	LLX-TriProof-SS-236	2*36(W)	1	6.0	6.8	1350*245*145					
	LLX-TriProof-SS-158	1*58(W)	1	6.0	6.4	1650*195*145					
	LLX-TriProof-SS-258	2*58(W)	1	7.0	8.1	1650*245*145					
Reliability and durability, High mechanical strength,											
ic s.	ken farm, ship, harbo	r, chemical fact	tory or beac	h projects							
48					1						

Q'ty/Ctn

Industry, garages, gas station & workshops.



AFTER-SALE SERVICE LONGLUX warrants this LONGLUX-branded hardware product against defects in materials and workmanship under normal use for a period of FIVE(5) YEARS from the date of purchase.LONGLUX

\*Damage by thunder stroke over 4KV(L,N to FG)/4KV(L to N) will not covered by warranty based on IEC6100-4-5.

