



**IMUNSEN TOWER**  
AIR PURIFIER MANUAL



**INNOVATION FOR EVERYDAY LIFE™**

# TABLE OF CONTENTS

## ***DEAR CUSTOMERS,***

Thank you for purchasing the Bemis Imunsen Tower Air Purifier.  
Please read carefully through the user manual for safe and proper use.  
This manual also contains warranty details.

### **4 CAUTIONS**

Cautions

### **6-7 PRODUCT INTRODUCTION**

Product Parts  
Product Diagram

### **8-15 USER GUIDE**

Connecting the Purifier  
Diffuser Oil Capsule (Optional)  
Placing the Purifier  
Functionality

### **16-23 MAINTENANCE**

Cleaning Filter & Filter Storage  
Cleaning Dust Sensor  
How to use the APP (Android & IOS) (SMART TOWER ONLY)

### **24-29 SPECIFICATIONS**

Product Functions  
FAQ  
Warranty



# CAUTIONS

## TRANSPORTATION

When transporting the product, please make sure the device is turned off and unplugged.

## INSTALLATION

Insert the filter cover properly before usage. Make sure the air purifier is at least 4 inches away from the wall.

## POWER CORD

Severe pressure or bending the power cord could cause damage. Do not use inadequate or non-certified power adaptors. Do not temporarily replace the power cord with inadequate or non-certified power adaptors. Do not pull the power cord with force when unplugging. User must hold the head of the power cord when connecting. When transporting or cleaning the device, please make sure to turn the power off and unplug the product beforehand.

## IN USAGE

Immediately stop the purifier if it behaves oddly. Do not cover the air inlet area.


## REGULATIONS

Do not use the purifier in humid locations.






# PRODUCT PARTS

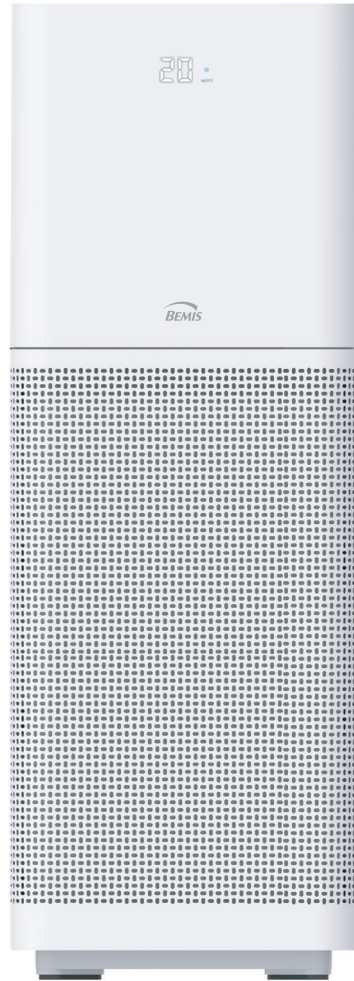


Device Body

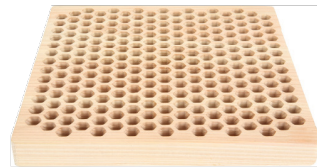


Maple Wood Panel



Diffuser  
(Optional Detaching Hook)



Protective Cover

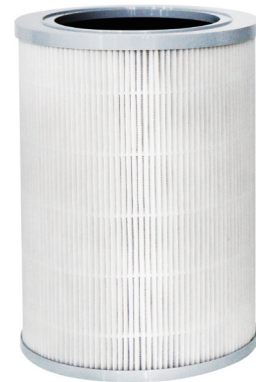

HEPA 13 Filter



Power Cord

# PRODUCT DIAGRAM

Air Quality  
LED Display

Air Inlet  
(3 Sides)

Additional  
Air Inlet



FRONT

Humidity Sensor  
PM 2.5 Dust Sensor


Filter Storage Cover

Power Port  
Base




BACK

## CONNECTING THE PURIFIER

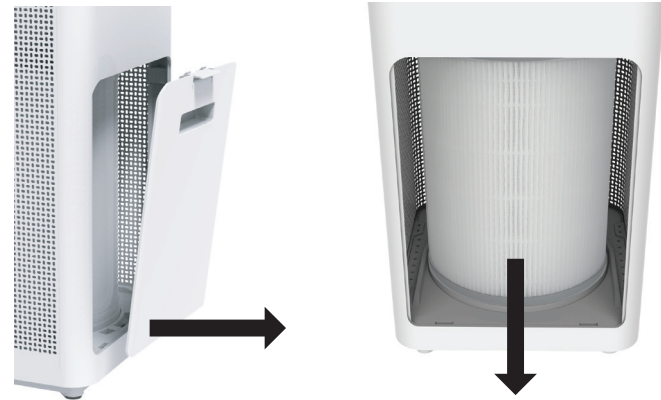


1. Open the filter cover situated at the back of the product.
2. Press down and pull the filter out.

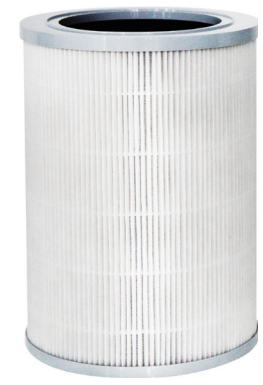

3. Remove filter packaging.
4. Place the filter back into the product.

## CONNECTING THE PURIFIER

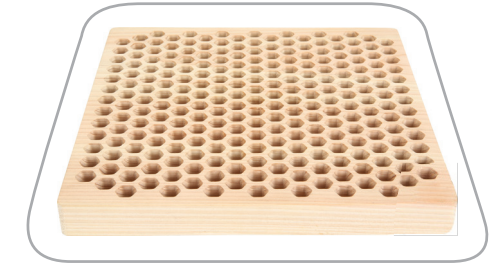


5. Unpack the maple wood panel.



6. Connect the power cable to the plug situated at the back of the purifier.

 Do not touch with wet hands

## DIFFUSER OIL CAPSULE (OPTIONAL)




1. Use the hook accessory to remove the maple wood panel.



2. Remove the safety net with a screwdriver.




3. Remove the capsule cover from the blower fan case, then peel off the top foil.  
Do not poke the clear protective film that contains the essential oil.  
Available oil scents come in lavender and eucalyptus.



Remove capsule cover



Remove top foil




Reassemble capsule cover



4. Reassemble the maple wood panel. The purifier is ready to be used.  
The purifier does not operate when the filter cover is open, so please properly attach the filter before turning on the device.

## PLACING THE PURIFIER

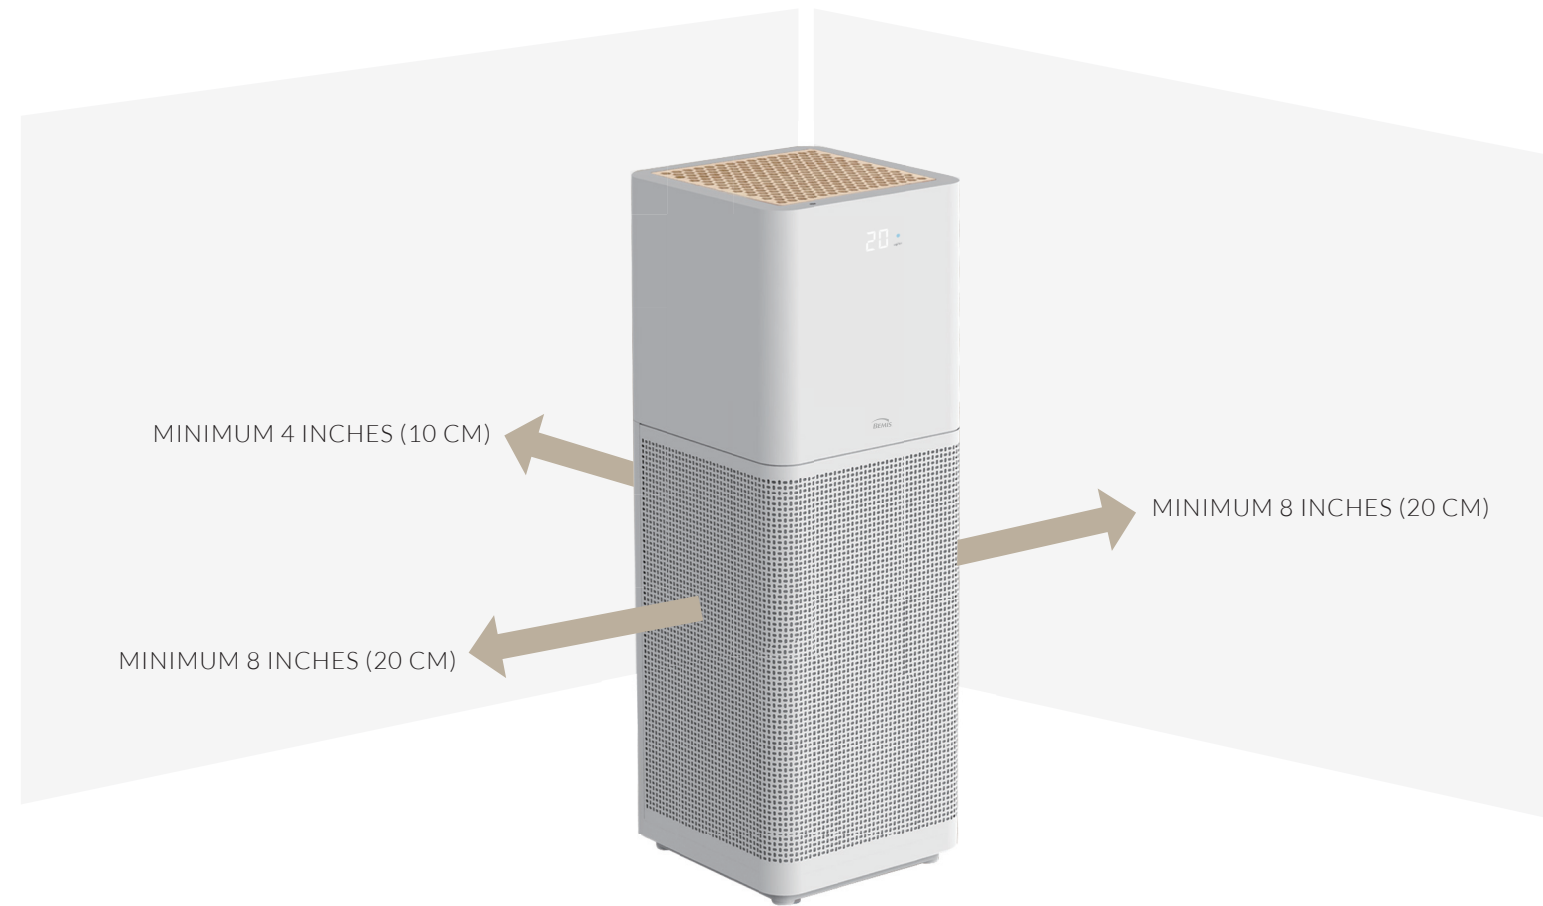

Maintain the above indicated distances from other objects/walls when using the purifier. To use the purifier to its full potential, please make sure it is placed at over 4 inches away from the wall. Place the provided transparent cover on top when not using.

## FUNCTIONALITY

### FILTER REMINDER

When you turn on the power, the time before filter replacement is shown on the screen.

Check whether the filter storage cover is properly placed.

### ADDITIONAL INDICATOR

**CAUTION:** After replacing the filter, turn off the power and push the Auto button and Cyclone button at the same time to reset the filter replacement time.



#### PRE-FILTER

Removes larger obstacles such as hair, pollen, pet fur and dander.



#### H13 TRUE HEPA FILTER

H13 True HEPA Filter removes 99.97% of fine dust.



#### DEODORIZATION FILTER

Eliminates VOC caused by daily movement, harmful gases, and pet odors.



#### MAPLE WOOD PANEL

Natural odor neutralization and aromatherapy.

## FUNCTIONALITY

### AIR QUALITY DISPLAY IN NUMBERS & COLORS

Air Quality Display



0~30  
Good (Green)



31~80  
Average (Blue)



81~150  
Bad (Orange)


PM 2.5

20

ug/m<sup>3</sup>





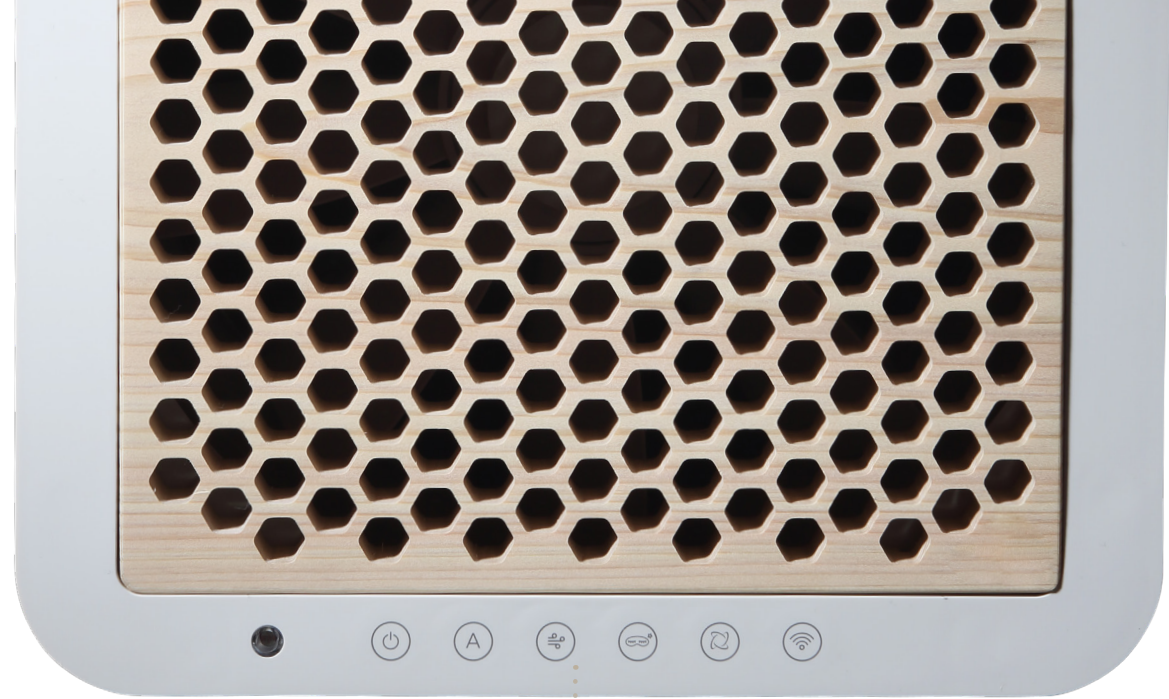









## SMART FUNCTIONS

-   
 Ambient light sensor
-   
 Power
-   
 Auto
-   
 Wind Level (3 levels)
-   
 Sleep Mode
-   
 Cyclone
-   
 Optional Power Saving
-   
 Optional Wifi

## FUNCTIONALITY

- 
**POWER**  
 Turns the power on and off. Night mode and power save mode recommended for night usage.
- 
**AUTO**  
 Automatically changes function levels according to the air quality, using the 2.5pm dust sensor situated at the back of the purifier.
- 
**WIND POWER (3 LEVELS)**  
 Operates when manually set. Operates under 3 different modes (low-moderate-strong) set by the user.
- 
**SLEEP MODE**  
 Operated automatically during night time. The fan speed automatically reduces, making less noise and using minimum energy. Sleep mode is unavailable when the lights are turned on.
- 
**OPTIONAL WIFI (SMART TOWER ONLY)**  
 Product can be controlled and monitored via mobile app if set up.
- 
**CYCLONE**  
 Purify the air efficiently with full power. Most efficient when used while cleaning, or after cooking. Automatically transits to auto mode after 20 minutes of operating under cyclone mode.
- 
**OPTIONAL POWER SAVE**  
 Converts to the power save mode. The wind speed decreases to reduce power consumption.
- 
**AMBIENT LIGHT SENSOR**  
 Automatically changes mode based on the brightness of the room. Automatically activates sleep mode when in dark areas, and returns to auto mode once the area brightens up.




## CIRCULAR FILTER & CLEANING FILTER STORAGE



If the device has been in usage for 400 hours, it will automatically alarm to clean the filter storage area. Please clean the filter storage area when notified to maintain the product at good condition.

When the air purifier is not in use, place the provided cover on top of the maple wood panel to prevent dust from entering.


**WARNING:** Please do not use water to clean the circular filter.

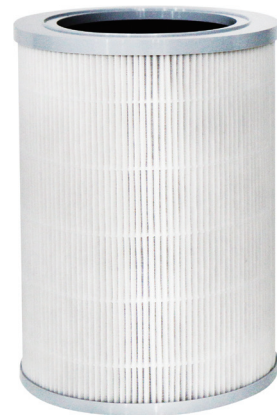

\*Filter is recommended to be replaced every year.

MAINTENANCE

## CLEANING THE DUST SENSOR

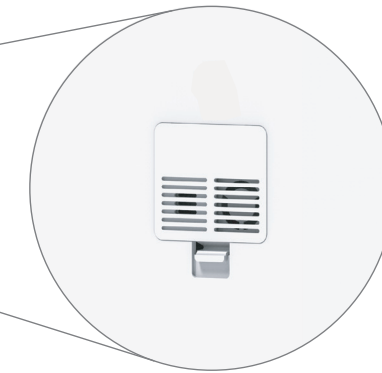


- Cleaning once every 3 months is recommended. If the sensor lens is not cleaned, it could cause miscalculations.
- Please open the sensor cover, then use a compressor or wind power to clean the inner part of the device.
- 

**WARNING:** Please do not use warm wind.  
Read and save these instructions.

MAINTENANCE


## HOW TO USE THE APP (ANDROID & IOS) (SMART TOWER ONLY)

### 1. Download the Bemis Air App

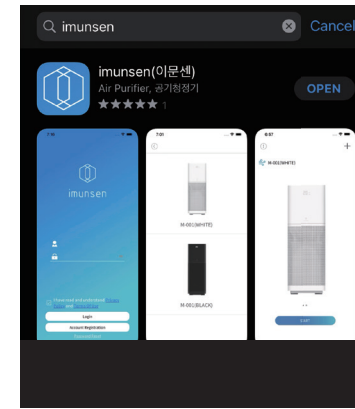

Search and download the Bemis Air App on the Google Play Store or Apple App Store

### 2. Account Registration

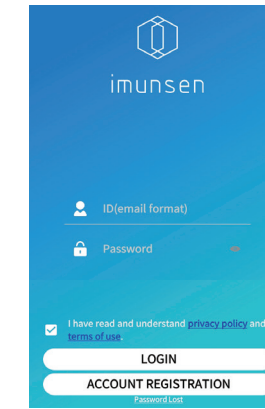

Launch the app and tap "Account Registration". Create an account with your email address. A confirmation email will be sent to your email address. Choose "Ativate Account" in the confirmation email to finish account registration.


### 3. Turn on the Wi-Fi Function from the Device



After registering your account and logging in, press the Wi-Fi button on the device.


# HOW TO USE THE APP (ANDROID & IOS) (SMART TOWER ONLY)

## 4. Device Registration

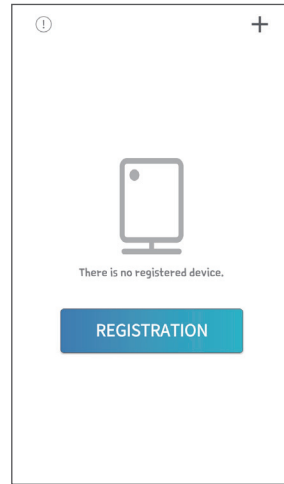


Press 'REGISTRATION' and turn on the Wi-Fi on your phone.

## 5. Choose the Device

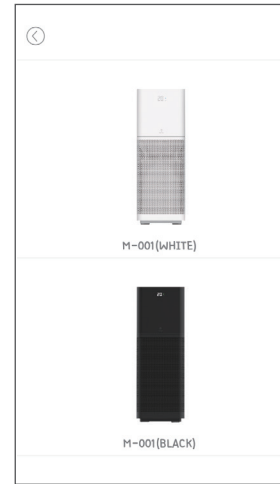

Choose the color of your device.

## 6. Wi-Fi Password

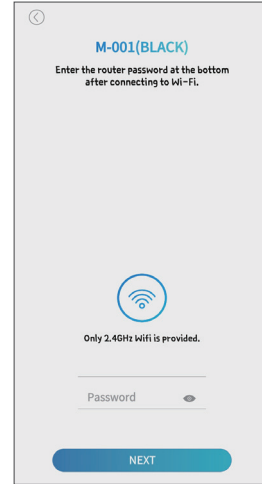

Type the password for your Wi-Fi.


# HOW TO USE THE APP (ANDROID & IOS) (SMART TOWER ONLY)

## 7a. Connect 'imuns' Wi-Fi (IOS)




The password is "Bemis"

## 7b. Connect 'imuns' Wi-Fi (Android)

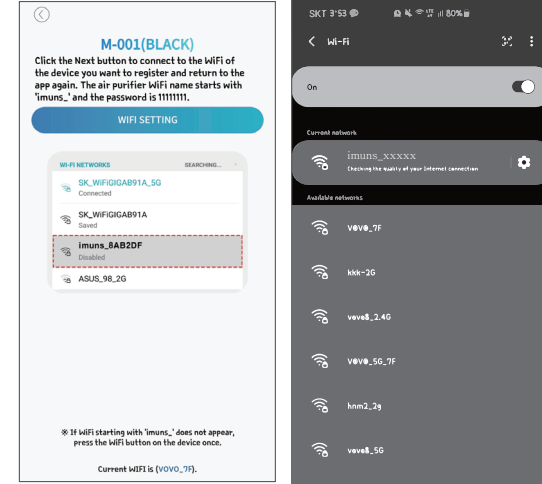

The password is "Bemis".  
Please connect imuns\_XXXXX.


## 8. Press Next on IOS

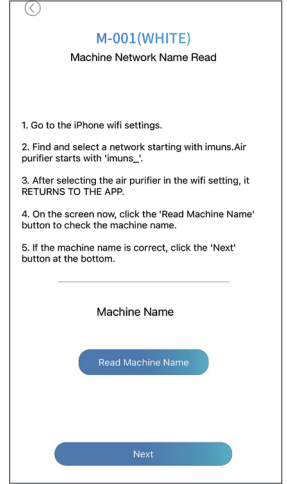


This will only appear on IOS. Press 'Next'.

# HOW TO USE THE APP (ANDROID & IOS) (SMART TOWER ONLY)

## 9. Registration Process

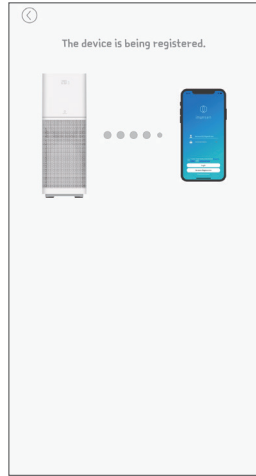

ANDROID

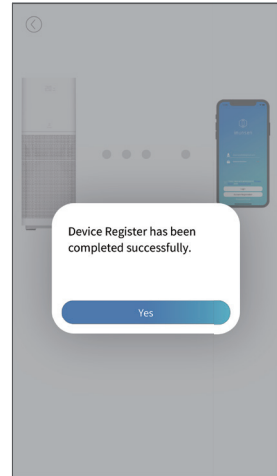

IOS

Registering the device is in process.


## 10. Registration Complete



When the device is successfully connected, please press 'START'.

## 11. How to Reset the Device

Initialization required when Wi-Fi is not connected.




1. Turn the power off (Keep the plug in the socket).
2. Press Wi-Fi button and Auto button at the same time and you will hear the beep.
3. Device reset completed.

\*(Each device can be connected to only one device at each time.)


# HOW TO USE THE APP (ANDROID & IOS) (SMART TOWER ONLY)

## Filter Usage

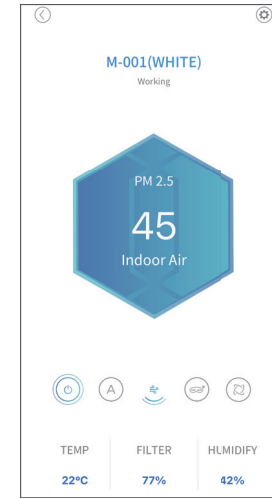


Press the 'FILTER' to check the information about your filter usage.

## Device Information

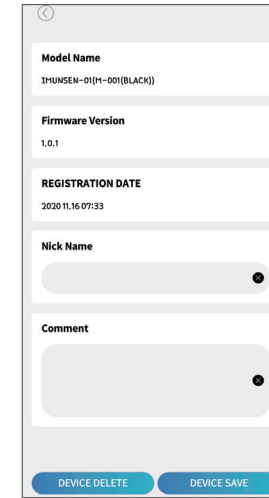

(If you want to connect the device to a different phone, you need to delete the device first and connect.)

## Filter Information

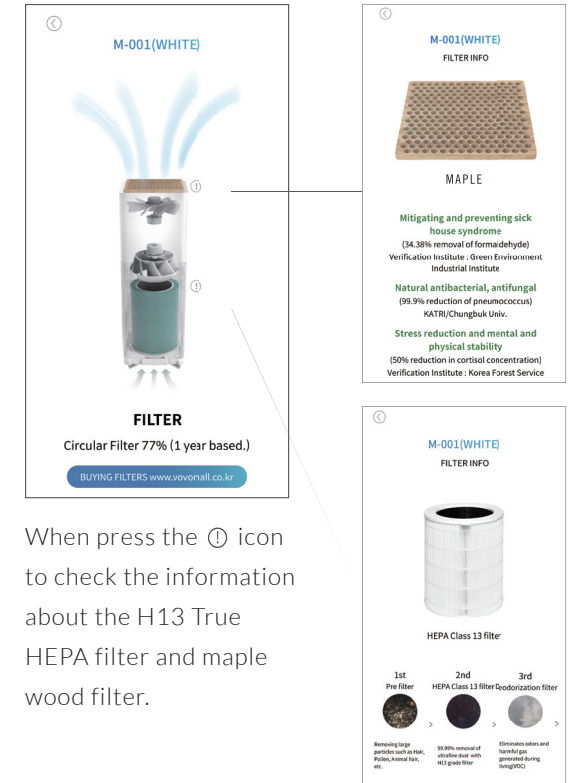

When press the ⓘ icon to check the information about the H13 True HEPA filter and maple wood filter.



# PRODUCT FUNCTIONS



PRODUCT NAME	Bemis Imunsen Tower
SIZE	10.2 x 10.2 x 28.3 Inches, 260x260x720mm
USABLE AREA	782 sq.ft, 59.5 m <sup>2</sup>
WEIGHT	19lb, 8kg (Filter Included)
VOLTAGE	100V~, 50/60 Hz, 120V~, 60 Hz, (220~240)V~, 50/60 Hz
POWER	4W - 72W
CABLE	AC : 5.9 ft, 1.8m
COLOR	White / Black
HEPA FILTER	Replacement Cycle: About 1 year
CERTIFICATION	ETL & FCC
COUNTRY OF ORIGIN	South Korea

## SPECIFICATIONS

# FAQ

ISSUES	CHECK POINTS	SOLUTIONS
--------	--------------	-----------

<ul style="list-style-type: none"> <li>The power does not turn on.</li> </ul>	<ul style="list-style-type: none"> <li>Is the power plug properly plugged in?</li> <li>Is the indicator light turned on?</li> </ul>	<ul style="list-style-type: none"> <li>Please give the device a minute after plugging in before turning the power on.</li> <li>Please connect the power plug.</li> </ul>
<ul style="list-style-type: none"> <li>Wind is not coming out.</li> <li>The wind power has weakened.</li> <li>The wind power does not change.</li> </ul>	<ul style="list-style-type: none"> <li>Did you remove the vinyl cover from the filter before using?</li> <li>Is the filter properly assembled?</li> <li>Is the filter dirty? (Contamination of the filter can cause decreased wind power)</li> <li>Is the current mode set to night mode?</li> </ul>	<ul style="list-style-type: none"> <li>There is a vinyl protective cover on the filter. Please remove it before using the purifier.</li> <li>Please check if the filter is properly assembled and clean the filter area</li> <li>Please change the operation mode.</li> </ul>
<ul style="list-style-type: none"> <li>The wind power automatically changes.</li> </ul>	<ul style="list-style-type: none"> <li>Please check if the mode is under auto mode.</li> </ul>	<ul style="list-style-type: none"> <li>(In AUTO mode, the wind power automatically changes based on the air quality)</li> </ul>

## SPECIFICATIONS

ISSUES

CHECK POINTS

SOLUTIONS

- The wind power is too strong.
  - Is the device currently set in cyclone mode?
  - (Cyclone mode operates at full capacity to clear the air during a short duration.)

---

- The air produced by the purifier smells.
  - Was the product used in areas with smoke or strong odors?
  - Was the product brought from another place?
  - The filter inhales odor. Thus can emit that odor temporarily, but will eventually disappear.
  - The previous location's odor may still remain.

---

- Filter replacement period?
  - Hepa filter approx. 1 year,
  - Please check the start date of the filter usage.

---

- The dust sensor is not operating under auto mode.
  - Is the sensor covered by a wall or an obstacle?
  - Did you clean the sensor?
  - Please check the placement guide for proper usage. (Page 11)
  - Please check maintenance guide for proper usage. (Page 19)

ISSUES

CHECK POINTS

SOLUTIONS

- The maple filter lost its scent.
  - The filter will properly function for 2 years regardless of the filter losing scent.
  - Please purchase the maple oil from our website and gently wipe the product for scented usage.
  - After a period of use, even if the scent is minimal, the effect of maple wood remains.

---

- The filter shape has changed.
  - The filter is sensitive to humidity (water)
  - For further details, please refer to page 23.

## WARRANTY

### WARRANTY

**2 years from  
date of purchase.**

1. Unauthorized repairs, misuse, collisions, inadvertent misuse, liquid inflows, modifications, disassembly, use of third party components, or destruction, or alternation of labels and device number anti counterfeiting markings.
2. Conditions after the warranty time is over.
3. Damage caused by misuse.

## WARRANTY

1. Please contact Bemis support with any warranty inquiries.
2. Even during the warranty period, repairs will be charged if:
  - If the warranty does not correctly display purchase date, nor the copy of the invoice.
  - Defect caused by customer's fault.
  - Defect caused by natural disasters such as fire, gas, electricity defect and more.
  - Defect caused by misplacement or assemble.
  - Cost for technician visit.
  - Cartridge, filter or accessory defect.
3. Please note that all parts removed for repair will be taken by our team.
4. This warranty will not be reissued.

**888.722.6488**

**AirPurifiers@Bemismfg.com**

**BemisAir.com**







Bemis Manufacturing Co.

300 Mill Street  
Sheboygan Falls, WI 53085

888.722.6488 | [AirPurifiers@Bemismfg.com](mailto:AirPurifiers@Bemismfg.com) | [BemisAir.com](http://BemisAir.com)

