




gltc.co.uk

Lulworth Bedside Table

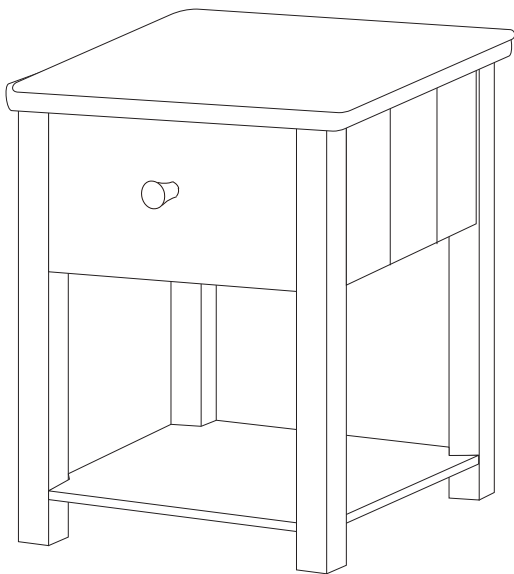

Thank you for shopping with GLTC, we hope you enjoy having this product in your home.

We know assembling furniture, toys or accessories is not everyone's favourite way to spend their time, so we've tried to make assembling this item as quick and painless as possible.

A few important pointers before you start:

- Please read the instructions right through before you start, and check that all the components have been included in the pack; we find separating all the hardware into piles makes it easier to be sure that everything is present and correct.
- Make sure you have the right tools. Allen keys are provided if required, but screw drivers and other tools are not. You'll find details of the tools you need at the beginning of the instructions.
- It's a good idea to build the unit in the room where you are going to be using it, to avoid the need to move it after it's been assembled.
- Do not throw away any packing materials until assembly is complete, just in case you accidentally discard smaller parts or hardware.

Assembly Difficulty



easy - medium - hard



one-person job

VI

29/06/2021

Safety Warnings:

- PLEASE RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.
- Adult assembly required.
- Unassembled product contains small parts which may present a choking hazard.
- Children should be kept away from the product during assembly to avoid any possible risk of injury.
- Assemble and use on a flat and level surface.
- DO NOT use power tools in the assembly of this product as there is a risk of over-tightening and consequently splitting of the wood.
- Check all fixtures and fittings regularly and tighten as necessary.

Customer Service:

- If you find that any components are missing or damaged, please do not begin assembly and do not use the item. Please contact GLTC Customer Services on **0344 848 6000** immediately.
- We do stock spare hardware packs at our warehouse, so we should be able to send you a replacement pack immediately if required.

Product Care:

- Wipe clean using a soft damp cloth followed by a dry cloth.
- Do NOT use cleaning products which contain ammonia, solvents or abrasive material.
- Do NOT expose the item to extremes of heat and humidity.
- Regularly check all fastenings, fixtures and fittings to ensure that they properly tightened.











Could we do better?

If there is anything you think could be improved in these instructions or in the assembly of this product we'd be grateful if you could let us know; we'll pass any helpful hints and tips on to other customers via our website and update the instructions.






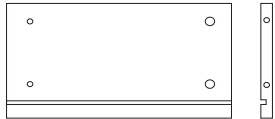





All you need to do is drop us a line at [**instructions@gltc.co.uk**](mailto:instructions@gltc.co.uk)


Thank you

Component Check List

<p>A</p>  <p>1x Top Panel</p>	<p>B</p>  <p>1x Side Panel</p>
<p>C</p>  <p>1x Side Panel</p>	<p>D</p>  <p>1x Shelf Panel</p>
<p>E</p>  <p>1x Back Panel</p>	<p>F</p>  <p>1x Drawer Side Panel</p>
<p>G</p>  <p>1x Drawer Side Panel</p>	<p>H</p>  <p>1x Drawer Front Panel</p>
<p>I</p>  <p>1x Drawer Base Panel</p>	<p>J</p>  <p>1x Drawer Back Panel</p>

Component Check List

<p>#1</p>  <p>18x Cam Dowels</p>	<p>#2</p>  <p>18x Cam Locks</p>
<p>#3</p>  <p>1x LH Flat Runner</p>	<p>#4</p>  <p>1x RH Flat Runner</p>
<p>#5</p>  <p>1x L-Shaped Runner</p>	<p>#6</p>  <p>1x L-Shaped Runner</p>
<p>#7</p>  <p>12x Screw (12mm)</p>	<p>#8</p>  <p>1x Handle</p>
<p>#9</p>  <p>1x Flat-ended Screw</p>	<p>#10</p>  <p>4x Screw (25mm)</p>
<p>You will need (not supplied)</p>  <p>Philips Head Screwdriver</p>	

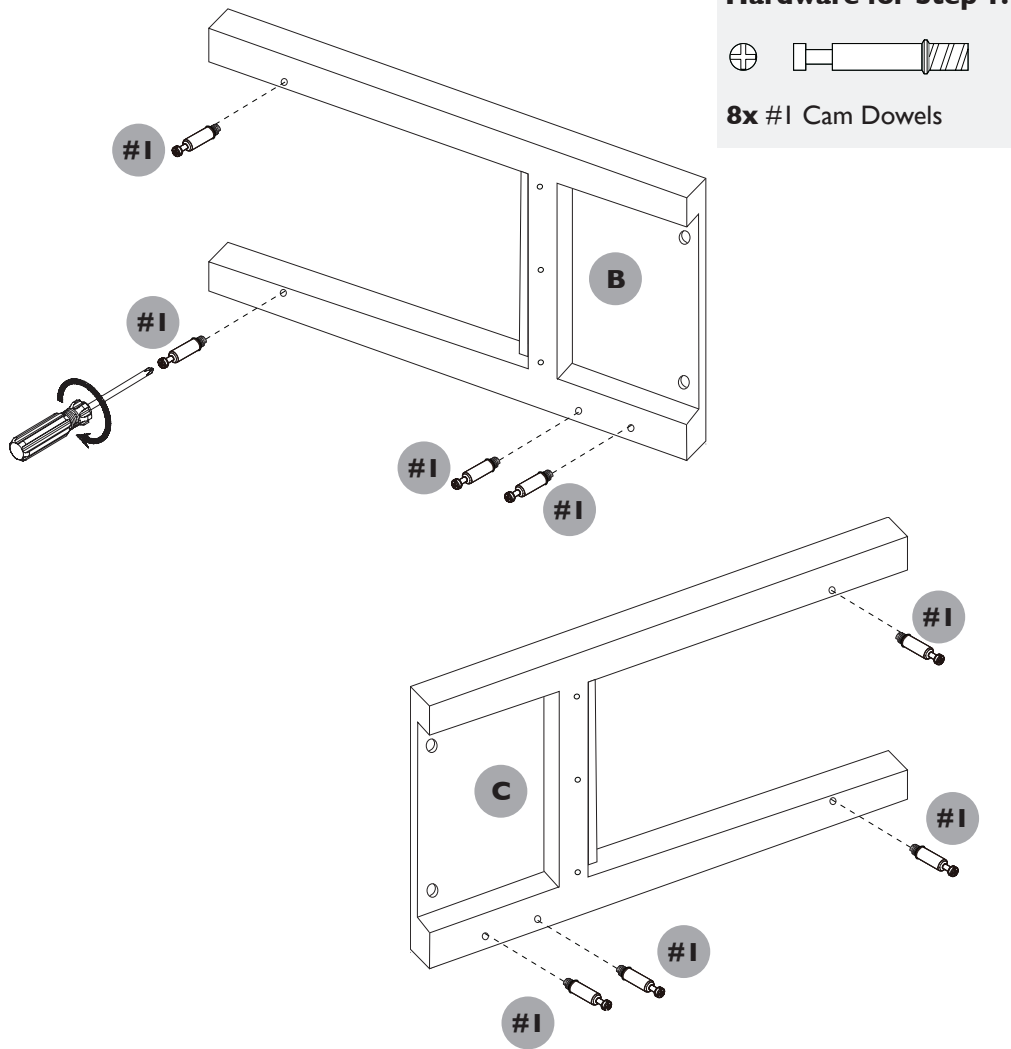

STEP 1:

Working on a protective surface such as a rug or carpet, take both side panels (B & C) and using a phillips screwdriver insert 4x cam dowels (#1) into the holes shown on EACH panel.



STEP 2:

Take side panel (B) and attach flat runner (#4) to the panel using 3x screws (#7).

Note: Position the runner with the wheel at the front of the panel (away from the hardware) and with the wheel closest to the legs. Align the holes on the runner shown in the close up with the drill holes in the panel. When fixed, the runner will be set back from the front edge of the panel.

REPEAT step using flat runner (#3) and side panel (C).

Ensure the screws are fully inserted for smooth drawer operation.

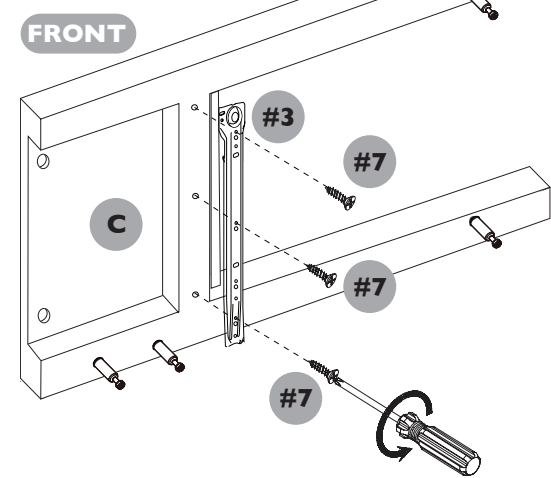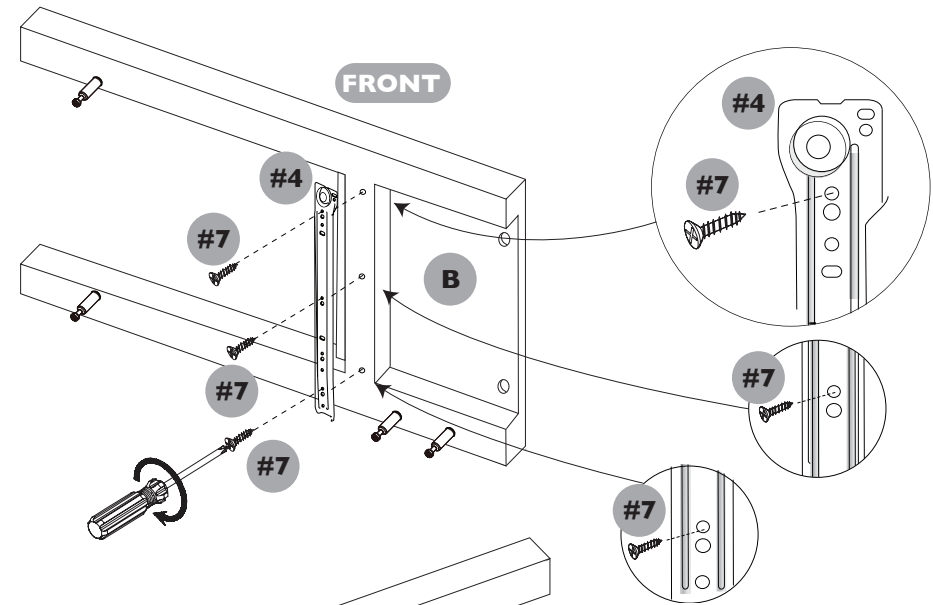

Hardware for Step 2:



1x #3 LH Flat Runner



1x #4 RH Flat Runner



6x #7 Screw (12mm)

STEP 3:

Take side panel (B) and orientate so it is on its side as shown.

Take shelf panel (D) and push the cut out corners of the panel over the cam dowel hardware on the legs. Ensure the large drill holes on the shelf panel are facing outwards to what will be the floor.

Insert 2x cam locks (#2) into the large drill holes and turn clockwise to lock.


Now take back panel (E) and orientate so that the drill holes on the long edge are facing up/outward and all the large drill holes are facing you/inside. Push panel (E) onto the top section of side panel (B) as shown.

Insert 2x cam locks (#2) into the large drill holes and turn clockwise to lock.

Hardware for Step 3:



4x #2 Cam Locks

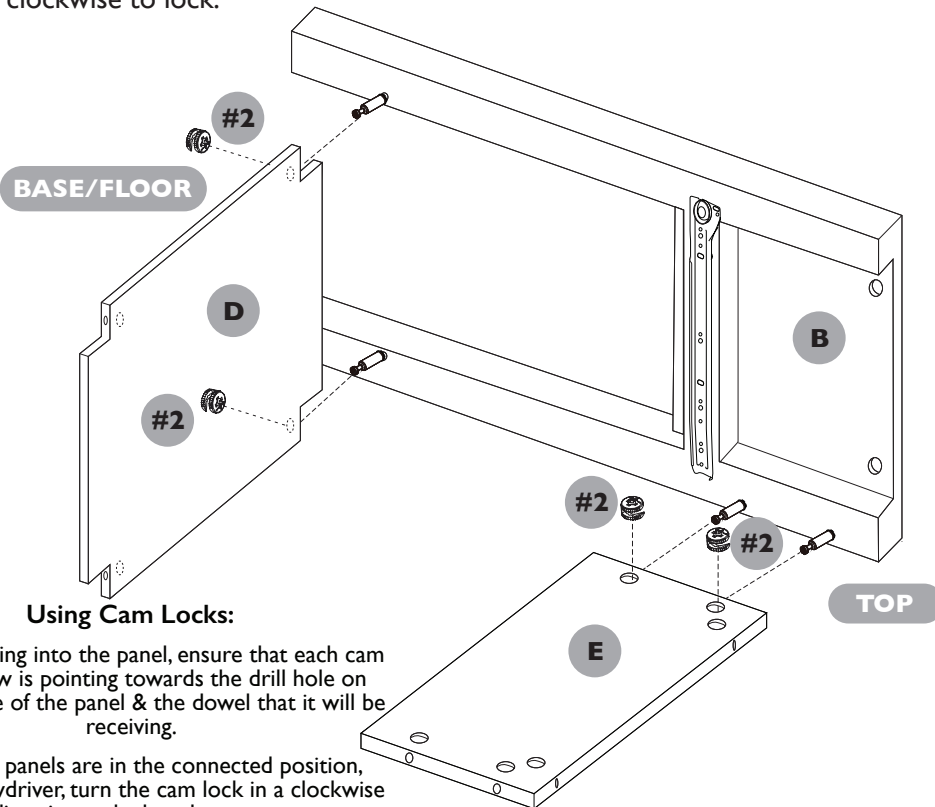

Using Cam Locks:

When inserting into the panel, ensure that each cam lock's arrow is pointing towards the drill hole on the side edge of the panel & the dowel that it will be receiving.

When the panels are in the connected position, using a screwdriver, turn the cam lock in a clockwise direction to lock and secure.


Hardware for Step 4:



4x #2 Cam Locks


STEP 4:

Now align side panel (C) to join with panels (D & E) using the cam dowel hardware. Push into position and insert 4x cam locks (#2) into the large drill holes on panels (D & E) and turn clockwise to secure.

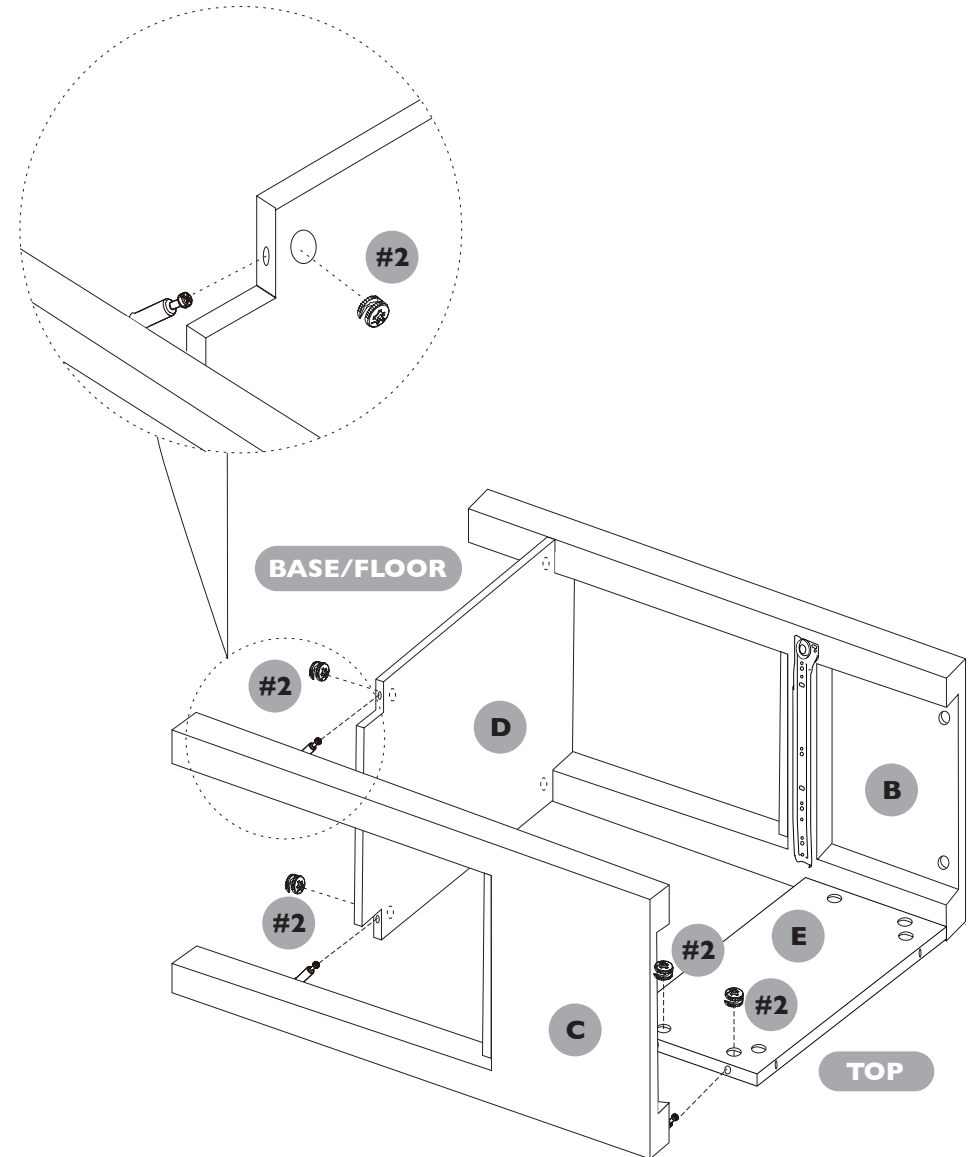


STEP 5:

Take top panel (A) and insert 6x cam dowels (#1) into the drill holes.

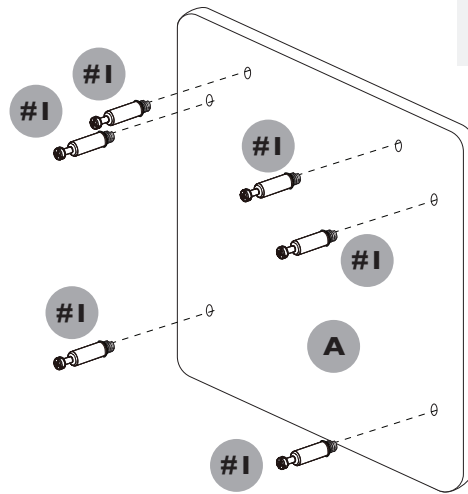


Hardware for Step 5:




6x #1 Cam Dowels

STEP 7:

Take drawer front panel (H) and insert 4x cam dowels (#1) into the drill holes as shown.

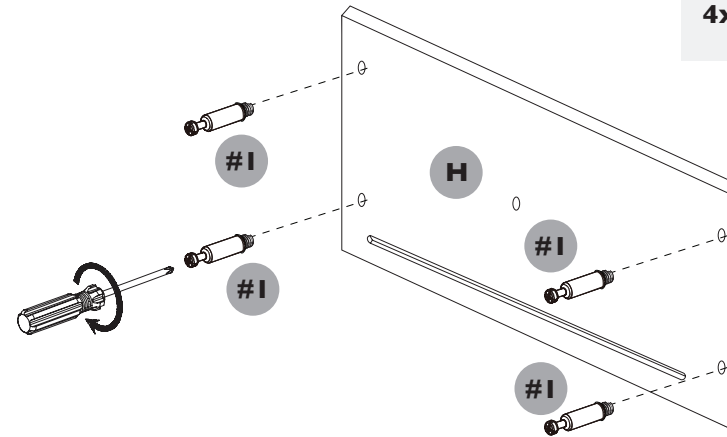

Hardware for Step 7:




4x #1 Cam Dowels

Hardware for Step 6:



6x #2 Cam Locks

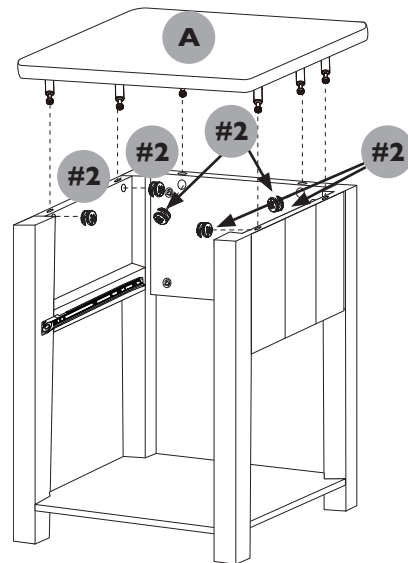

STEP 6:

Stand the bedside table frame on its feet and position top panel (A) over the frame as shown. Align the hardware with the drill holes on the edges of the frame and push into position.

Insert 6x cam locks (#2) into the large holes on the panels on the inside of the bedside table and turn clockwise to lock.

STEP 8:


Take drawer side panel (F) and position L-shaped runner (#5) onto the edge with the drill holes present. The runner will fit the full length of the panel and should be positioned with the wheel at the end next to the 2 small drill holes as shown. It should NOT be on the side with the groove.

Ensure the holes are aligned with the drill holes and fix runner in place with 3x screws (#7).


REPEAT with drawer side panel (G) and L-shaped runner (#6).

Ensure the screws are fully inserted to allow the drawer to run smoothly.

Hardware for Step 8:




1x #5 L-Shaped Runner



1x #6 L-Shaped Runner



6x #7 Screws (12mm)

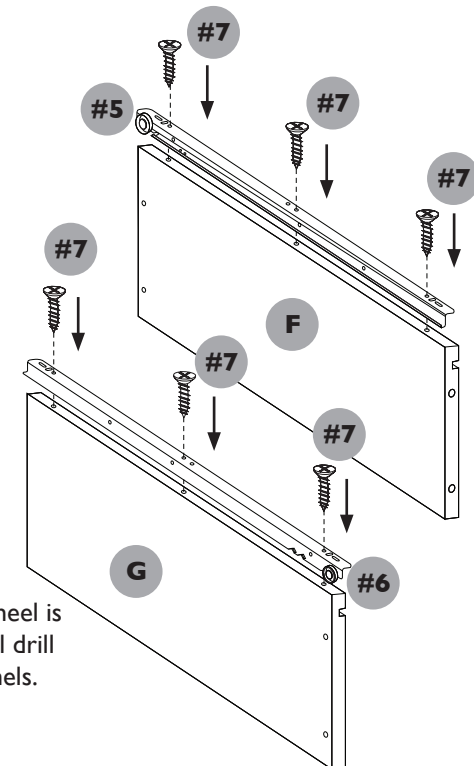


*Note: Ensure the wheel is aligned with the small drill holes on the side panels.

STEP 9:

Create the drawer box by taking drawer side panels (F & G) and join to drawer back panel (J) using 2x screws (#10) on EACH side. Ensure the groove on the inside of the drawer box is aligned on all 3 panels before fixing.

Now slide drawer base panel (I) into the grooves on the drawer box, ensuring it is pushed fully into the groove of panel J.

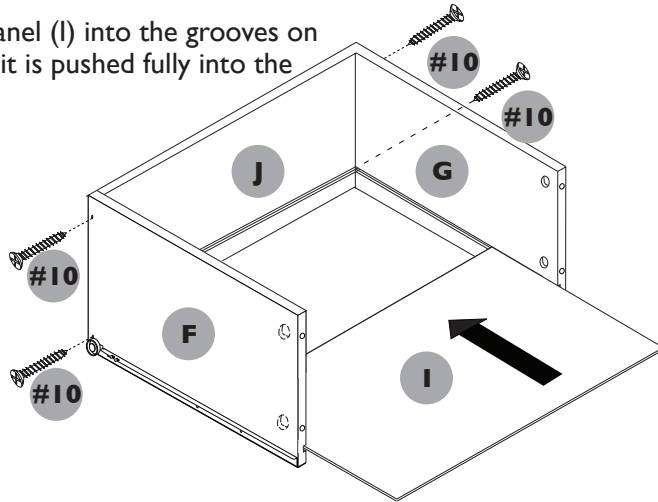

Hardware for Step 9:




4x #10 Screws (25mm)

STEP 11:

Insert the completed drawer into the unit.


Your bedside table is now ready to use.

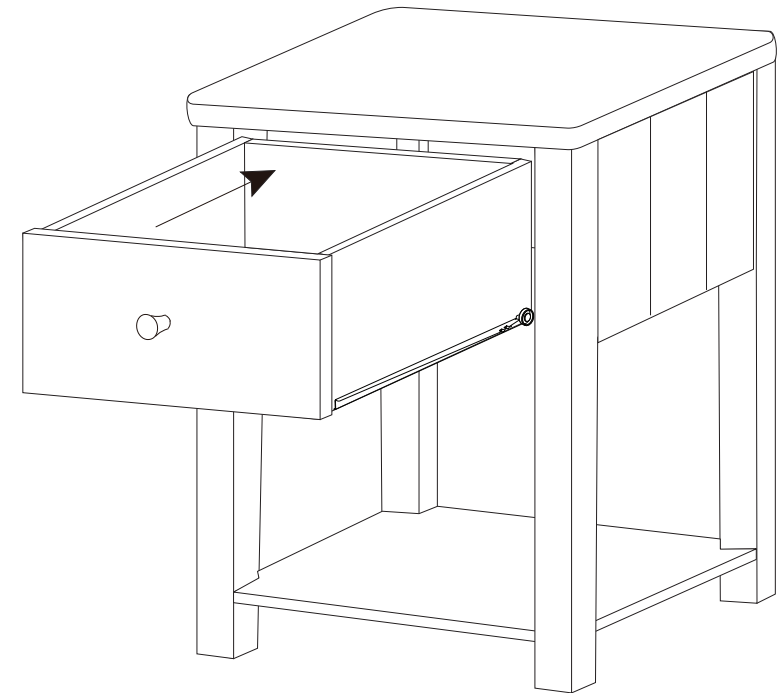

STEP 10:

Take drawer front panel (H) and connect with the drawer box. When in place, insert 2x cam locks (#2) into the large holes on BOTH side panels (F & G) and turn clockwise to secure.


Now attach drawer handle (#8) to the drawer using 1x flat ended screw (#9).

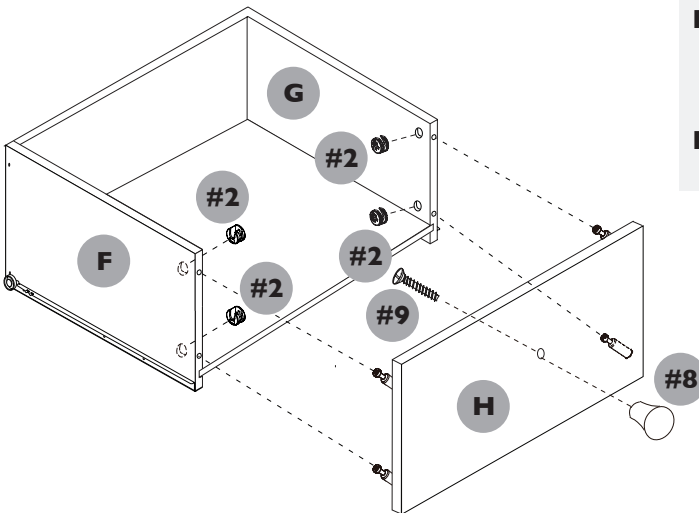

Hardware for Step 10:



4x #2 Cam Locks



1x #8 Handle



1x #9 Flat-Ended Screw