

# Installation Instructions

## 12V LED PATH LIGHT

Rated Voltage 12V AC/DC

Thank you for purchasing this quality product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

**NOTE: This installation instruction applies to the 12V side of the luminaire only.**

**This luminaire is 12V extra-low voltage and can be DIY.**

**Do not plug this luminaire directly into 240V.**

### Warranty

- This luminaire is covered by a 5 year warranty. The warranty is from date of purchase, not the date of installation. Please retain proof of purchase.
- Warranty will be void if there is any damage due to improper usage or modification to the luminaire.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

### Important: Please Read Before Installation


- INSTRUCTIONS PERTAINING TO A RISK OF FIRE, OR INJURY TO PERSONS Lighted lamp is HOT!  
WARNING – To reduce the risk of FIRE OR INJURY TO PERSONS.
  1. Turn off/unplug and allow to cool before replacing lamp.
  2. Lamp gets HOT quickly! Contact only switch/plug when turning on.
  3. Do not touch the hot lens, guard or enclosure.
  4. Keep lamp away from materials that may burn.
  5. Do not touch lamp at any time. Use a soft cloth. Oil from skin may damage lamp.
  6. Do not operate the luminaire fitting with a missing or damaged shield.

SAVE THESE INSTRUCTIONS


### Package Contents

- A. (1) Hat
- B. (1) 18" Stem
- C. (1) Stake

### Product Dimensions



### 1 Install Bulb




Insert the bulb with the correct wattage and type marked on the luminaire label.

**CAUTION:** Do not exceed maximum wattage marked on luminaire label.

**NOTE:** DO NOT touch bulb with bare hands. Use soft cloth to handle bulb.


### 2 Install Base

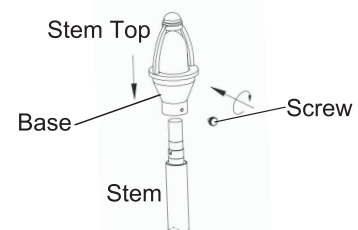

Place the Base over the bulb and thread the stem top onto the stem. Hand tighten Screw until snug.


# Installation Instructions

## 3 Install Stake

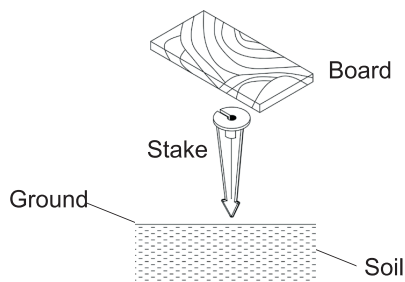


Strip both leads from the luminaire pigtail. Using two wire connectors (sold separately), connect the leads from the luminaire to the main low voltage supply cable leads.

## 4 Install Stem to Stake




Clear away an area in the ground at the wireway slot on the top of the stake. Lay the luminaire pigtail into the wireway slot and attach the stem onto the stake. Tighten until snug.

## 5 Wire Connection

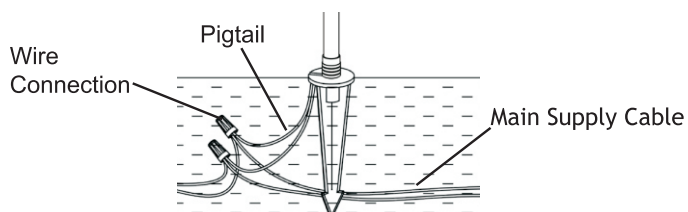

Strip both leads from the luminaire pigtail. Using two wire connectors (sold separately), connect the leads from the luminaire to the main supply cable leads.

## 6 Install Hat



Place the hat of your choice onto the stem top and secure it with the finial. Hand tighten until snug.

## Install/Replace Bulb

Loosen the lock screw to remove the glare guard. Then remove the inner shield to expose the bulb. Replace it with the correct wattage and type marked on the fixture label. Then reinstall the inner shield and glare guard.

**IMPORTANT:** Halogen bulbs must be protected from moisture and dust

at all times. Always reinstall shield when removed.