# NT720

## User Manual
### Bluetooth Receiver

Please read this user manual carefully and keep it for future reference. If you need any assistance, please contact us with your product model number and order number.
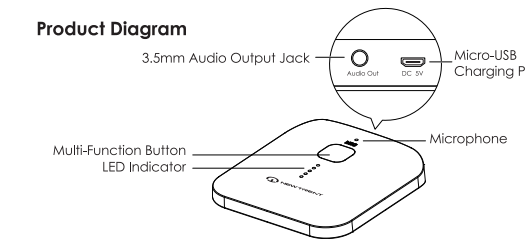
**Contact Us:**
www.newtrent.com/contact

### Included accessories :
- 3.5mm Audio Cable
- 3.5mm to 2-RCA Audio Cable
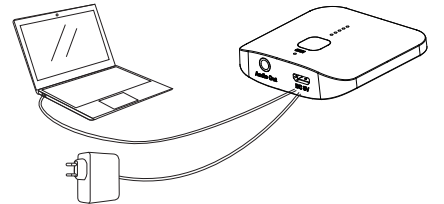- Micro-USB Cable

### Product Diagram



3.5mm Audio Output Jack — Micro-USB Charging Port

Multi-Function Button — Microphone
LED Indicator —

## Specifications

| Model | NT720 |
|---|---|
| Technology | BT 4.1, A2DP, AVRCP, HFP, HSP |
| Frequency Range | 2.402GHz~2.480GHz |
| Frequency Response | 20Hz~20kHz |
| Signal-to-Noise Ratio | ≥75dB |
| Input | DC 5V |
| Charging Time | 2.5 hours |
| Continuous Use Time | 13 hours |
| Battery Type | Li-Polymer (150mAh) |
| Operating Range | Up to 10m / 33' |

## Getting Started

Please fully charge NT720 before the first use. To charge, connect it to a USB charger or charging port with the included micro-USB cable. When the red LED indicator turns off, your NT720 is fully charged and ready for use. Charging takes around 2.5 hours.



### Powering On / Off
- Press and hold the multi-function button for 3 seconds to power "on" with the LED indicator flashing blue and red lights simultaneously three times.
- Press and hold the multi-function button for 5 seconds to power "off "with the LED indicator turning off .

## Pairing

1. Power on the NT720 and it will automatically enter pairing mode with the LED indicator flashing red and blue alternately.
2. Activate the pairing function of your bluetooth compatible audio device (like a smartphone) and select "NT720".
3. If a code or pin is required for pairing, enter "0000".
4. When successfully connected, the LED indicator will turn solid blue.
5. Connect one end of the included 3.5mm audio cable to the 3.5mm audio jack on the NT720, and connect the other end of the cable to your audio equipment (speaker, stereo system, or car audio system). Or connect your wired headphones directly to the NT720 for audio.

### Simultaneous Connection with Two Devices
The NT720 can simultaneously connect two bluetooth devices (such as phones), but sound can only be received from one source at a time.
1. Follow the instructions in the "Pairing" section to pair the NT720 with Device A.
2. Once paired, disable the bluetooth function on Device A and the receiver will automatically enter pairing mode. Or you can long-press the multi-function button for 2 seconds to enter pairing mode.
3. Follow the instructions in the "pairing" section to pair with Device B.
4. Once paired with Device B, reactivate the bluetooth function on Device A and select "NT720" in the list of paired devices.

### Notes
- The NT720 will automatically enter standby mode after 2 minutes in pairing mode if no device is paired.
- If your paired device is turned off or disconnected or out of operating range (10m/33ft), the NT720 will automatically enter pairing mode. After 2 minutes, the NT720 will change to standby mode. Select "NT720" in your device to reconnect the last successfully paired device.
- The receiver will automatically shut down after 10 minutes if it is not connected with any devices.

## Controls & LED Indicator

| Functions | Instructions |
|---|---|
| Answer / End a call | Short-press multi-function button |
| Reject an incoming call | Press and hold the multi-function button for 2 seconds |
| Redial last-called number | Double-press the multi-function button when connected |
| Voice switching | During a call, double-press the multi-function button to switch from the device to your phone for talking |
| Device switch | When you have 2 phones connected and get a call on one during a call on the other, double-press the multi-function button to switch between two phone calls |
| Play / Pause | Press multi-function button once |
| Cancel pairing | Long-press the multi-function button for 2 seconds. |

| LED Indicator | Status |
|---|---|
| Blue and red flash alternately | Pairing mode |
| Blue on | Connected / Playing music |
| Blue flashes steadily | Standby time |
| Blue quickly flashes three times every 5 seconds | Incoming call |
| Blue and red simultaneously flashes once every 3 seconds | In call |
| Red flashes | Low battery |
| Red on | Charging |
| Red off | Fully charged |
| Light off | Power off |

## Product Care & Use
- Keep away from liquids and extreme heat.
- Do not use headphones or speakers at high volume for extended periods, as this may cause permanent hearing damage or loss.

## Caution
Changes or modifications made to this device may void the user's authority to operate this equipment.

Any question?
Contact us at www.newtrent.com/contact