


RPM ACETATE

INSTRUCTION MANUAL




Change the way you think about time

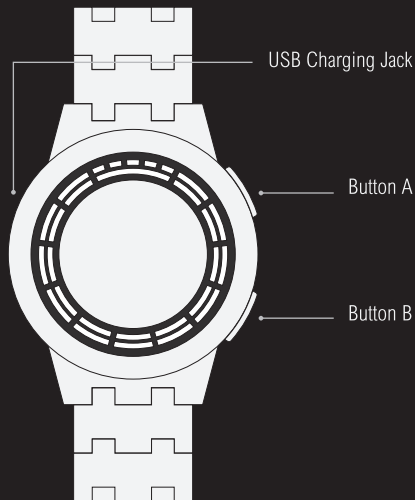


1. How to read the time

- Press button A to display the time.
- All LEDs will light up and the time will be shown.
- The current time is indicated by the blinking LEDs.
- The time display will turn off after 7 seconds.

Hours: 1-12



Minutes: Groups of 5
5, 10, 15, 20, etc



Minutes: 1-4



PM / Charging indicator



PM / Charging indicator



Examples

3:49

the 3 o'clock light is flashing
the 45 minute light is flashing
4 minute lights are flashing



6:06

the 6 o'clock light is flashing
the 5 minute light is flashing
1 minute lights is flashing



2. How to set the time and animation

- Press and hold button B for 3 seconds to enter setting mode.

Note after 7 seconds of inactivity setting mode will deactivate

I. Setting the hour

- The hour LEDs will flash when you are in hour setting mode.
- Press button A to increase the hours as required.
- The PM indicator will flash to indicate PM mode.
- Press button B to confirm and move to the minutes.

II. Setting the minutes

- The minute LEDs will flash when you are in minute setting mode.
- Press button A to increase the minutes as required.
- Press button B to confirm and move to the animation.

III. Setting the animation

* This watch has a light-up animation feature. The LEDs will animate once every 15 minutes between 6pm and 12am.

- In setting mode, when the animation feature is on, the LEDs will animate.
- In setting mode, when the animation feature is off, all LEDs will flash.
- Press button A to turn the animation on or off.
- Press button B to confirm and when the LEDs go out, setting is complete.

Note after 7 seconds of inactivity setting mode will deactivate

3. How to recharge the battery


- This watch has a USB rechargeable battery.
- When the lights become dim or do not light up, you should recharge the battery.
- To recharge the battery, unscrew the USB cap using the screw driver provided and connect the USB charging cable to the USB charging jack.
- Connect the charging cable to a power source, e.g. your computer.
- When charging, the LED charging indicator will blink.
- When the charging indicator stops blinking, the battery is 90% charged.

It is advised that you continue to charge the battery for a full 3.5 hours to ensure the battery is 100% charged.



- It is advised that you use the screw driver provided when opening the USB cap so as not to damage the head of the screw.
- Items included in the box:

- Watch
- USB cable
- Spare USB cap
- Screwdriver
- Instruction Manual



4. User informations

I. Battery

- This watch uses an LIR 2032 rechargeable battery only.
- The LIR 2032 rechargeable battery is replaceable.
- Battery lifetime will vary depending on use, but is estimated at approximately 300 charges.
- To maximize battery life, turn the animation off.
- The plug standard input voltage for the LIR 2032 battery is DC5V. You should use only the cable provided with the watch when recharging.

II. Warranty

- This watch is covered by a 1 year manufacturers warranty. This warranty does not cover water damage, accidental damage, neglect or unauthorized repair.

III. Caution

- This watch is water resistant to 3ATM. Please do not use the watch in the shower, for swimming or for other water related activities.
- Please only use the cable provided with the watch for recharging as it is designed especially for this watch.

SPECIFICATIONS


Case Materials	Acetate with inner Stainless Steel Structure
Strap Materials	Acetate
Case Dimensions	44 / 53.3 / 15 mm
Finish	Polished
Maximum Fit Wrist Size	210mm (approx.)
Weight	60g
Display	Digital Tubes
Battery	3.6V LIR 2032 Rechargeable
Water Resistancy	3 ATM

RPM ACETATE

取り扱い説明書




Change the way you think about time

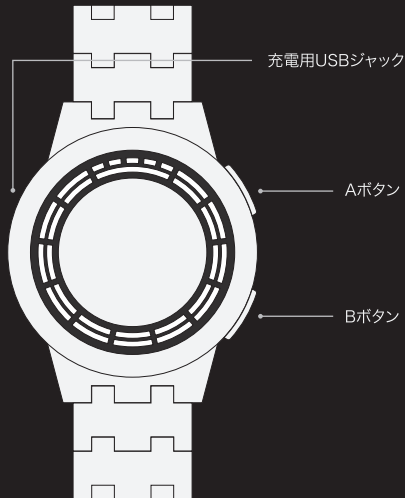

1. 時刻の読み方

- ・ Aボタンを押すと時刻表示がスタートします。
- ・ 全てのLEDが点灯し時刻を表示します。
- ・ LEDが点滅した箇所が現在時刻です。
- ・ 時刻表示は7秒後自動的に終了します。

時: 1-12



1分単位: 1-4



5分単位
5, 10, 15, 20, etc



PM / 充電中



時刻表示例

3:49

- 3時のLEDが点滅
- 45分のLEDが点滅
- 4分のLEDが点滅



6:06

- 6時のLEDが点滅
- 5分のLEDが点滅
- 1分のLEDが点滅



2. 時刻・アニメーションの設定

- ・ Bボタンを3秒間押し続けると設定モードになります。
※7秒間何も操作をおこなわないと、設定モードは自動的に終了します。

1. 「時」の設定

- ・ 「時」の設定時は、時間表示のLEDのみが点滅します。
- ・ Aボタンで1時間ずつ増やすことができます。
- ・ PM時間帯の設定時にはPMインジケーターが点します。
- ・ Bボタンを押すと確定して次の「分」の設定に移動します。

PM / 充電中



II. 「分」の設定

- ・「分」の設定時は、分表示のLEDのみが点滅します。
- ・Aボタンで1分ずつ増やすことができます。
- ・Bボタンを押すと確定して次の「アニメーション」の設定に移動します。

III. 「アニメーション」の設定

※本品にはLEDによる光のアニメーション表示があります。
アニメーションを設定すると、6pmから12amの間、15分ごとに1回アニメーションが表示されます。

- ・設定モードでは、アニメーションがONの場合はアニメーションが表示されます。
- ・また、アニメーションがOFFの場合は全てのLEDが点滅します。
- ・AボタンでアニメーションのONとOFFの切り替えができます。
- ・Bボタンを押すと確定してLEDが消灯し、設定モードは終了します。

※7秒間何も操作をおこなわないと、設定モードは自動的に終了します。

3. バッテリーの充電方法

- ・本品はUSB充電バッテリーを内蔵しています。
- ・LEDの輝度が弱くなったり、点灯しなくなった場合は、バッテリーを充電してください。
- ・充電する場合は、付属のドライバーでUSBキャップをはずし、USBケーブルをUSBジャックに接続してください。
- ・USBケーブルの片方の端子をパソコンなどの電源供給が可能なUSBジャックに接続してください。
- ・充電中はLEDの充電インジケーターが点滅します。
- ・バッテリーが90%まで充電されると、ブルーLEDの充電インジケーターが点灯に変わります。
100%のフル充電をされる場合は、約3.5時間の連続充電をおこなってください。


PM / 充電中



- ・USBキャップをはずす場合、ねじを損傷しないように付属のドライバーを使用してください。

・ 付属品

- ・ 本体
- ・ USB ケーブル
- ・ スペア用USB キャップ
- ・ ドライバー
- ・ 取り扱い説明書



4. インフォメーション

I. バッテリー

- ・本品にはLIR 2032充電バッテリーが内蔵されています。
- ・LIR 2032充電バッテリーは交換可能です。
- ・バッテリーの寿命は使用状況によって異なりますが、およそ300回の充電が可能です。
- ・アニメーションの設定をOFFにすると、バッテリーの寿命を長くすることができます。
- ・LIR 2032充電バッテリーの入力電圧はDC5Vです。充電の際は必ず付属の専用USBケーブルをご使用ください。他のUSBケーブルを使用するとモジュールを破損させる可能性があります。

II. 保証

- ・生産時に生じた不良にのみ1年間の無償修理を保証します。不注意による故障、破損、水没等は保証期間内であっても有償修理となりますので、ご了承ください。

III. ご注意

- ・この商品は3気圧防水(日常生活防水)です。シャワーやスイミングまたは、水を扱う際の使用はお避けください。
- ・充電の際は必ず付属の専用USBケーブルをご使用ください。付属のUSBケーブルは、この商品専用設計された特別なケーブルです。

商品仕様

ケース素材	アセテート二重構造 (内側はステンレス素材)
ストラップ素材	アセテート
ケースサイズ	44 / 53.3 / 15 mm
仕上げ	光沢
最大装着 リストサイズ	約210mm
重量	60g
ディスプレイ	デジタルチューブ
バッテリー	3.6V LIR 2032 充電バッテリー
防水性能	3気圧(日常生活防水)

