

QUICK START GUIDE


1 Switch To The Right System

Please switch the keyboard to the same system as your computer's operating system.



FN + CAPS

Press FN + CAPS to Switch Mac / Win

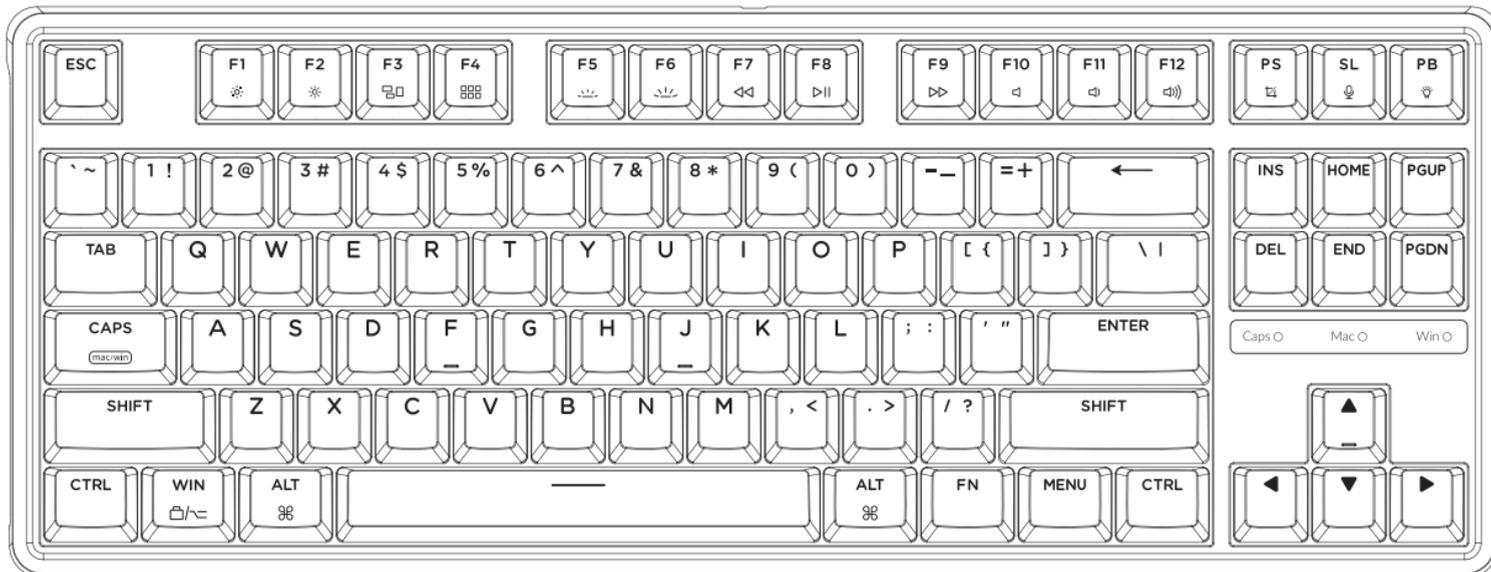

2 The VIA Key Remapping Software

Please visit caniusevia.com to download the latest VIA software to remap the keys. If the VIA software cannot recognize your keyboard, please reach out to our support to get the instruction.




3 The Layers

There are four layers of key settings on the keyboard. The layer 0 and layer 1 are for the Mac system. The layer 2 and layer 3 are for the Windows system.

If your keyboard is switched to Mac, then layer 0 will be activated.

If your keyboard is switched to Windows, then the layer 2 will be activated. Remember that if you are using it in Windows mode, please make changes to the layer 2 instead of the top layer (the layer 0). This is a common mistake people are making.



5 Adjust The Backlight Brightness

Press FN + W to increase the backlight brightness



Press FN + S to decrease the backlight brightness



7 The Key Rollover

Press FN + N to switch 6-key rollover/N-key rollover



6-key rollover: the keyboard can detect up to 6 simultaneous key inputs.
N-key rollover: the keyboard can detect all key inputs without limit to the number of key presses.

* The keyboard turns on the N-key rollover by default.

4 The Backlight

Press FN + Q to change the lighting effect



Press FN + TAB to turn the backlight on/off



6 Activate Siri / Cortana

For Siri on Mac: Go to System preferences > Siri > select "Hold Command Space" option.

*Siri key only works on macOS and does not work on iOS.



For Cortana on Windows: Select Start > Settings > Cortana and select the shortcut by pressing Windows key + C key.

*Windows Cortana is only available for Windows 10 and above OS. Cortana is only available in certain countries / regions and might not work everywhere.




8 Factory Reset



Troubleshooting? Don't know what's going on with the keyboard?

- 1 Plug in the power cable and factory reset the keyboard by pressing fn + J + Z (for 4 seconds).
- 2 Download the right firmware and QMK Toolbox from our website.
- 3 Unplug the power cable. Hold the ESC key* first and then plug the cable in again.
- 4 Release the ESC key, and the keyboard will now enter DFU mode. Please flash the firmware with QMK Toolbox.
- 5 Factory reset the keyboard again by pressing fn + J + Z (for 4 seconds).

* Or hold the reset button under the space bar keycap.



Not Happy

support@keychron.com