

Allegro II

Convector



Allegro II²⁶

Allegro II¹⁸

Allegro II¹⁴



Features

Color

- Standard: white.

Finish

- Standard: epoxy/polyester anti-rust powder coating resistant to UV rays.

Voltage

- 240/208V, 60 Hz, 1-phase.

Construction

- Steel cabinet featuring rounded corners and openings that prevent access to the heating element.
- Double opening front air outlet that directs warm air towards the centre of the room. **1**
- High-limit temperature control with automatic reset.

Heating element

- X-shaped, monoblock element made of surface-treated extruded aluminum. **2**

Control

- Built-in electronic proportional-action digital thermostat, ultra-precise to 1/10 °C (1/5 °F), located at the top of the unit. **3**
- LCD backlit display with digital controls lockable by key combination.
- Temperature display format (°C or °F).
- "On-Off" button.
- "Mode" button to choose from Comfort, Economy and Frost Protection modes.
- Heating indicator light.

Installation

- Quick surface-mounted installation, with the included wall mounting bracket, that also serves as marking template.
- Flexible cable with electrical wall box cover plate included.
- Requires installation of a wall electrical box not supplied.

Warranty

- 2-year warranty against defects.
- 5-year warranty on the heating element.

Application

- Kitchen, living room, family room, bedroom, bay window.

Thanks to their distinctive features, Allegro II series convection heaters blend elegance and performance. There are three different profiles available to ensure you can enjoy optimal comfort in any space.



1




2




3


Recommended installation height		Minimum clearances							
		Front		Sides		Above		Below	
in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
4	102	20	508	6	152	4	102	4	102

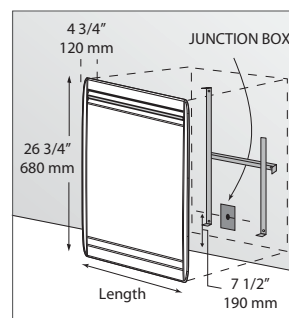

Allegro II²⁶

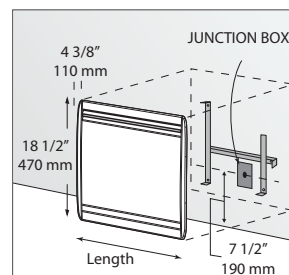

Allegro II¹⁸

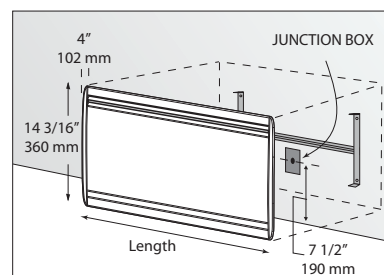

Allegro II¹⁴

Note: The depth shown includes wall bracket.

Models

Product #		Volts	Watts	Length		Weight	
				in.	mm	lb	kg
Allegro II ¹⁴ Height: 14 3/16" (360 mm)							
7305-C05-BB		240/208	500/375	19 1/4	489	9.6	4.4
7305-C10-BB		240/208	1000/750	25 9/16	649	11.9	5.4
7305-C15-BB		240/208	1500/1125	33 7/16	849	15.0	6.8
7305-C20-BB		240/208	2000/1500	44 7/16	1129	18.8	8.5
Allegro II ¹⁸ Height: 18 1/2" (470 mm)							
7306-C05-BB		240/208	500/375	16 1/8	409	10.6	4.8
7306-C10-BB		240/208	1000/750	19 1/4	489	11.2	5.1
7306-C15-BB		240/208	1500/1125	25 9/16	649	13.7	6.2
7306-C20-BB		240/208	2000/1500	33 7/16	849	16.8	7.6
Allegro II ²⁶ Height: 26 3/4" (680 mm)							
7307-C05-BB		240/208	500/375	12 15/16	329	12.4	5.6
7307-C10-BB		240/208	1000/750	16 1/8	409	14.2	6.4
7307-C15-BB		240/208	1500/1125	22 3/8	569	17.6	8.0
7307-C20-BB		240/208	2000/1500	30 1/4	769	22.9	10.4

