

INSTRUCTION MANUAL FOR OMEGA Induction Cooktop

OCI64PP

Thank you for introducing our family to yours

At Omega, we understand that cooking, cleaning and washing may not be your favourite things in the world. That's why we created a range of no-nonsense, reliable products that always get the job done for you. With the features you need and nothing you don't. What's more, they're made to fit perfectly into your home life and your wallet.

We aim to simplify any further appliance purchases. When researching our products you will find a range of icons that visually represent our products key features. Visit our website to learn more about these icons and the features and benefits of our products.

You are welcoming an Omega appliance into your place and you can be sure it'll always serve you well.

For important information about your Omega such as warranty registration, online manuals, specifications and catalogues, please visit www.omegaappliances.com.au/customer (if you are in Australia) or www.omegaappliances.co.nz/customer (if you are in New Zealand).

Make sure you activate your product warranty on our websites on the links above.

If you want to know more about promotions, to receive cool tips and tailor made content, like us on www.facebook.com/omegaappliances and follow us on www.instagram.com/omegaappliances_aus.

We hope you love this product as much as we do!



www.omegaappliances.com.au / www.omegaappliances.co.nz



omegaappliances



omegaappliances_aus

READ THE INSTRUCTION BOOKLET BEFORE INSTALLING AND USING THE APPLIANCE.

It is important that you retain these instructions, proof of purchase as well as other important documents about this product for future reference.

The manufacturer will not be responsible for any damage to property or to persons caused by incorrect installation or improper use of the appliance.

Due to continual product development, Omega reserves the right to alter specifications and appearances without notice.

CONTENTS

IMPORTANT SAFETY INSTRUCTIONS	4-6
INSTALLATION	7-12
PRODUCT DESCRIPTION	13-14
OPERATION INSTRUCTIONS	15-21
COOKING GUIDELINES	22-23
CLEANING AND MAINTANENCE	24-25
HINTS AND TIPS	26-27
FAILURE AND DISPLAY AND INSPECTION	28-30
DISPOSAL	31
WARRANTY CONDITIONS	32

IMPORTANT SAFETY INSTRUCTIONS

IMPORTANT: Read the assembly instruction section and safety precautions of this booklet carefully before removing the contents of this carton.

- 1. This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience or knowledge, unless they have been given supervision or instruction concerning the use of the appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the appliance.
- 2. After removing the packaging, make sure to check if there is any damage to the appliance. If there is any damage, never attempt to install the appliance and immediately contact your retailer. As packaging materials can be dangerous to children, they need to be collected immediately and put out of reach.
- In certain circumstances electrical appliances may be a safety hazard. Check the
 conformity of voltage and power settings, which are specified on the information
 plate attached to the appliance and/or packaging, with the usage conditions
 available.
- 4. Do not place heavy objects in or on these appliances, use for storage or as a cutting surface as sharp edges can damage the surface. This appliance is designed for cooking food only. Use flat based, stable, inductive cooking rated cooking vessels only.
- 5. This appliance is designed for domestic household use only and for the cooking of domestic food products. Use as a commercial appliance will void the warranty. It should not to be used in a marine environment or outdoors and must be fully built in. Do not use the appliances until fully installed.
- 6. A means for disconnection must be incorporated in the fixed wiring in accordance with the wiring rules.
- 7. The electrical connection must be accessible after installation. The appliance must be electrically isolated before any maintenance can be performed.
- 8. The appliance is not intended to be operated by means of an external timer or separate remote-control system.
- Electrical connection must be made as per local wiring rules and regulations. Do not disconnect the appliance with wet hands or bare feet, and do not disconnect the power cord with extreme force.
- 10. Ensure that the kitchen is well ventilated or mechanical ventilation is in use while cooking on this appliance.
 Do not store or use flammable materials or aerosols near the cooktop. Items
 - made from aluminium, plastic, plastic film & sugar-based foods should also be kept away from the appliance, as they may fuse to the surface.



- 11. **WARNING** The surface temperature of this appliance exceeds 95°C. To avoid a hazard, under bench access must be restricted. A board must be installed underneath the cooktop. Heat from the underside of the unit will be expelled by inbuilt fans – do not block.
- 12. **WARNING** The cooktop will become hot during and directly after use. Do not touch the surface during this time, as it may be hot and can cause burns. To avoid burns, children should be kept away.
- 13. Cleaning may only be commenced on the appliance once it has cooled down and is turned off. Failure to clean properly can damage the unit. Do not use a steam clean, steam jet or any other high-pressure cleaning equipment to clean the appliance.
- 14. When the appliance is not being used, turn the appliance off.
- 15. Where this appliance is installed in a caravan, it shall NOT be used as a space heater.
- 16. Do not modify this appliance.
- 17. Do not use harsh abrasive cleaners or sharp metal scrapers to clean the glass surface as they can scratch the surface, which may result in the glass shattering. Clean the glass using a warm damp cloth (e.g. dishcloth) and dry it with a soft dry tea towel.
- 18. All cabinetry and materials used in the installation must be able to withstand a minimum temperature of 50°C above the ambient temperature of the room it is located in, whilst in use. Certain types of vinyl or laminate kitchen furniture are particularly prone to heat damage or discolouration at temperatures below the guidelines given above. Any damage caused by the appliance being installed without adhering to the temperature limits set out above will be the liability of the owner. To avoid any hazards, limit access to the under-bench section of the cooktop.
- 19. Damage can occur to bench tops if pots and pans are allowed to overlap the bench top. This can result in heat being transferred to the bench top. Ensure that correct sized pots & pans are used. Pans should be lifted on and off the cooktop surface and not dragged. Cooking zones should not be switched on without cookware placed on it. Do not place empty cookware onto the cooking zones when in use.
- 20. If any cracking is noticed on the cooktop, turn the appliance off immediately and call your Omega Service Centre.

IMPORTANT SAFETY INSTRUCTIONS

- 22. Do not leave the cooktop while cooking with solid or liquid oils. There may be flaming up in conditions of extreme heating. Never pour water onto the flames occurring from oil. Immediately turn the cooktop off and cover the pan with a lid or fire blanket in order to smother the flame.
- 23. Users with pacemakers should keep their upper body at least 30cm away from any operational inductive cooking zone. If in doubt, please consult your doctor before use.
- 24. Do not place metal objects such as spoons or pan lids onto the cooktop as they may become hot or cause damage to the surface.
- 25. A small amount of noise will sometimes be heard as elements turn on & off during operation. This is normal & not a fault.
- 26. **WARNING**: If the surface is cracked, switch off the appliance to avoid the possibility of electric shock.
- 27. Metallic objects such as knives, forks, spoons and lids should not be placed on the hob surface since they can get hot.
- 28. Danger of fire: Do not store items on the cooking surfa ce.
- 29. **CAUTION**: The cooking process has to be supervised. A short term cooking process has to be supervised continuously.
- 30. **WARNING**: Unattended cooking on a hob with fat or oil can be dangerous and may result in a fire.
- 31. If the supply cord is damaged, it must be replaced by Omega Service Centre in order to avoid a hazard.
- 32. If the appliance is being hardwired, it must be installed by an authorized technician.


Cut out work the surface according to the sizes shown in the drawing.

For the purpose of installation and use, a minimum of 5 cm space shall be preserved around the hole.

Be sure the thickness of the surface is at least 30mm. Please select heat-resistant and insulated work surface material (Wood and similar fibrous or hygroscopic material shall not be used as surface material unless impregnated) to avoid the electrical shock and larger deformation caused by the heat radiation from the hotplate. As shown below:



Note: The safety distance between the sides of the hob and the inner surfaces of the worktop should be at least 3mm.

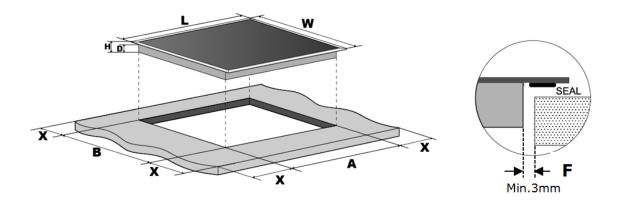

L(mm)	W(mm)	H(mm)	D(mm)	A(mm)	B(mm)	X(mm)	F(mm)
590	520	60	56	560+4+1	490+4+1	50 min.	3 min.

Under any circumstances, make sure the Induction cooker hob is well ventilated and the air inlet and outlet are not blocked. Ensure the induction cooker hob is in good work state. As shown below



Note: The safety distance between the hotplate and the cupboard above the hotplate should be at least 650 mm.


Ventilation Requirement


All induction cooktops are fitted with cooling fans that draw fresh air in from the rear of the unit and expel the warm air through vents at the front.

When installing your cooktop the following ventilation requirements are as follows:

- 5 mm ventilation cut out below the bench top the width of the cooktop.
- 10 mm ventilation cut out in the base of the kick plate.
- 50 mm gap behind the oven or draws.
- A minimum gap of 30 mm between the oven and base of the cooktop.
- Ventilation gaps should not be obstructed by any drawers, cupboards, etc.

This diagram is a typical example when fitted above an oven or drawers.

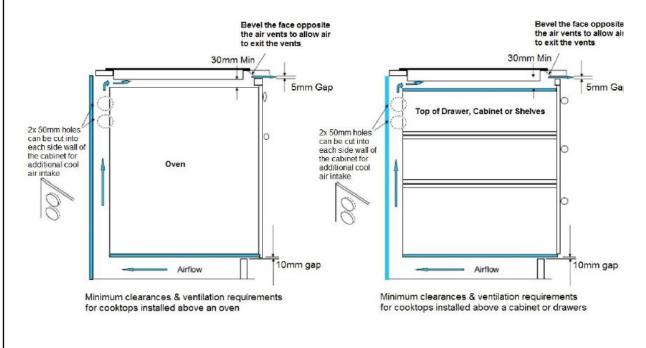

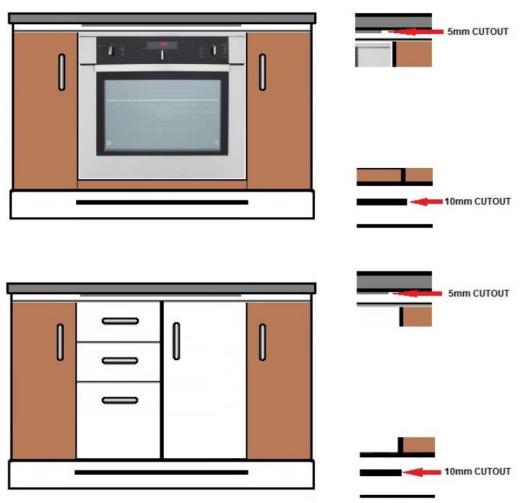





- Be aware that the glue that join the plastic or wooden material to the furniture, has to resist to temperature not below 150°C, to avoid the unstuck of the paneling.
- There are ventilation holes around outside of the hob. YOU MUST ensure these holes are not blocked by the worktop when you put the hob into position.
- The rear wall, adjacent and surrounding surfaces must therefore be able to withstand an temperature of 90°C.

Before installing the hob, make sure that

- The work surface is square and level, and no structural members interfere with space requirements.
- The work surface is made of a heat-resistant and insulated material.
- If the hob is installed above an oven, the oven has a built-in cooling fan.
- The installation will comply with all clearance requirements and applicable standards and regulations.
- A suitable isolating switch providing full disconnection from the mains power supply is incorporated in the permanent wiring, mounted and positioned to comply with the local wiring rules and regulations.
- The isolating switch must be of an approved type and provide a 3 mm air gap contact separation in all poles (or in all active [phase] conductors if the local wiring rules allow for this variation of the requirements).
- The isolating switch will be easily accessible to the customer with the hob installed.
- You consult local building authorities and by-laws if in doubt regarding installation.
- You use heat-resistant and easy-to-clean finishes (such as ceramic tiles) for the wall surfaces surrounding the hob.

After installing the hob, make sure that

- The power supply cable is not accessible through cupboard doors or drawers.
- There is adequate flow of fresh air from outside the cabinetry to the base of the hob.
- If the hob is installed above a drawer or cupboard space, a thermal protection barrier is installed below the base of the hob.
- The isolating switch is easily accessible by the customer.

Before locating the fixing brackets


The unit should be placed on a stable, smooth surface (use the packaging). Do not apply force onto the controls protruding from the hob.


Adjusting the bracket position

Fix the hob on the work surface by screw 2 brackets on the bottom of hob(see picture) after installation.

Adjust the bracket position to suit for different table top thickness.



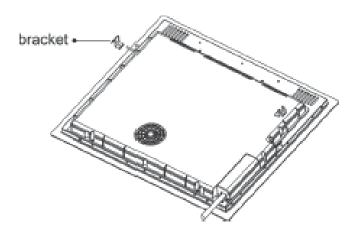

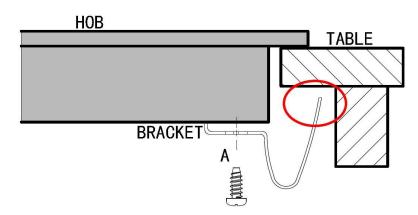



Under any circumstances, the brackets cannot touch with the inner surfaces of the worktop after installation (see picture).

Cautions

- 1. The induction hotplate must be installed by qualified personnel or technicians. We have professionals at your service. Please never conduct the operation by yourself.
- 2. The hob will not be installed directly above a dishwasher, fridge, freezer, washing machine or clothes dryer, as the humidity may damage the hob electronics
- 3. The induction hotplate shall be installed such that better heat radiation can be ensured to enhance its reliability.
- 4. The wall and induced heating zone above the table surface shall withstand heat.
- 5. To avoid any damage, the sandwich layer and adhesive must be resistant to heat.
- 6. A steam cleaner is not to be used.

O omegaappliances_aus

Connecting the hob to the mains power supply



This appliance is provided with a 10A power plug.

Before connecting the hob to the mains power supply, check that:

- 1. The domestic wiring system is suitable for the power drawn by the hob.
- 2. The voltage corresponds to the value given in the rating plate
- 3. The power supply cable sections can withstand the load specified on the rating plate.

To connect the hob to the mains power supply, do not use adapters, reducers, or branching devices, as they can cause overheating and fire.

The power supply cable must not touch any hot parts and must be positioned so that its temperature will not exceed 75°C at any point.

- If the cable is damaged or to be replaced, the operation must be carried out the by after-sale agent with dedicated tools to avoid any accidents.
- If the appliance is being connected directly to the mains an omnipolar circuit-breaker must be installed with a minimum opening of 3mm between contacts.
- The installer must ensure that the correct electrical connection has been made and that it is compliant with safety regulations.
- The cable must not be bent or compressed.
- The cable must be checked regularly and replaced by authorised technicians only.



- Allow disconnection of the appliance after installation.
- If the appliance is being hardwired, a means for disconnection must be incorporated in the fixed wiring in accordance with the wiring rules.

PRODUCT DESCRIPTION

About this cooktop:

This cooktop has been designed with a <u>power limiter</u> to ensure the cooktop does not exceed 2200W, allowing it to be plugged in to a standard 10amp power socket.


Note: if hardwiring, the power limitations will remain.

Using the cooktop:

Maximum of one or two zones used in conjunction will provide optimal results.

As the cooktop is equipped with a power limiter, when more zones are turned on the power level will change for each zone. See below explanation:

- Use any one zone at full power (level 9)
- Use any two zones in conjunction at max power level 7 for both zones (eg. Zone 1 & 2, Zone 1 & 3 etc.)
- Use any three or four zones in conjunction and the max power level will be as follows:
 - Zone 1 power level 2
 - o Zone 2 power level 3
 - o Zone 3 power level 4
 - o Zone 4 power level 5

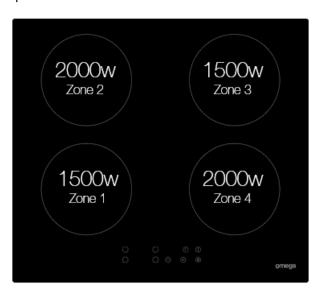

Below table shows approximate times to boil 1 litre of tap water:


Power level	1500w Zone	2000w Zone
9	Under 5 min	Under 3min
	(onsite testing 4min 43sec)	(onsite testing 2min 54sec)
7	Under 7 min	Under 6 min
	Onsite testing 6min 15sec)	(onsite testing 5min 40sec)

Note – these results are indicative only, results may vary depending on users cookware and water temperature.




PRODUCT DESCRIPTION

Top View



- 1. Max. 1500 W zone
- 2. Max. 2000 W zone
- 3. Max. 1500 W zone
- 4. Max. 2000 W zone
- 5. Glass plate
- 6. Control panel

Control Panel

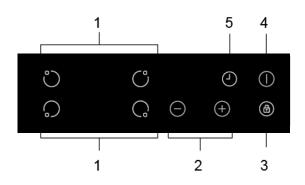


- 1. Heating zone selection controls
- 2. Power / Timer regulating key
- 3. Keylock control
- 4. ON/OFF control
- 5. Timer control

Technical Specification

Cooking Zones	4 Zones
Supply Voltage	220-240V~ 50Hz or 60Hz
Installed Electric Power	2200W
Product Size LxWxH(mm)	590X520X60
Building-in Dimensions AxB (mm)	560X490

Touch Controls

- The controls respond to touch, so you don't need to apply any pressure.
- Use the ball of your finger, not its tip.
- You will hear a beep each time a touch is registered.
- Make sure the controls are always clean, dry, and that there is no object (e.g. a utensil or a cloth) covering them. Even a thin film of water may make the controls difficult to operate.

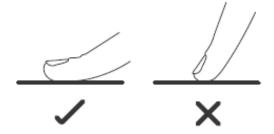

Choosing the right Cookware



- Only use cookware with a base suitable for induction cooking.
 Look for the induction symbol on the packaging or on the bottom
 - of the pan.
- You can check whether your cookware is suitable by carrying out a magnet test.
 Move a magnet towards the base of the pan. If it is attracted, the pan is suitable

for induction.


- If you do not have a magnet:
 - 1. Put some water in the pan you want to check.
 - 2. If Udoes not flash in the display and the water is heating, the pan is suitable.
- Cookware made from the following materials is not suitable: pure stainless steel, aluminium or copper

without a magnetic base, glass, wood, porcelain, ceramic, and earthenware.


Do not use cookware with jagged edges or a curved base.




Make sure that the base of your pan is smooth, sits flat against the glass, and is the same size as the cooking zone. Use pans whose diameter is as large as the graphic of the zone selected. Using a pot a slightly wider energy will be used at its maximum efficiency. If you use smaller pot efficiency could be less than expected. Pot less than 140 mm could be undetected by the hob. Always centre your pan on the cooking zone.

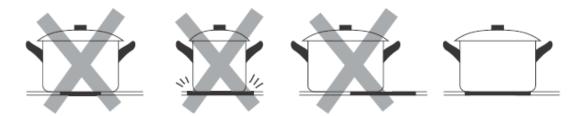

Always lift pans off the Induction hob – do not slide, or they may scratch the glass.





Start cooking

Otart Cooking	
Touch the ON/OFF control for three seconds. After power on, the buzzer beeps once, all displays show "—" or "——", indicating that the induction hob has entered the state of standby mode.	
Place a suitable pan on the cooking zone that you wish to use. • Make sure the bottom of the pan and the surface of the cooking zone are clean and dry.	
Touching the heating zone selection control ,and an indicator next to the key will flash	}- €
Select a heat setting by touching the "-" or "+" control. • If you don't choose a heat setting within 1 minute, the Induction hob will automatically switch off. You will need to start again at step 1. • You can modify the heat setting at any time during cooking.	(I)

If the display flashes $\geq \frac{\Box}{2} \leq$ alternately with the heat setting

This means that:

- you have not placed a pan on the correct cooking zone or,
- the pan you're using is not suitable for induction cooking or,
- the pan is too small or not properly centered on the cooking zone.

No heating takes place unless there is a suitable pan on the cooking zone. The display will automatically turn off after 1 minute if no suitable pan is placed on it.

Finish cooking

1 Illion cooking	
Touching the heating zone selection control that you wish to switch off	5
Turn the cooking zone off by scrolling down to "0" or touching "-" and "+" control together. Make sure the display shows "0".	OR #
Turn the whole cooktop off by touching the ON/OFF control.	
Beware of hot surfaces H will show which cooking zone is hot to touch. It will disappear when the surface has cooled down to a safe temperature. It can also be used as an energy saving function if you want to heat further pans, use the hotplate that is still hot.	ОН

Locking the Controls

- You can lock the controls to prevent unintended use (for example children accidentally turning the cooking zones on).
- When the controls are locked, all the controls except the ON/OFF control are disabled.

To lock the controls					
Touch the lock control	The timer indicator will show "Lo "				
To unlock the controls					
Touch and hold the lock control for 2 seconds.					



When the hob is in the lock mode, all the controls are disable except the ON/OFF (), you can always turn the induction hob off with the ON/OFF () control in an emergency, but you shall unlock the hob first in the next operation.

Timer control

You can use the timer in two different ways:

- a) You can use it as a minute minder. In this case, the timer will not turn any cooking zone off when the set time is up.
- b) You can set it to turn one or more cooking zones off after the set time is up. The timer of maximum is 99 min.

a) Using the Timer as a Minute Minder If you are not selecting any cooking zone

Make sure the cooktop is turned on. Note: you can use the minute minder even if you're not selecting any cooking zone. Touch "+" the controls of the timer. The minder	ID S
indicator will start flashing and "10" will show in the timer display.	
Set the time by touching the "-" or "+" control of the timer Hint: Touch the "-" or "+" control of the timer once to decrease or increase by 1 minute. Touch and hold the "-" or "+" control of the timer to decrease or increase by 10 minutes.	(1)
Touching the "-" and "+" together, the timer is cancelled, and the "00" will show in the minute display.	→ 00 ⊙
When the time is set, it will begin to count down immediately. The display will show the remaining time and the timer indicator will flash for 5 seconds.	35 O
Buzzer will beep for 30 seconds and the timer indicator shows "" when the setting time finished.	🕓

b) Setting the timer to turn one cooking zone off

Set one zone	
Touching the heating zone selection control that you want to set the timer for. (e.g. zone 3#)	5
Touch timer control, the minder indicator will start flashing and "10" will show in the timer display.	
Set the time by touching the or control of the timer Hint: Touch the "-" or "+" control of the timer once will decrease or increase by 1 minute. Touch and hold the "-" or "+" control of the timer will decrease or increase by 10 minutes.	⊕
Touching the "-" and "+" together, the timer is cancelled, and the "00" will show in the minute display.	
When the time is set, it will begin to count down immediately. The display will show the remaining time and the timer indicator flash for 5 seconds. NOTE: The red dot next to power level indicator will	35 (
illuminate indicating that zone is selected.	<i>Б</i> _∺ O
When cooking timer expires, the corresponding cooking zone will be switched off automatically.	🕓



Other cooking zone will keep operating if they are turned on previously.

Default working times

Auto shut down is a safety protection function for your induction hob. It will shut down automatically if ever you forget to turn off your cooking. The default working times for various power levels are shown in the below table:

Power level	1	2	3	4	5	6	7	8	9
Default working timer (hour)	8	8	8	4	4	4	2	2	2

When the pot is removed, the induction hob can stop heating immediately and the hob will automatically switch off after 2 minutes.



People with a heart pace maker should consult with their doctor before using this unit.

COOKING GUIDELINES



Take care when frying as the oil and fat heat up very quickly. At extremely high temperatures oil and fat will ignite spontaneously and this presents a serious fire risk.

Cooking Tips

- When food comes to the boil, reduce the temperature setting.
- Using a lid will reduce cooking times and save energy by retaining the heat.
- Minimize the amount of liquid or fat to reduce cooking times.
- Start cooking on a high setting and reduce the setting when the food has heated through.

Simmering, cooking rice

- Simmering occurs below boiling point, at around 85°C, when bubbles are just rising occasionally
 to the surface of the cooking liquid. It is the key to delicious soups and tender stews because
 the flavours develop without overcooking the food. You should also cook egg-based and flour
 thickened sauces below boiling point.
- Some tasks, including cooking rice by the absorption method, may require a setting higher than the lowest setting to ensure the food is cooked properly in the time recommended.

Searing steak

To cook juicy flavorsome steaks:

- 1. Stand the meat at room temperature for about 20 minutes before cooking.
- 2. Heat up a heavy-based frying pan.
- 3. Brush both sides of the steak with oil. Drizzle a small amount of oil into the hot pan and then lower the meat onto the hot pan.
- 4. Turn the steak only once during cooking. The exact cooking time will depend on the thickness of the steak and how cooked you want it. Times may vary from about 2 8 minutes per side. Press the steak to gauge how cooked it is the firmer it feels the more 'well done' it will be.
- 5. Leave the steak to rest on a warm plate for a few minutes to allow it to relax and become tender before serving.

For stir-frying

- 1. Choose an induction compatible flat-based wok or a large frying pan.
- 2. Have all the ingredients and equipment ready. Stir-frying should be quick. If cooking large quantities, cook the food in several smaller batches.
- 3. Preheat the pan briefly and add two tablespoons of oil.
- 4. Cook any meat first, put it aside and keep warm.
- 5. Stir-fry the vegetables. When they are hot but still crisp, turn the cooking zone to a lower setting, return the meat to the pan and add your sauce.
- 6. Stir the ingredients gently to make sure they are heated through.
- 7. Serve immediately.





COOKING GUIDELINES

Detection of Small Articles

When an unsuitable size or non-magnetic pan (e.g. aluminium), or some other small item (e.g. knife, fork, key) has been left on the hob, the hob automatically go on to standby in 1 minute. The fan will keep cooking down the induction hob for a further 1 minute.

5. Heat Settings

The settings below are guidelines only. The exact setting will depend on several factors, including your cookware and the amount you are cooking. Experiment with the induction hob to find the settings that best suit you.

Heat setting	Suitability
1 - 2	delicate warming for small amounts of food
	melting chocolate, butter, and foods that burn quickly
	• gentle simmering
	• slow warming
3 - 4	• reheating
	rapid simmering
	• cooking rice
5 - 6	• pancakes
7 - 8	• sautéing
	cooking pasta
9	• stir-frying
	• searing
	bringing soup to the boil
	boiling water

CLEANING AND MAINTANENCE

What?	How?	Important!
Everyday soiling on glass (fingerprints, marks, stains left by food or non- sugary spillovers on the glass)	1. Switch the power to the cooktop off. 2. Apply a cooktop cleaner while the glass is still warm (but not hot!) 3. Rinse and wipe dry with a clean cloth or paper towel. 4. Switch the power to the cooktop back on.	 When the power to the cooktop is switched off, there will be no 'hot surface' indication but the cooking zone may still be hot! Take extreme care. Heavy-duty scourers, some nylon scourers and harsh/abrasive cleaning agents may scratch the glass. Always read the label to check if your cleaner or scourer is suitable. Never leave cleaning residue on the cooktop: the glass may become stained.
Boilovers, melts, and hot sugary spills on the glass	Remove these immediately with a fish slice, palette knife or razor blade scraper suitable for Induction glass cooktops, but beware of hot cooking zone surfaces: 1. Switch the power to the cooktop off at the wall. 2. Hold the blade or utensil at a 30° angle and scrape the soiling or spill to a cool area of the cooktop. 3. Clean the soiling or spill up with a dish cloth or paper towel. 4. Follow steps 2 to 4 for 'Everyday soiling on glass' above.	 Remove stains left by melts and sugary food or spillovers as soon as possible. If left to cool on the glass, they may be difficult to remove or even permanently damage the glass surface. Cut hazard: when the safety cover is retracted, the blade in a scraper is razor-sharp. Use with extreme care and always store safely and out of reach of children.

CLEANING AND MAINTANENCE

Spillovers on the	Switch the power to the cooktop off.	The cooktop may beep and turn
touch controls		itself off, and the touch controls
	2. Soak up the spill	
		may not function while there is
	3. Wipe the touch control area with a clean damp sponge or cloth.	liquid on them. Make sure you wipe the touch control area dry before
	4. Wipe the area completely dry	turning the cooktop back on.
	with a paper towel.	
	5. Switch the power to the cooktop back on.	

HINTS AND TIPS

Problem	Possible causes	What to do
The induction hob	No power.	Make sure the induction hob is
cannot be turned on.		connected to the power supply
		and that it is switched on.
		Check whether there is a power
		outage in your home or area. If
		you've checked everything and the problem persists, call a qualified
		technician.
The touch controls are	The controls are locked.	Unlock the controls. See section
unresponsive.		'Using your induction cooktop' for instructions.
The touch controls are difficult to operate.	There may be a slight film of	Make sure the touch control area is
	water over the controls or you	dry and use the ball of your finger when touching the controls.
	may be using the tip of your	
	finger when touching the	
	controls.	
The glass is being scratched.	Rough-edged cookware.	Use cookware with flat and smooth bases. See 'Choosing the right cookware'.
		See 'Care and cleaning'.
	Unsuitable, abrasive scourer or	
	cleaning products being used.	
Some pans make	This may be caused by the	This is normal for cookware and
crackling or clicking noises.	construction of your cookware	does not indicate a fault.
	(layers of different metals	
	vibrating differently).	

HINTS AND TIPS

The induction hob makes a low humming noise when used on	This is caused by the technology of induction cooking.	This is normal, but the noise should quieten down or disappear completely when you decrease the heat setting.
a high heat setting.		
Fan noise coming from the induction hob.	A cooling fan built into your induction hob has come on to prevent the electronics from	This is normal and needs no action. Do not switch the power to the induction hob off at the wall while the fan is running.
	overheating. It may continue to	
	run even after you've turned the	
	induction hob off.	
Pans do not become hot and appears in the display.	The induction hob cannot detect the pan because it is not suitable for induction cooking.	Use cookware suitable for induction cooking. See section 'Choosing the right cookware'.
	The induction hob cannot detect the pan because it is too small for the cooking zone or not properly centred on it.	Centre the pan and make sure that its base matches the size of the cooking zone.
The induction hob or a cooking zone has	Technical fault.	Please note down the error
turned itself off		letters and numbers, switch
unexpectedly, a tone		the power to the induction hob
sounds and an error code is displayed		off at the wall, and contact a
(typically alternating with one or two digits in the cooking timer display).		qualified technician.

fomegaappliances

FAILURE AND DISPLAY AND INSPECTION

The induction hob is equipped with a self diagnostic function. With this test the technician is able to check the function of several components without disassembling or dismounting the hob from the working surface.

Troubleshooting

1) Failure code occur during customer using & Solution;

Failure code	Problem	Solution	
Auto-Recovery			
E1	Supply voltage is above the rated voltage.	Please inspect whether power supply is normal.	
E2	Supply voltage is below the rated voltage.	Power on after the power supply is normal.	
E3	High temperature of ceramic plate sensor . (1#)	Wait for the temperature of ceramic plate return to normal.	
E4	High temperature of ceramic plate sensor . (2#)	Touch "ON/OFF" button to restart unit.	
E5	High temperature of IGBT . (1#)	Wait for the temperature of IGBT return to normal.	
		Touch "ON/OFF" button to restart unit.	
E6	High temperature of IGBT. (2#)	Check whether the fan runs smoothly;	
		if not , replace the fan.	
	No Auto-Recove	ry	
F3/F6	Ceramic plate temperature sensor failureshort circuit. (F3 for 1#,F6 for2#)		
F4/F7	Ceramic plate temperature sensor failureopen circuit. (F4 for 1#,F7 for2#)	Check the connection or replace the ceramic plate temperature sensor.	
F5/F8	Ceramic plate temperature sensor failure—invalid . (F5 for 1#,F8 for2#)		
F9/FA	Temperature sensor of the IGBT failure. (short circuit/open circuit for 1#)	Replace the power board.	
FC /FD	Temperature sensor of the IGBT failure. (short circuit/open circuit for 2#)	Treplace the power boald.	

FAILURE AND DISPLAY AND INSPECTION

2) Specific Failure & Solution

Failure	Problem	Solution A	Solution B
The LED does not come on when unit is plugged in.	No power supplied.	Check to see if plug is secured tightly in outlet and that outlet is working.	
	The accessorial power board and the display board connected failure.	Check the connection.	
	The accessorial power board is damaged.	Replace the accessorial power board.	
	The display board is damaged.	Replace the display board.	
Some buttons can't work, or the LED display is not normal.	The display board is damaged.	Replace the display board.	
The Cooking Mode Indicator comes on, but heating does not start.	High temperature of the hob.	Ambient temperature may be too high. Air Intake or Air Vent may be blocked.	
	There is something wrong with the fan.	Check whether the fan runs	
		smoothly; if not , replace the fan.	
	The power board is damaged.	Replace the power board.	
Heating stops suddenly	Pan Type is wrong.	Use the proper pot (refer to the instruction	Pan detection circuit is damaged,
during operation and the display flashes " <u>u</u> ".	Pot diameter is too small.	manual.)	replace the power board.
	Cooker has overheated;	Unit is overheated. Wait for temperature to return to normal.	
		Push "ON/OFF" button to restart unit.	

FAILURE AND DISPLAY AND INSPECTION

Heating zones of the same side (Such as the first and the second zone) would display "u".	The power board and the display board connected failure;	Check the connection.	
Zone / Would dioplay & .	The display board of communicate part is damaged.	Replace the display board.	
	The Main board is damaged.	Replace the power board.	
Fan motor sounds abnormal.	The fan motor is damaged.	Replace the fan.	

The above are the judgment and inspection of common failures.

Please do not disassemble the unit by yourself to avoid electric shock, any dangers and damages to the induction hob.

DISPOSAL



DISPOSAL: Do not dispose this product as unsorted municipal waste. Collection of such waste separately for special treatment is necessary.

The symbol on the product indicates that it may not be treated as normal household waste. It should be taken to a collection point for the recycling of electrical and electronic goods.

This appliance requires specialist waste disposal. For further information regarding the treatment, recover and recycling of this product please contact your local council, your household waste disposal service, or the shop where you purchased it.

For more detailed information about treatment, recovery and recycling of this product, please contact your local city office, your household waste disposal service or the shop where you purchased the product.



AUSTRALIAN & NEW ZEALAND PRODUCT WARRANTY STATEMENT OF STANDARD WARRANTY CONDITIONS

AUSTRALIAN CUSTOMERS

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

NEW ZEALAND CUSTOMERS

Nothing herein contained shall be construed in any way as excluding or limiting your rights under the Consumer Guarantee Act 1993. OUR WARRANTY

This product is also covered by the manufacturer's warranty set out in this document (Our Warranty).

Our Warranty is for a period of twenty four (24) months from the date of purchase and for refrigeration appliances will have an additional thirty six (36) months after the first twenty four (24) months on the Sealed System (PARTS only) Compressor & condenser etc. The labour cost to replace these parts is the responsibility of the customer.

This is in addition to (and does not exclude, restrict or modify) any rights or remedies to which you may already be entitled to under the Australian consumer law or the New Zealand Consumer Guarantee act 1993 relating to this product.

Our warranty (which is subject to the conditions below) covers rectification free of charge of any fault arising from defective materials or components, or faulty workmanship. The product will be repaired or replaced at the option of Omega, and all costs of installation, removal, cartage, freight travelling and insurance are to be paid by the customer.

Our warranty is subject to the following conditions:

- 1. That the purchaser contact Omega prior to any product repair.
- 2. That the purchaser carefully follows all instructions provided with the product and complies with all relevant electrical & plumbing regulations in their State when installing the product.
- 3. That the purchaser carefully follows the instructions provided in the owner's handbook relating to the proper use and care of the product and does not use the product for any purpose other than the DOMESTIC use for which it has been designed. If the appliance is used in commercial applications or for rental purposes, Our Warranty is limited to a warranty of Twelve (12) months covering all parts with Three (3) months on any labour cost of service or repair.

SERVICE AREA

The provision of service under Our Warranty is limited by the boundary / territory area of the nearest service centre. Travelling cost incurred for service outside this area is not covered by Our Warranty and service will incur commercial cost to be paid by the customer regulated by the number of kilometres travelled beyond the service area. These costs will be disclosed to you for acceptance by you prior to your claim being processed.

Microwave ovens must be returned to your nearest Authorised Service Centre for repair as they are a carry in serviceable appliance.

WHAT IS COVERED: By Our Warranty

During the warranty period, Omega or its authorised Service Centre will, at no extra charge, if your appliance is readily accessible without the need of special equipment and subject to the terms and conditions of this warranty, repair or replace any parts which it considers defective.

WHAT IS NOT COVERED: By Our Warranty

- 1. Products installed damaged or incomplete or not in compliance with the relevant electrical & plumbing regulations in their State.
- 2. Normal wear and tear e.g. cleaning, light globes, filters etc.
- 3. Failure resulting from power surges and electrical storms.
- 4. Insect or vermin infestation.
- 5. Unauthorised repairs or use of non-genuine Omega parts.
- 6. Any failure caused by the product not being used in accordance with the instruction and the installation manual provided with the product.
- 7. Misuse or abuse, including failure to properly maintain or service.
- 8. The clearing of blockages in pumps and hoses.
- 9. Damage which occurs during delivery or installation.
- Claims to product surface coating due to liquid or solid spill-overs, accidental damage or damage caused from cleaning products not recommended by Omega.

HOW TO CLAIM OUR WARRANTY

Please refer to our website address below for Omega in Australia or New Zealand to register your warranty online.

IN AUSTRALIA

www.omegaappliances.com.au/customer/warranty Omega is division of Shriro Australia PTY LTD ABN 28 002 386 129

Customer care: 1300 739 033

IN NEW ZEALAND

www.omegaappliances.co.nz/customer Omega is division of Monaco Corporation Limited (Member of Shriro Australia PTY LTD) Phone (09) 415 6000

