





24.25"

Turning Radius

H mph

Maximum Speed Elevated and Non-Elevated

300lbs. Weight Capacity



Jazzy¹

Press, elevate and go!
The Jazzy Air® 2¹ elevates 12
inches at the touch of a button.
Feel empowered with this sleek
technology that allows you to
be face to face with your loved
ones. Drive at 4 mph while
elevated. It's the future of
mobility, and the future is yours.



GOOCHAIR®1

Compact. Bold. Endless possibilities. The Go Chair®1 is #1 for portability for easy disassembly in your fast-paced world. Enjoy under seat storage and complete comfort. Choose from six gorgeous colors and let your personality shine through.



Up To

B.2

Miles Per Charge at 200 lbs.

25.5"

Turning Radius

Up To

3.7mph

Maximum Speed

300lbs. Weight Capacity

FDA Class II Medical Device¹







Your destination awaits! Whether you are an avid jet setter to remote areas, or a train commuter to the big city, the Jazzy® Passport¹ folds and unfolds in just a few steps. Compact and lightweight for hassle-free travel, enjoy abundant storage and comfortable seating.

FDA Class II Medical Device¹



Blac

Access your world with ease with the Jazzy Select, a simple yet powerful choice, with a tight turning radius and smooth ride. Maneuver through your home effortlessly with the intuitive controller. Stay mobile and comfortable all day, every day.

Jazzy Red



Up To 19.4 Miles Per Charge

2.5"

Turning Radius

Up To

4.3mph

Maximum Speed

300lbs. Weight Capacity

FDA Class II Medical Device¹







Sporty. Sophisticated. Unique. The Jazzy Select® 6¹ offers superior suspension for powerful performance and stability. Experience a tight turning radius and a depth-adjustable seat. Life can be complicated, yet the Jazzy Select 6 is simple.

Jazzy Red

Jazzy Blue









An experience so superior, it can only be elite. The Jazzy® Elite ES¹ features large, front-drive wheels to absorb the bumps and uneven surfaces of everyday life. The comfortable, high-back seat gives you the support you need all day, every day.

FDA Class II Medical Device¹



Up To

13.5

Miles Per Charge

24.75"

Turning Radius

Up To **Up To**

300lbs.

Weight Capacity





Style and performance meet perfect portability. The Jazzy® Elite ES Portable¹ easily disassembles for transport and features large, front wheels to absorb everyday obstacles. An intuitive hand control and a comfortable, high-back seat add to the sophisticated appeal.

FDA Class II Medical Device¹



Viper Blue







An elite design delivers elite performance. The Jazzy® Elite 14¹ features front-wheel drive for the tightest turns. Large drive wheels provide superior climbing power over life's obstacles. A high-back seat ensures absolute comfort all day.







Life may be complicated, yet your power chair should be simple. The Jazzy® 600 ES¹ has 14-inch drive wheels and independent front casters that handle terrain changes easily. Enjoy aggressive precision, a tight turning radius and a flawless design.







The sleek and elegant Jazzy® Elite ES-1¹ delivers high-class maneuvering with front-wheel drive technology. Enjoy effortless controls and a comfortable, high-back seat on this power chair. Choose Jazzy every time.



Up To 12 Miles Per Charge

24.75"

Turning Radius

Up To Цmph

Maximum Speed

300lbs.

Weight Capacity





Jazzy

Experience the power and versatility of the Jazzy® Elite HD.¹ Large front wheels absorb and climb, easily tackling life's everyday obstacles. An intuitive hand control ensures effortless operation and simple maneuvering.

450lbs.







Power and precision combine into one exceptional power chair! The Jazzy® 614 HD¹ features outstanding suspension and a tight turning radius. Large drive wheels and six-inch casters tackle uneven terrain, no matter where your day takes you.

Viper Blue




Up To 15.7 Miles Per Charge 26.5" Turning Radius Up To **4.5**mph 600lbs. Weight Capacity



With a robust and heavy-duty design, the Jazzy® 1450¹ ensures powerful performance with front-wheel drive and efficient motors. Knobby drive tires provide the traction you need over uneven terrain. With speeds up to 4.5 mph, live life on your terms.





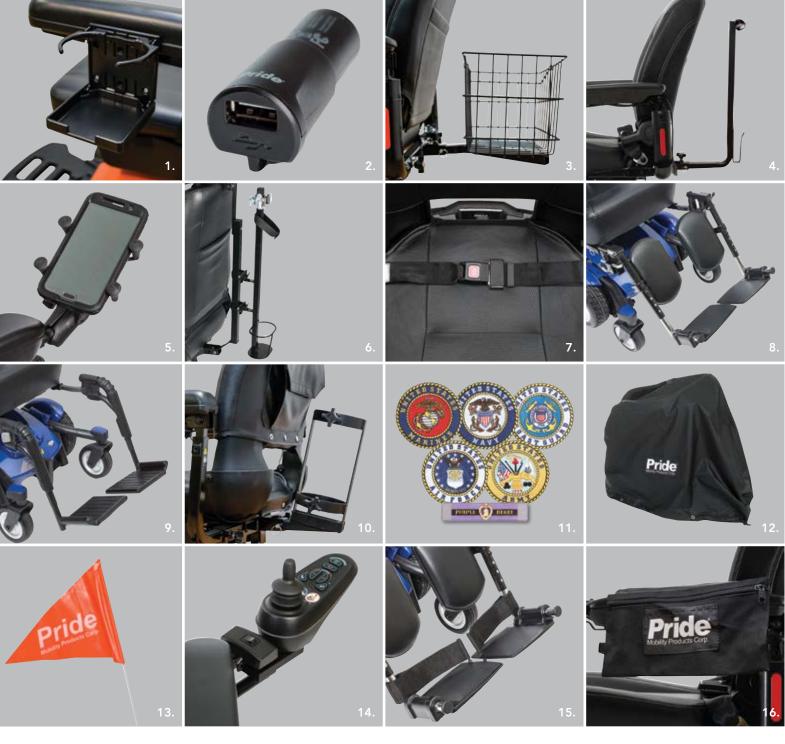

We take innovation to the next level with a wide variety of technologies and state-of-the-art development.

Mid-Wheel 6® Technology and Active-Trac® ATX Suspension allow the active front casters to lift when climbing a threshold or obstacle, while also dropping down for stability when descending.

In-line motors deliver enhanced torque, battery range and reliability for the most dependable performance.

Power elevated seating on the Jazzy Air® 2¹ features Extra Stability Technology®, mechanically stabilizing the power base, for ultimate security when driving at 4 mph while elevated.

FDA Class II Medical Device¹





FDA Class II Medical Device¹

1. Cup Holder | 2. XLR USB Charger | 3. Rear Basket | 4. Walker Holder | 5. Cell Phone Holder | 6. Cane/Crutch Holder 7. Lap Belt | 8. Elevating Legrests | 9. Swing-Away Legrests | 10. Oxygen Tank Holder | 11. Military Patches | 12. Weather Cover 13. Safety Flag | 14. Swing-Away Joystick | 15. Heel Loops | 16. Saddle Bag

	NON-CODED*			CODED			
MODEL NAME	JAZZY AIR® 21	JAZZY® PASSPORT¹	GO CHAIR®1	JAZZY® ELITE ES-11	JAZZY® ELITE ES PORTABLE¹	JAZZY® ELITE ES¹	
WEIGHT CAPACITY	300 lbs.	250 lbs.	300 lbs.	300 lbs.	300 lbs.	300 lbs.	
TURNING RADIUS ³	24.25"	24.25"	25.5"	24.75"	24.75"	24.75"	
OVERALL LENGTH/WIDTH ³	42" / 25.25"	40" / 23.5"	28.5" / 22.5"	34.75" / 22.75"	34.75" / 22.75"	34.75" / 22.75"	
MAXIMUM SPEED ¹¹	Up to 4 mph (elevated and non-elevated)	Up to 3.6 mph	Up to 3.7 mph	Up to 4 mph	Up to 4 mph	Up to 4 mph	
GROUND CLEARANCE ³	1"	3"	1.75"	1.5"	1.5"	1.5"	
FRONT WHEELS	6" solid	8" solid casters	6" solid casters	5" solid anti-tips	3" solid anti-tips	3" solid anti-tips	
DRIVE WHEELS	10" solid	12" pneumatic	9" solid	9" solid	9" solid	9" solid	
REAR WHEELS	6" solid	N/A	3" solid anti-tips	6" solid casters	6" solid casters	6" solid casters	
DRIVETRAIN	Two-motor, Mid-Wheel 6 [®] drive	Two-motor, rear-wheel drive	Two-motor, rear-wheel drive	Two-motor, in-line, front- wheel drive	Two-motor, in-line, front- wheel drive	Two-motor, in-line, front- wheel drive	
BRAKING SYSTEM	Regenerative and electro-mechanical	Regenerative and electro-mechanical	Regenerative and electro-mechanical	Regenerative and electro-mechanical	Regenerative and electro-mechanical	Regenerative and electro-mechanical	
SUSPENSION	Active-Trac® (ATX) with Mid-Wheel 6® Technology	Limited	Limited	Limited	Limited	Limited	
HIGH-BACK SEAT (MAX. SIZE)	20"W x 20"-22"D	N/A	N/A	20" W x 20" D	20" W x 20" D	20" W x 20" D	
HIGH-BACK SEAT-TO-FLOOR RANGE	21.25" - 33"	19"	N/A	21.5" - 23.5"	21.5" - 23.5"	21.5" - 23.5"	
SYNERGY® SEATING	N/A	N/A	N/A	N/A	N/A	N/A	
SYNERGY® SEAT SEAT-TO-FLOOR RANGE	N/A	N/A	N/A	N/A	N/A	N/A	
POWER ELEVATING SEAT 6	Standard	N/A	N/A	N/A	N/A	N/A	
STANDARD ELECTRONICS	40A, PG VR2	50A, PG VSI	40A, PG GC3	40A, PG GC3	40A, PG GC3	40A, PG GC3	
BATTERY SIZE ⁵	(2) 12 volt, U-1 (std.), 40 AH (optional)	(1) 25.2V 18 AH lithium ion, (1) 25.2V 10.4 AH lithium ion travel battery	(2) 18 AH	(2) U-1	(2) U-1	(2) U-1	
STANDARD BATTERY CHARGER	Off-board, 5 amp	Off-board, 2 amp	Off-board, 2 amp	Off-board, 3.5 amp	Off-board, 3.5 amp	Off-board, 3.5 amp	
RANGE PER CHARGE 2,11	Up to 16.8 miles (U-1) Up to 19.2 miles (40 AH)	Up to 9.6 miles at 250 lbs. (18AH), Up to 5.7 miles at 250 lbs. (10.4 AH) Up to 11 miles at 200 lbs. (18AH) Up to 6.3 miles at 250 lbs. (10.4 AH)	Up to 8.7 miles at 300 lbs. Up to 13.2 miles at 200 lbs.	Up to 12 miles	Up to 11 miles	Up to 13.5 miles	
BATTERY WEIGHT⁴	24.5 lbs. each (U-1) 32.5 lbs. each (40 AH)	7.6 lbs.(18AH), 5.2 lbs. (10.4AH travel battery)	14 lbs. each	25 lbs. each	25 lbs. each	25 lbs. each	
WEIGHT OF HEAVIEST PIECE ³	202 lbs. (with seat)	54 lbs. (unit doesn't disassemble) ⁷	36 lbs.	69 lbs.	48 lbs.	69 lbs.	
STANDARD SEAT WEIGHT	41 lbs.	N/A	30 lbs. (compact foldable)	43 lbs. (comfort, high-back)	43 lbs. (comfort, high-back)	43 lbs. (comfort, high-back)	
STANDARD SEAT SIZE	16" x 16"-18", 18" x 18"- 20", 20" x 20"-22"	17.5" x 16.5"	18" x 17"	16" x 16"-18", 18" x 18"- 20", 20" x 18"-20"	16" x 16"-18", 18" x 18 - 20", 20" x 18"-20"	16" x 16"-18", 18" x 18"- 20", 20" x 18" -20"	
HCPCS CODES	K0899	K0899	K0899	Group 1: Standard K0816	Group 2: Standard, Portable (K0820/K0821)	Group 2: Standard (K0822/K0823)	
WARRANTY	Frame: 5-year limited Drive motors: 13-month Electronics: 13-month Batteries: 13-month	Frame: 5-year limited Drive motors: 13-month Electronics: 13-month Batteries: 13-month	Frame: 5-year limited Drive motors: 13-month Electronics: 13-month Batteries: 13-month	Frame: 5-year limited Drive motors: 13-month Electronics: 13-month Batteries: 13-month	Frame: 5-year limited Drive motors: 13-month Electronics: 13-month Batteries: 13-month	Frame: 5-year limited Drive motors: 13-month Electronics: 13-month Batteries: 13-month	

			CODED			
JAZZY SELECT®1	JAZZY SELECT® 61	JAZZY® ELITE 141	JAZZY® 600 ES¹	JAZZY® ELITE HD¹	JAZZY® 614 HD¹	JAZZY® 1450¹
300 lbs.	300 lbs.	300 lbs.	300 lbs.	450 lbs.	450 lbs.	600 lbs.
22.5"	21.875"	24"	20.5"	24"	22.75"	26.5"
44" / 22.75"	35.5" / 23.5"	35.5" / 24.25"	35.5" / 24.5"	35.5" / 24.25"	35.5" / 25.25"	38.25" / 29.25"
Up to 4.3 mph	Up to 4 mph	Up to 4 mph	Up to 4 mph	Up to 4 mph	Up to 4.25 mph	Up to 4.5 mph
1.5"	1.75"	3"	2.75"	3"	2.25"	1.5"
5" solid anti-tips	6" solid casters	3" solid anti-tips	6" solid OMNI-casters	3" solid anti-tips	6" solid casters	4" solid anti-tips
10" solid	10" solid	14" foam filled	14" foam filled	14" foam filled	14" foam filled	14" solid
6" solid casters	6" solid casters	6" solid casters	6" solid OMNI-casters	6" solid casters	6" solid casters	9" solid casters
Two-motor, mid-wheel drive	Two-motor, in-line, mid-wheel drive	Two-motor, front-wheel drive	Two-motor, mid-wheel drive	Two-motor, in-line, front- wheel drive	Two-motor, in-line, Mid-Wheel 6® drive	Two-motor, front-wheel drive
Regenerative and electro-mechanical	Regenerative and electro-mechanical					
Active-Trac® (ATX)	Active-Trac® (ATX)	Limited	Active-Trac® (ATX)	Limited	Active-Trac® (ATX)	Swing Arm
20"W x 20"D	20"W x 20"D	20"W x 20"D	20" W x 20" D	24" W x 24" D	24" W x 24" D	26" W x 22" D
21"- 22"	21.25" - 23.25"	20"- 22"	20.5" - 22.5"	20" - 22"	20.5" - 23.5"	20.5" - 22.5"
20"W x 20"D	20"W x 20"D	20"W x 20"D	20"W x 20"D	24"W x 24"D	24" W x 24" D	32" W x 28" D
17.25" - 19.25"	16.5" - 18.5"	15.75" - 17.75"	17.25" - 19.25"	15.75" - 17.75"	17.75" - 19.75"	17.25" - 19.25"
N/A	Optional	N/A	N/A	N/A	N/A	N/A
40A, PG GC3	40A, PG GC3 ⁸	50A, Dynamic Shark	50A, Dynamic Shark	60A, Dynamic Shark	50A, Dynamic Shark	90A, PG VR2
(2) U-1	(2) U-1	(2) NF-22	(2) NF-22	(2) NF-22	(2) NF-22	(2) Group 24
Off-board, 3.5 amp	Off-board, 3.5 amp	Off-board, 5 amp	Off-board, 5 amp	Off-board, 5 amp	Off-board, 5 amp	Off-board, 8 amp
Up to 19.4 miles	Up to 15 miles	Up to 9.8 miles	Up to 17 miles	Up to 9.8 miles	Up to 11 miles	Up to 15.7 miles
25.2 lbs. each	25 lbs. each	37 lbs. each	37 lbs. each	37 lbs. each	37 lbs. each	52 lbs. each
94 lbs.	97.4 lbs.	99 lbs.	124 lbs.	99 lbs.	122 lbs.	195 lbs.
51.4 lbs. (comfort, high-back)	43 lbs. (comfort, high-back)	52 lbs. (high-back)	52 lbs. (high-back)	52 lbs. (high-back)	52 lbs. (high-back)	52 lbs. (high-back)
16" x 16"- 18", 18" x 18"- 20", 20" x 18"-20"	16" x 16"- 18", 18" x 18"- 20", 20" x 18"-20"	18" x 18"- 20", 20" x 18"- 20", 22" x 20"-22"	18" x 18" - 20", 20" x 20" - 18"	20" x 18" - 20", 22" x 20" - 22"	20" x 18" - 20", 22" x 20" - 22"	24" x 24"
Group 2: Standard (K0822/K0823)	Group 2: Standard (K0822/K0823)	Group 2: Standard (K0822/K0823)	Group 2: Standard (K0822/K0823)	Group 2: Heavy Duty (K0824/K0825)	Group 2: Heavy Duty (K0824/K0825)	Group 2: Very Heavy Duty (K0826/K0827), Single Power Very Heavy Duty (K0839
Frame: 5-year limited Drive motors: 13-month Electronics: 13-month Batteries: 13-month	(See Footnote 9 on back page					







Note: Transport of the Jazzy® Passport item on commercial aircraft is subject to federal regulations and airline policy. Please consult your airline prior to your flight to ensure your Jazzy® Passport and its lithium-ion battery are permitted.

- 1 Jazzy® Power Chairs are FDA Class II Medical Devices designed to aid individuals with mobility impairments.
- 2 Tested in accordance with ANSI/RESNA, MC Vol2, Section 4 & ISO 7176-4 standards. Results derived from theoretical calculations based on battery specifications and drive system performance. Test conducted at maximum weight capacity.
- 3 Due to manufacturing tolerances and continual product improvement, this specification can be subject to a variance of (+ or -) 3%.
- 4 Battery weight may vary based on battery manufacturer.
- 5 AGM or gel cell type required.
- 6 Maximum weight capacity is reduced to 400 lbs. (181 kg) on 18" deep seat configurations.
- 7 Seat weight included. Unit does not disassemble.
- 8 40A, PG 6-key VR2 required with power elevating seat option.
- 9 K0826/K0827 Models: Lifetime limited on frame; 13-month limited on electronics; 13-month limited on drive motors; 13-month on batteries. K0839 Model: Lifetime limited on frame; 2-year limited on electronics; 18-month limited on drive motors; 13-month on batteries.
- 10 Not all accessories are available for all products. Please speak with your Provider for details and availability.
- 11 Varies with user weight, terrain type, battery amp-hour (AH), battery charge, battery condition, and tire condition. This specification can be subject to a variance of (+ or -) 10%.

NOTE: All specifications subject to change without notice.

The information contained herein is correct at the time of publication; we reserve the right to alter specifications without prior notice. Speed and range vary with user weight, terrain type, battery charge, battery condition and tire pressure. Due to manufacturing tolerances and continual product improvement, length, width, turning radius and ground clearance can be subject to variance of + or - 3 %. Dimensions listed are for power chair only. Overall measurements will vary based on seating and accessory selections.

HCPCS codes provided should not be considered as legal advice and do not guarantee reimbursement. DME providers are responsible for determining appropriate billing codes when submitting for insurance reimbursement.

*Not coded by DME PDAC.

