



OSGIKEN Corvette Release Sleeve Set Installation Manual






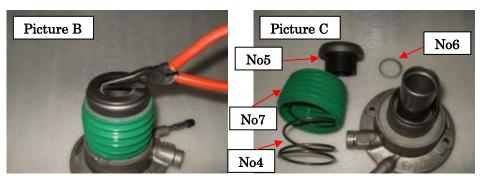









Enclosed Items in the Kit (Picture H)

- Return Spring (No1)
- Release Sleeve Stopper (No2)
- Release Sleeve Bearing (No3)

Installation

- 1. Remove genuine direct release sleeve assembly from your vehicle (See Picture A).
- 2. Remove genuine release sleeve stopper (No6) to disassemble the direct release sleeve assembly (See Picture B and C). You do not need genuine return spring (No4), release sleeve bearing (No5) and release sleeve stopper (No6) for this installation.
- 3. Install OS return spring (No1) instead of genuine return spring (No4) (See Picture D).
- 4. Install genuine boot cover assembly (No7), OS sleeve bearing (No3) and release sleeve stopper (No2) (See Picture F)
- 5. Make sure that the stopper is properly installed (See Picture F).
- 6. OS release sleeve set installation is completed (Picture G) and install the direct release sleeve assembly to original location.

General Warning

- XCheck to see if all the parts are enclosed.
- ** Please be aware of potential risks and hazards when installing our products. We do not take any responsibility for any loss and/or injury occurred when our products are modified, re-used and/or ill-fitted.
- *Spray aerosol lubricant to the appropriate surface of the moving parts. Periodical lubrication is recommended.
- XAII information on this sheet is based on Japanese model vehicle and may not be applied to vehicles in your country.
- *Specification may be changed without notice.

