
Pomona®

Model 3030 Miniature Double Banana Plug Shorting Bar

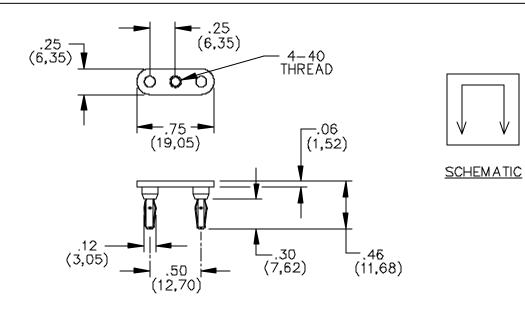

FEATURES:

- Low profile 1.6 (.062) thick brass shorting bar.
- Center hole accepts #4-40 screw, for easy removal.
- Mates to Model # 2143 or any miniature double banana jack.

MATERIALS:

Shorting Bar:

Material: Brass per QQ-B-613, composition 2, ¹/₂ Hard.

Finish: Gold plated per MIL-G-45204, Type II, Class 00 over electroless nickel per MIL-C-26074, 200/300 microinches.

Miniature Double Banana Plug:

Spring:

Material: Beryllium Copper per QQ-C-533, Alloy C172, Cond. HT.

Finish: Gold plated per MIL-G-45204, Type II, Class 00 over electroless nickel per MIL-C-26074, 200/300 microinches.

RATINGS:

Current: 5 Amperes Resistance: Resistance less than 1.5 milliohms.

ORDERING INFORMATION: Model 3030

All dimensions are in inches. Tolerances (except noted): $.xx = \pm.02$ " (,51 mm), $.xxx = \pm.005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

6/9/99	Sales: 800-490-2361 Fax: 888-403-3360
SY/EH/LS	Technical Assistance: 800-241-2060
S:\Engineering\Release\DataSheets\FlukeDataSheet\d3030_1_01.doc	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pomona: 3030