

ASSEMBLY AND INSTALLATION INSTRUCTIONS


PD38834

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.

Installation Steps

1. Attach the nipple-1 to the mounting strap, and then secure with a washer and a hex nut.
2. Attach the mounting strap to the ceiling box by using two mounting screws.
3. Choose two certain same length of the chains you need, and then weave the fixture wires and the grounding wire through the chain links. Then connect one end links of the chains with the loops-2 by using the loop locks.
4. Secure the loops-2 onto the nipples-2.
5. Thread the fixture wires and grounding wire through the loops-1 and canopy in order.
6. Connect the other end links of the chains with the loops-1 by using the loop lock.
7. Make wire connections with wire nuts:
 - The two smooth wires (marked) from fixture to the black wire from power source.
 - The two ridged wires (unmarked) from fixture to the white wire from power source.
 - Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with the wire nut.Carefully tuck wires back into the ceiling box.
8. Attach the canopy to the mounting strap by inserting the nipple-1, and then secure with the finial.
9. Place the glass shades into the decoration ring carefully, attach them upwards to the glass holders, and then secure with the socket rings.
10. Install bulbs. **(Please do not exceed the maximum capacity that is recommended on the package.)**
11. Turn on the power at fuse or circuit box.

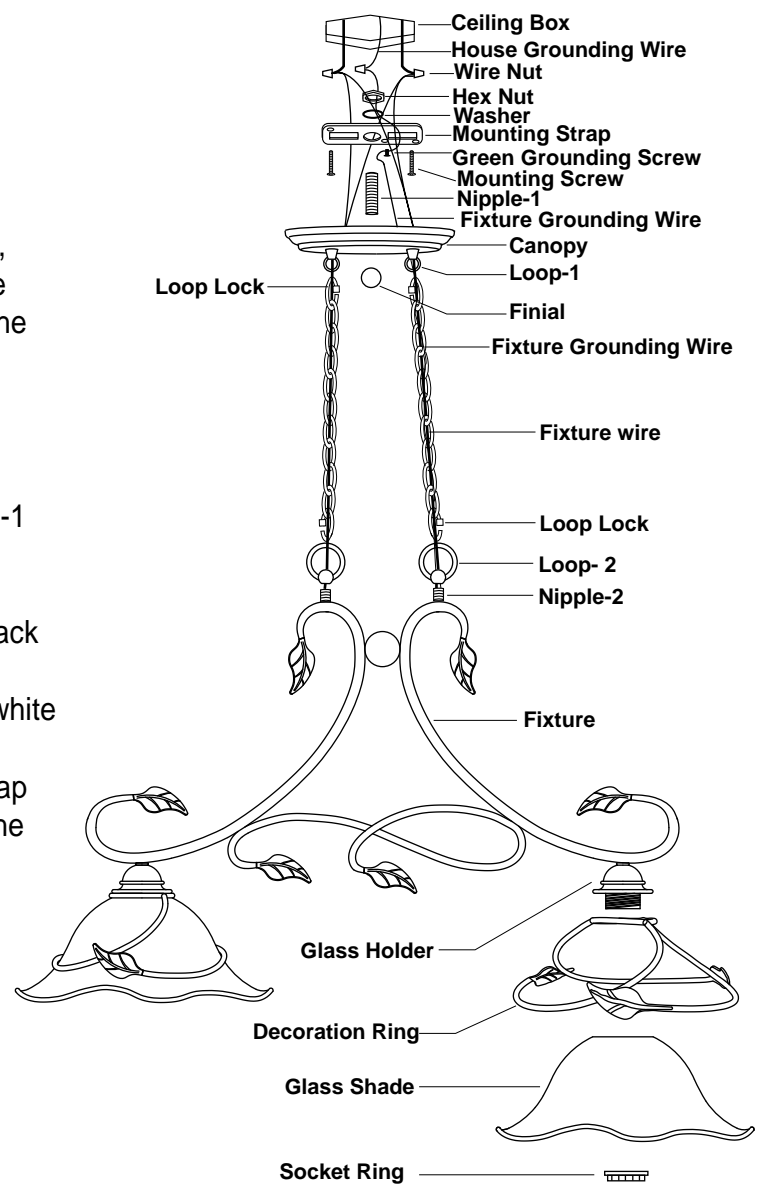

VAXCEL
LIGHTING

050626