

Cattleman®

 **BEKAERT**

better together




High Strength Barbed Wire


The strongest barbed wire available.

An unequaled replacement for old fashioned 12 1/2 gauge low carbon barbed wire. Our reverse twist design and higher strength steel reduce maintenance and give you a nominal breaking strength the is over 30% higher (1,400 Pounds) than any other barbed wire.

Wire Strength

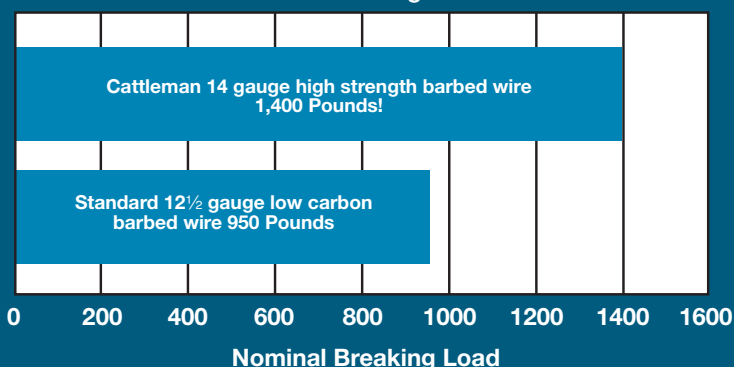

Corrosion Resistance

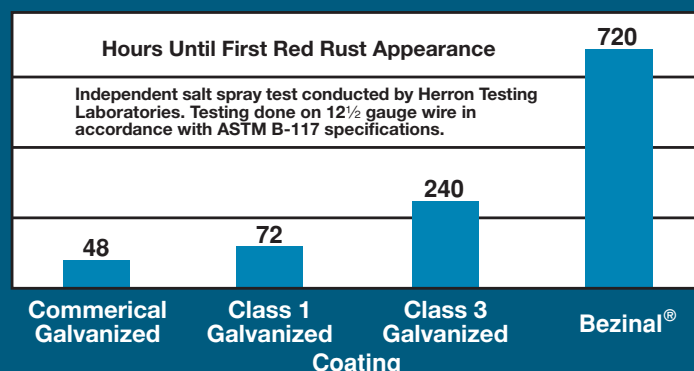

Cattleman 14 gauge high tensile barbed wire offers two coating options for superior corrosion protection. The standard coating on Cattleman is our Class 3 (Heavy Galvanized) coat, which contains over 3.37 pounds of zinc per reel. Almost 3 times the amount found on a 12.5g low carbon barbed wire. The second coating option for Cattleman is our new Bezinal® (Zn + Al) + Paint Coating. This coating gives you a great looking green top coat and a corrosion resistance than exceeds even our Class 3 galvanized.

EASY INSTALLATION

No Pre-Stretching Required - Just Pull Tight!
Unlike 12.5g conventional barbed wire simply pull to the proper tension and the wire will remain tight. No more sagging or stretching.



SPECIFICATIONS

Type/ Number of Barbs	4-Point	2-Point
Spacing Between Barbs	5"	5"
Line Wire Diameter	14 gauge	14 gauge
Barb Diameter	14 gauge	14 gauge flat
Weight Per Reel	64 Lbs.	56 Lbs.
Length Per Reel	1,320'	1,320'
Nominal Breaking Load	1,400 Lbs.	1,400 Lbs.
Reels Per Pallet	27	36
Class 3 Part#	134936	135137
Green Label™ Part#	135464	135463
Reels are packaged on a wooden pallet with a clear plastic shrink wrap that keeps wire clean and looking new.		



For More Information Contact
Bekaert Corporation at:
(800) 241-4126 x 2272
www.bekaert.com/na

