

(800)736-2114




PARTS LIST:

- 1- Exhaust Canister
- 1- Servo Eliminator (21-1002)
- 1- 6x16 Allen Bolt
- 1- 6mm Washer
- 1- 6mm Nyloc Nut

<<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>>

SCRAMBLER-DUCATI 1100 Slip-on Exhaust

- 1) Remove seat.
- 2) Remove exhaust valve cable from pipe *FIG (A) and from servo motor *FIG (B). Set cable aside.
- 3) Remove servo motor (2- allen bolts) *FIG (B). Snip zip-tie and unplug. *FIG (C)
- 4) Install Servo Eliminator.
- 5) Remove stock exhaust canisters (1- bolt per side).
- 6) Remove stock exhaust mounting bracket.
- 7) Remove stock Y-pipe (2- bolts, 1- clamp).
- 8) Remove catalytic converter (1- bolt, 1- spring).
- 9) Install WerkesUSA Canister (use stock spring, and supplied 6mm bolt, washer, and nut). *FIG (D)
- 10) Replace seat.
- 11) Clean exhaust with WD-40 (or similar) before starting.

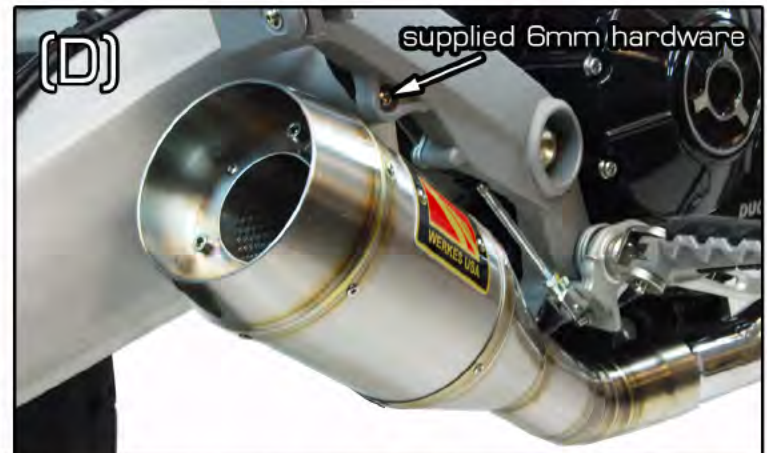

****IMPORTANT**** To insure uniform coloring thoroughly clean with WD-40 or like product before starting motorcycle ****IMPORTANT****

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.

WDSCR3