
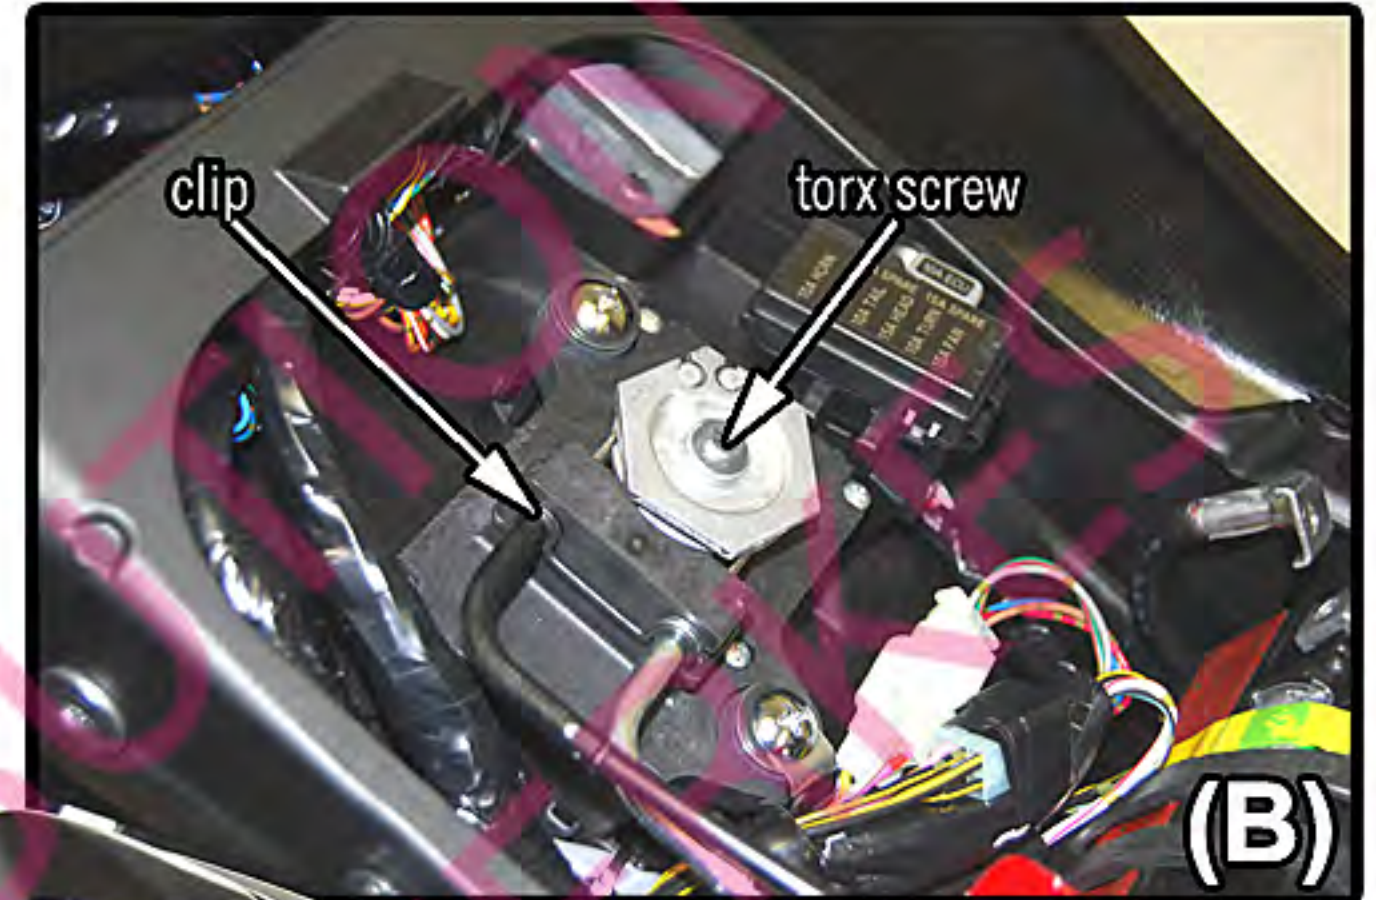


&lt;&lt;&lt;&lt;&lt; IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN &gt;&gt;&gt;&gt;&gt;

# 09 Kawasaki ZX6r

## GP Slip-on Exhaust

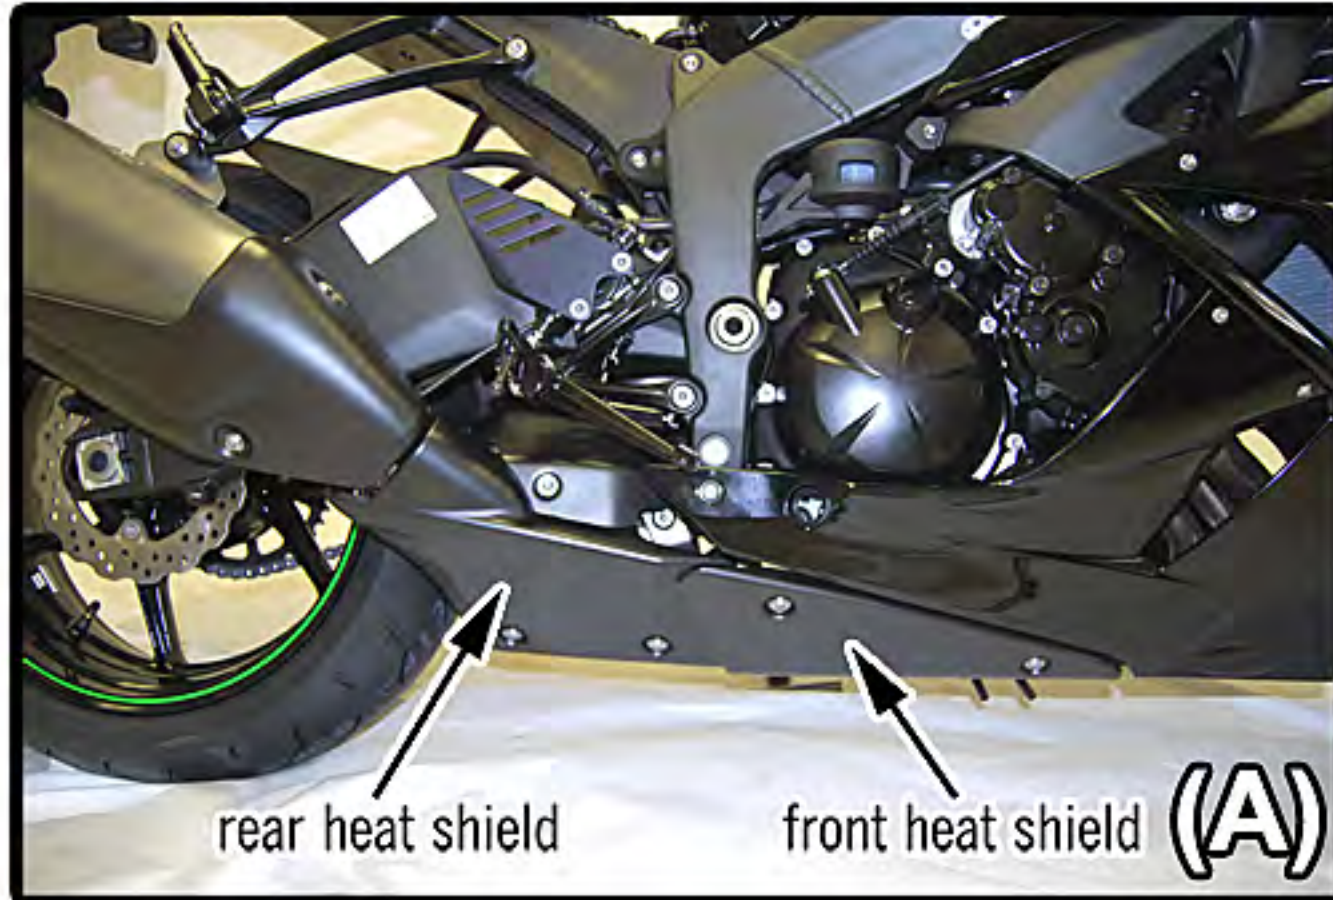

- REMOVE: Side covers below tank. (1-bolt per side. pull outward)
- REMOVE: Front seat. (2-bolts)
- REMOVE: Ex-Up cables. (1-torx screw, 1-clip) \*FIG(B) \*NOTE\* leave electrical plugged in.
- REMOVE: Both lower heat shields. (5-allen bolts) \*FIG(A)
- REMOVE: Upper exhaust canister, (1- bolt at rear peg, 1-clamp) \*FIG(A)
- REMOVE: Collector box. (1-bolt, 1-clamp) \*NOTE\* rear wheel may need to be backed off for clearance.
- INSTALL: WerkesUSA GP canister. (stock bolt and clamp, supplied 10mm nut)
- REPLACE: Seat, side covers, and front heat shield.

**CONTENTS:** 1-WerkesUSA GP canister, 1-10mm lock nut.**\*\*IMPORTANT\*\*** To insure uniform coloring thoroughly clean with WD-40 or like product before starting motorcycle **\*\*IMPORTANT\*\***

The purchaser releases Competition Werkes inc from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.