



CHALET

ELECTRONIC DEHUMIDIFIER



Keep your home comfortable and your family healthy by reducing moisture in the air, which simultaneously prevents mold growth. GREE's **Chalet** dehumidifiers offer effective dehumidifying power for healthier air quality and a drier environment.



R410A
ENVIRONMENTALLY FRIENDLY



DIRECT-TO-DRAIN OPTION*



LOW TEMPERATURE OPERATION



3-SPEED FAN



OVERFLOW PROTECTION



DIGITAL THERMOSTAT



AUTO-RESTART



PROGRAMMABLE TIMER



SELF-DIAGNOSTIC



OMNIDIRECTIONAL CASTORS



1W STANDBY MODE



WASHABLE DUST FILTER





AUTO DEFROSTING



FILTER CLEANING REMINDER



* Drain hose not included.

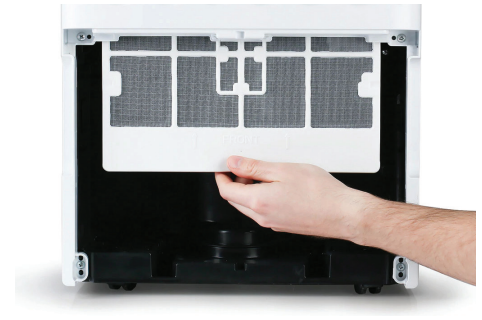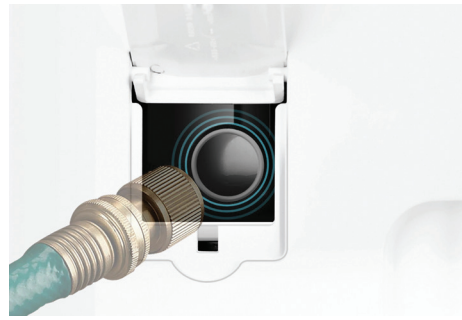

STRAIGHTFORWARD TO USE

Set the desired humidity level within a range of 35-85% using the electronic controls. After choosing a target humidity level, the dehumidifier will run until the target level is reached. It is also possible to run the unit continuously, regardless of the current humidity level.

CONTINUOUS DRAINAGE

Avoid the need to empty the tank by connecting a 3/4" female thread garden hose (not included) to your unit to use the continuous gravity drain mode. A little plumbing tape will help prevent leaks at the drain hose connection.

REUSABLE FILTER

No more searching for the right air filter! We've equipped this air conditioner with a washable filter that can be cleaned with soap and water. This filter catches large particles such as pollen, dander and hair to keep your air conditioner running smoothly.



MODEL		CHALET 20	CHALET 35	CHALET 50	
Code produit:		GDN20AZ-A3EBA**	GDN35BB-A3EBA**	GDN50BA-A3EBA**	
Power Supply	V/Hz/Ph	115 / 60 / 1	115 / 60 / 1	115 / 60 / 1	
Moisture Removal	L/d (pt/d)*	9.98 (21.1)	16.7 (35.27)	23.5 (50.0)	
Coverage	m ² (sq ft)	46 to 139 (500 to 1500)	93 to 232 (1000 to 2500)	186 to 279 (2000 to 3000)	
Energy Star®	—	YES	YES	YES	
Rated Output	W	360	540	770	
Rated Current	A	3.1	4.8	7.2	
Tank Capacity	L (pint)*	3.2 (6.8)	4.5 (9.5)	7.0 (14.8)	
Airflow Volume	m ³ /hr (CFM)	140 / 160 / 180 (82 / 94 / 106)	200 / 240 / 270 (118 / 141 / 159)	280 / 305 / 365 (165 / 179 / 215)	
Sound Level	dB	44 / 46 / 48	46 / 48 / 50	47 / 49 / 51	
Operating Temperature Range	°C (°F)	5 to 32 (41 to 90)	5 to 32 (41 to 90)	5 to 32 (41 to 90)	
Dimensions	L x H x P	mm (in)	340 x 495 x 250 (13.4 x 19.5 x 9.8)	348 x 555 x 270 (13.7 x 21.9 x 10.6)	375 x 610 x 289 (14.8 x 24 x 11.4)
	Net	kg (lb)	14.0 (30.9)	16.5 (36.4)	19.8 (43.7)
Weight	Gross	kg (lb)	15.0 (33.1)	18.0 (39.7)	21.5 (47.4)

* US pint: 0.473L



GREE Canada products are subject to continuous improvements. GREE Canada reserves the right to modify product design, specifications and information without notice and without incurring obligations.



Authorized dealer