


DM3058 Digital Multimeter

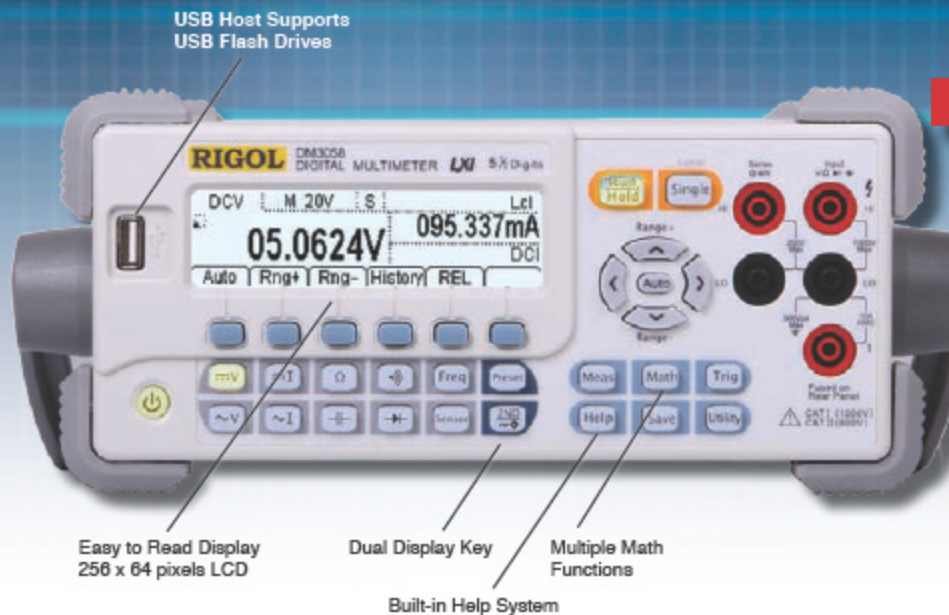

Key Features

- True 5 1/2 Digit Resolution
- Up to 120 Rds/S Maximum Sample Rate
- Fastest 5 1/2 DVM in its Class
- LXI, GP-IB and USB
- Code Compatible with Agilent 34401 and Fluke 45
- Patented Any Sensor Capability
- Easy to Use Software

Key Specifications

MODEL	DM3058		
Measurement Function	Range	Frequency Range/ Test Current	Accuracy: 1 Year +/- (% of reading + % of range)
DC Voltage	200 mV ~ 1000 V		0.015 + 0.003
DC Current	200 μ A ~ 10A		0.020 + 0.005
AC Voltage (RMS)	200 mV ~ 750 V	20 Hz ~ 100 kHz	0.20 + 0.05
AC Current (RMS)	20 mA ~ 10 A	20 Hz ~ 10 kHz	0.30 + 0.06
Resistance (2-wire and 4-wire)	200 Ω ~ 100 M Ω		0.020 + 0.003
Capacitance	2 nF ~ 10000mF		1.0 + 0.5
Diode	2.4 V	1 mA	0.05 + 0.01
Frequency and Period	200 mV ~ 750 V	10 Hz ~ 1 MHz	0.01 + 0.003
	20 mA ~ 10 A	10 Hz ~ 100 kHz	0.01 + 0.003
Continuity	2 k Ω	1 mA	0.05 + 0.01
Price	\$750.00		