

SHOWER COLUMN : TZST-13

SPECIFICATION

- STAINLESS STEEL SHOWER COLUMN, GRADE #304
- THERMOSTATIC VALVE
- 3 FUNCTIONS CERAMIC DIVERTER VALVE WITH HALF ZONE
- ASSEMBLED WITH BRAIDED STAINLESS STEEL HOSES
- SUPPLY WITH 1/2" HI-FLOW HOSES
- ANTI-SCALE SILICON NOZZLES
- PRESSURE : MINIMUM 35 PSI, MAXIMUM 80 PSI

AVAILABLE OPTION

- LED LIGHTING SYSTEM : SHOWER HEAD WITH LED (REF. MODEL TZST-13L)
- B-36 : ADDITION OF A DIVERTER SPOUT (REF. MODEL TZST-13/B36)
- RD-XX : HAND SHOWER HOOK REPLACED BY A SLIDING BAR

AVAILABLE FINISH

- BRUSHED STAINLESS STEEL : TZST-13
- MIRROR BLACK : TZSTBL-13
- CHROME : TZSTC-13

ACCESSORIES

SHOWER HEAD	INTEGRATED
HAND SHOWER	HS-204
HAND SHOWER HOOK	HSH-101
HOSE 125CM [49"]	SSHE-125
DIVERTER SPOUT (OPTION)	R-36

CONNECTION

- 1/2" FEMALE


FLOW RATE

THERMOSTATIC VALVE	30 L/MIN [7,9 GPM] @ 60 PSI
SHOWER HEAD	7,9 L/MIN [2,1 GPM] @ 60 PSI
HAND SHOWER	7,9 L/MIN [2,1 GPM] @ 60 PSI
BODY JETS (2)	9,7L / MIN, [2,6 GPM] @ 60 PSI
DIVERTER SPOUT (OPTION)	17 L/MIN [4.5 GPM] @ 60 PSI

WARRANTY

PRODUCTS COVERED BY A FULL LIFETIME LIMITED WARRANTY AGAINST ALL MANUFACTURING DEFECTS ON THE FAUCET AND FINISH.

FOR MORE INFORMATION ABOUT THE PRODUCT OR BEFORE PROCEEDING TO ANY INSTALLATION PLEASE CONSULT THE GUIDE.

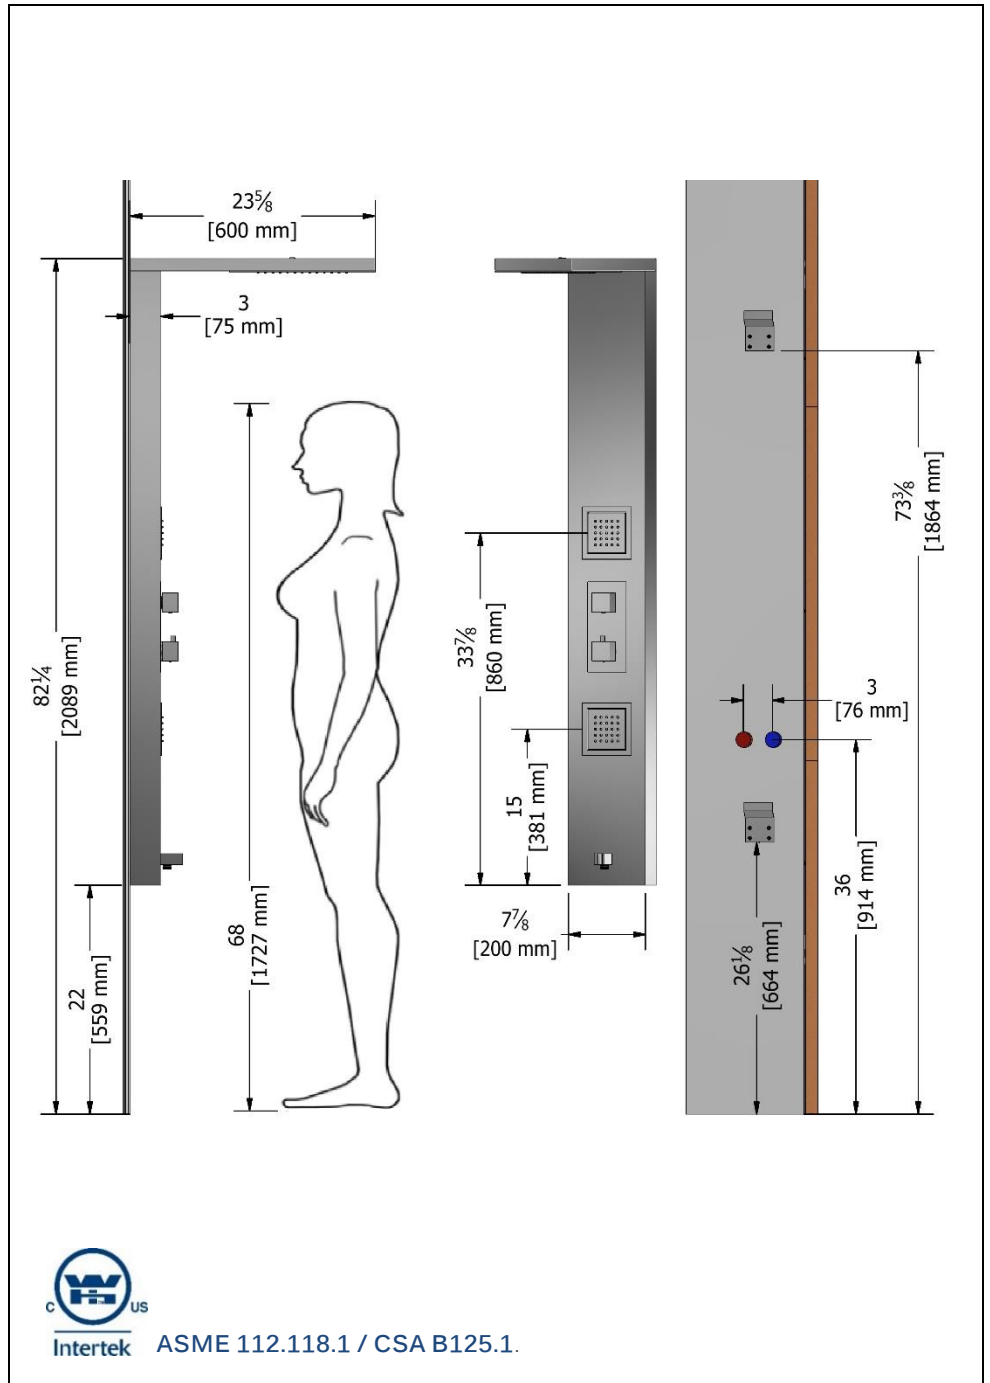

THE PRODUCT MAY VARY SLIGHTLY FROM ITS DIMENSION AND APPEARANCE.

EDITION : 30-09-2015