




Product Datasheet

New 2020 Edition 2>Recessed Spots Fixed LED

10108H/B/W

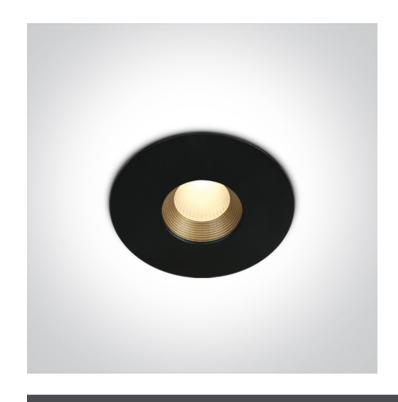

8W COB LED Dark light recessed Spot, IP54.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



1 IP54 CRI DARK CE


Downloads







Dimensions






Physical Specification

Item Group	New 2020 Edition 2
Family	Recessed Spots Fixed LED
Order Code	10108H/B/W
Colour	Black
Material	Die Cast
Shape	Circular
Height	55mm
Diameter	88mm
Cutout Hole Diameter	75mm
Recessed Ceiling	Yes
Depth Required	70mm
Indoor	Yes

Outdoor	Yes
Adjustable	No
ectrical Characteristics	
Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	8W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	200mA
Voltage	38V
Safety Class	
Power(Watts)	7,6W
IP Rating	IP54
Light Source	LED built in
LED Type	COB
LED Brand	Cree
F Mark	F
Gear	
Gear Type	Led Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	4-8W
Power Factor	0,9
Constant Current	Yes
200mA	20-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Illumination Data	
Colour Temperature	3000K
Colour Temperature Lumen Output	3000K 600lm
Lumen Output	600lm
Lumen Output Light Efficiency	600lm 75lm/W
Lumen Output Light Efficiency CRI	600lm 75lm/W
Lumen Output Light Efficiency CRI Beam Angle	600lm 75lm/W 90 36°
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	600lm 75lm/W 90 36°
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light	600lm 75lm/W 90 36°
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	600lm 75lm/W 90 36°
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light	600lm 75lm/W 90 36°
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light	600lm 75lm/W 90 36° Yes
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info Pcs/Carton	600lm 75lm/W 90 36° Yes
Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info Pcs/Carton Barcode	600lm 75lm/W 90 36° Yes 50 5291889065166

Energy Label



Certification & Warranty

Warranty	5 Years
Weee Directive	Yes



