



C600

AIRBORNE CHEMICALS

REMOVE HARMFUL AIRBORNE CHEMICALS AND GASES FROM YOUR INDOOR AIR

THE AIRPURA C600 Available in White / Black / Cream

THE AIRPURA LIMITED WARRANTY 5 years parts / 10 years labor



THE AIRPURA C600 ENHANCED CHEMICAL ABATEMENT UNIT OFFERS YOU:

- **26 LB ACTIVATED CARBON BED** Adsorbs airborne chemicals, gases and odors.
- **HEPA-BARRIER POST FILTER** Traps particles after the carbon bed.
- **SPECIALLY BLENDED CARBONS FOR SPECIFIC CHEMICALS** Over 400 blends of impregnated activated carbon are available to solve your contamination problem.
- **560 CFM INTEGRATED FAN / MOTOR** Largest CFM available in a portable unit.
- **VARIABLE SPEED MOTOR** Gives you flexible air flow options.
- **PROPER CONTACT TIMES FOR EFFECTIVE FILTRATION** Correctly calibrated air flow / bed depth for efficient adsorption.
- **PRESSURE SEALED FILTER CHAMBER** Unique pressure seal on the filter chamber ensures all contaminants are filtered and non escape.

OVER 4000 CHEMICALS CAN BE REMOVED

Carbon blends are available to deal with over 4000 airborne chemicals including:

- | | | |
|------------------|--------------------|-----------------|
| Ammonias | Hydrogen Bromide | Toulene |
| Nitrous dioxide | Sulfur dioxide | Napthene |
| Nitrous trioxide | Hydrogen fluoride | Pesticides |
| Monoethylamine | Hydrogen chloride | Chlorine |
| Hydrogen Sulfide | Benzene | Mold Mycotoxins |
| Mercury vapors | Methylene Chloride | |
| Chlorine dioxide | Radioactive Iodine | |

FILTER LIFE



PREFILTER should be replaced every 12 months.




CARBON FILTER should be replaced every 2 years



HEPA BARRIER FILTERS should be changed every 12 months

EXPERIENCE THE EVOLUTION OF CLEAN AND HEALTHY AIR

FILTRATION SYSTEM

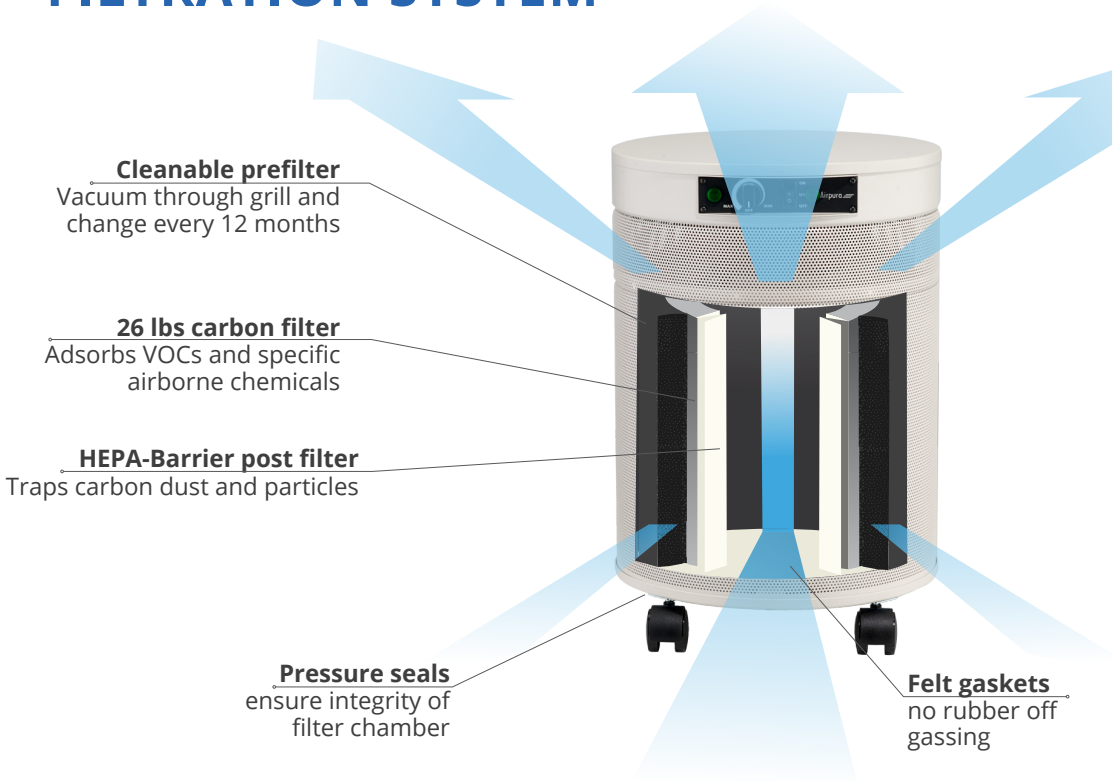

Cleanable prefilter
Vacuum through grill and change every 12 months

26 lbs carbon filter
Adsorbs VOCs and specific airborne chemicals

HEPA-Barrier post filter
Traps carbon dust and particles

Pressure seals
ensure integrity of filter chamber

Felt gaskets
no rubber off gassing

UNIQUE FEATURES

ALL METAL HOUSING ensures no plastic vapors are emitted.

MOTOR OUT OF THE AIR FLOW. Most air purifiers blow the clean air over the motor and pick up impurities, while our purifiers do not.

ELECTRICAL PARTS IN A SEALED CHAMBER OUT OF THE AIRFLOW. Increases safety and prevents off-gassing

PRESSURE SEALED FILTER CHAMBER prevents leakage of polluted air around filters.

FELT GASKETS SEAL THE FILTER CHAMBER. Maximize filtration with no rubber off-gassing found with other filters.

CLEAN MODERN APPEARANCE fits in with any decor.

LOW NOISE LEVEL (at 6 feet) 25 db on low 61 db on high (560 cfm).

SPECIALLY DESIGNED TO REMOVE SPECIFIC AIRBORNE CHEMICALS AND VOCS

DWELL TIME

For best results the correct dwell time of the pollutants over the enhanced carbon bed is vital. The 560 CFM impeller/motor combined with the fixed speed control and unimpeded airflow of the Airpura 600 series allows you to set the airflow precisely and achieve the results you need.

EXPERTISE YOU CAN CALL ON

Airpura indoor air quality experts can offer you a solution to most airborne chemical problems. Contact your Airpura dealer or call us directly to discuss your needs.

TECHNICAL SPECIFICATIONS

ODORS, AIRBORNE CHEMICAL CONTROL
26 lbs activated carbon
13"H x 13.25"OD x 7.5"ID

CARBON BED
3" deep x 570 sq" surface

AIR FLOW 560 CFM
More cfm than any other portable unit available

PRE-FILTER
570 sq in x 1 in

POST PARTICLE FILTER
306 sq in

SIZE
23" x 15"

WEIGHT
45 lbs total

VOLTAGE OPTIONS
115 or 220 volts

WATTS
120 on high / 40 on low

SOUND LEVEL
34.2db on low (at 6 feet)
57.2 db on high (560 cfm)
(Room level 25.1 db)

ETL CERTIFIED
Conforms to ANSI / UL 507

YOUR
AIRPURA™ DEALER

