

NOVACOB01

LED Dimmable with **MAGNETIC CHANGEABLE FACEPLATE** Recessed Downlights


TRI-CCT 3000K 4000K 5700K

- Input voltage range: 220-240V 50/60Hz
- Inbuilt constant current driver included
- Housing: aluminium & plastic
- Faceplate: powder coated aluminium
- Diffuser: PC
- Tri-CCT (3000K/ 4000K/ 5700K) in one fitting
- CCT switch on rear
- LED chip: 1PC COB SMD2835
- Power factor: 0.9
- CRI: ≥80
- Flex & plug: 0.6m
- Ambient temperature: -20 to 40°C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with sensors




Box Include:

- 1x Downlight (NOVACOB)
- 1x Loose Satin Chrome (NOVADSC) faceplate
- 1x Loose White faceplate



Tested & Recommended Dimmers:

BRAND	PART NO.	PCS PER DIMMER
CLA	LYNX	1-10PCS
CLIPSAL	32E450TM	
HPM	CAT400T	
DIGINET	MEDM, MMDM/RT	

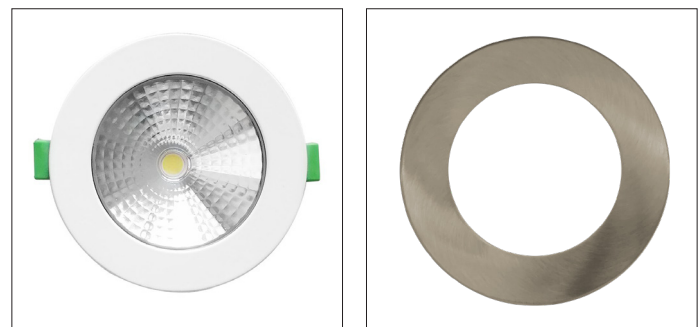


NOVACOB01


NOVADSC

Available faceplates (Sold Separately):

- Matt Black (NOVADBLK)



NOVADBLK

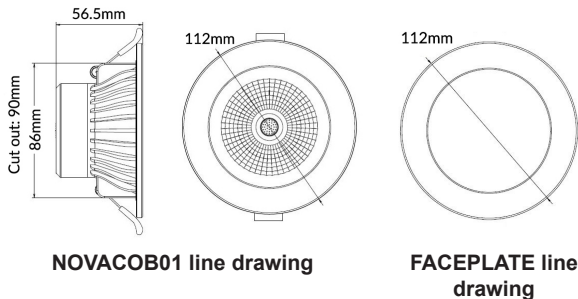

NOVACOB01 line drawing

FACEPLATE line drawing

PART NO.	DESCRIPTION	LUMENS			WATT	CUT OUT	BOX WEIGHT	BOX DIMENSIONS	CARTON QTY
		3000K	4000K	5700K					
NOVACOB01	D/L LED COB FIXED WH+S/C DIMM RND TRI	800LM	950LM	850LM	10W	Ø90mm	0.26kg	12x12x7cm	1/40
NOVADBLK	FACEPLATE TO SUIT NOVADLUX01 & NOVACOB01 MATT BLK OD 112mm								