

Installation Manual

TEK-10

| Order Code | Product Code | Description |
|------------|--------------|--|
| 20600 | TEK-10-W-WW | Powder Coated Satin White 10W Downlight, 3000K |
| 20601 | TEK-10-W-W | Powder Coated Satin White 10W Downlight, 5000K |
| 20602 | TEK-10-S-WW | Plated Satin Chrome 10W Downlight, 3000K |
| 20603 | TEK-10-S-W | Plated Satin Chrome 10W Downlight, 5000K |

Thank you for purchasing your new LED TEK-10, Please take the time to read and understand the instruction sheet below. Failure to do so may void warranty.

Specifications


| | | | | | |
|------------|---------|--------------|-----------------------------------|-----------|---------------------------|
| Voltage: | 240V AC | Lumen (±5%): | WW 3000K - 750lm W 5000K 800lm | Dimmable: | Yes (Domus dimmer series) |
| Power: | 10W | Beam Angle: | 90° | CRI: | ≥80 |
| IP Rating: | 44 | CCT: | 3000K - 5000K | Lifespan: | 50,000hrs |

How to install:

- The LED down light shall be installed in accordance to Australian/NZ electrical standards.
- The LED down light shall be installed in locations and in conditions as described in the below figure.
- Please make sure all electricity is switched off at the main switch board before any electrical works are to commence.
- Cut out the hole according to the downlight cutout table.
- The LED driver is supplied with an Australian approved 2pin flex and plug.
- For easy maintenance Domus recommends the use of plug base sockets in the ceiling.
- If you are intending to hard wire the LED drivers please remove the supplied flex and plug from the LED driver.
- When connecting the LED lamp/down light to the LED driver please ensure the connecting plug is securely pushed in and the connection is not loose.

Ceiling space cross section

Note: The driver must be over the insulation.

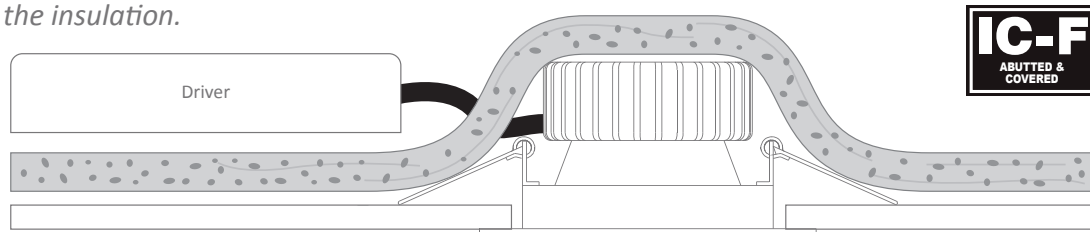

Note: -The lamp must be installed by professional electrician
-Ensure the power supply is switched off before fitting this product

-Do not touch the lamp when in use
-Keep away from hot steam and corrosive gas