

# SunWave™

## A19 E26 Dimmable LED Bulb

Yuji Lighting® SunWave™ LED lamps provide optimal lighting solutions for the perfect simulation of sunlight. Designed with Yuji solar spectrum technology, lamps emit nearly 100% similar solar spectrum, giving people the same experience as sunlight. They are excellent for all scenarios that require artificial light sources, such as hospital, classroom, office, studio, apartment etc.



### Features



- Up to CRI 98+ light quality
- Up to R9 95+ improved skin tone rendering
- TM30 & TLCI specified & controlled
- 99 color samples proven (Improved TM-30)
- Smooth dimming down to 5%
- Soft warm light for eye comfort
- 25,000 hours life time
- 1:1 Direct replacement of A19 incandescent bulb

### Specification

Part Number	Power Consumption	CRI	Beam Angle	Color-Temp	Luminous Flux	ON/OFF	Lifetime
L3210072.27	11W	98+	200°	2700K	1000lm	100,000	25,000hr
L3210072.30				3000K	1000lm		
L3210072.40				4000K	1100lm		
L3210072.50				5000K	1100lm		
L3210072.65				6500K	1100lm		

## SunWave™ A19 E26 Dimmable LED Bulb

### General Information

Cap base:	E26	Nominal lifetime:	25000 hr
EU RoHS compliant:	Yes	Switching cycle:	100000 X
Diameters:	2.36 inch / 60 mm	Net weight per lamp:	3.35 oz / 95 g
Height:	4.61 inch / 117 mm		


### Technical data—Photometrical

Color-Temp:	2700K ~ 6500K	Color rendering index:	98+
Initial luminous flux:	1000 lm ~ 1100 lm	R9:	90+
Color consistency:	SDCM<6	TM-30-20 Rf:	97
Beam angle:	200°	TM-30-20 Rg:	102


### Technical data—Electrical

Power:	11 W	Nominal voltage:	120 V
Power factor:	≥ 0.98	Input frequency:	60 Hz
Lamp current:	95 mA	Starting time:	<0.5 s
Dimmable:	Yes	Warm-up time (60 %):	<0.5 s

**Spectral power distribution (3000K)**

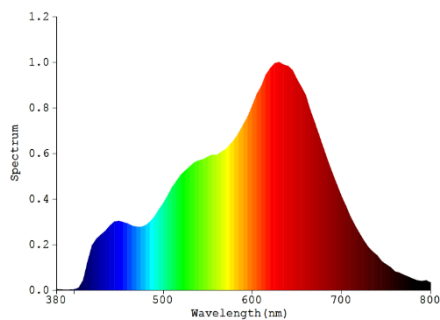

**Color accuracy (3000K)**

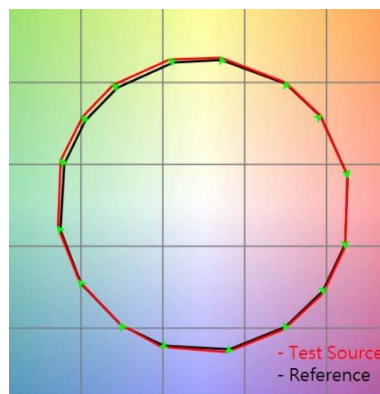

**Distribution diagram (3000K)**

