

# INSTALLATION INSTRUCTIONS

Item#N7553-695 (New. 2023/02/13)

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### PREPARATION (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.

### ASSEMBLING THE FIXTURE (Fig. 1)

3. Thread all thread (J) to hex joint (K) of fixture. Place metal finial (H1) or wood finial (H2), crystal (I) metal finial (H1) or wood finial (H2), to all thread (J) and secure with metal tube (E).
4. Determine the desired hanging height and thread rods (F1, F2 and F3) to all thread on metal tube (E). Attach canopy (D) by threading onto rod (F1). Carefully pass wires through each rod during assembly.
5. Thread screws (A) into pre-drilled holes on crossbar (B) spaced same distance apart as holes in canopy (D).
6. Attach crossbar (B) to junction box (not included) using mounting screws (C) (Size: #8-32N\*L0.5"). The side of the crossbar (B) marked "GND" must face out.

### CONNECTING THE WIRES (Fig. 2)

7. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to crossbar (B) using green screw provided.
8. Tuck wire connectors neatly into the junction box.

### COMPLETING THE INSTALLATION (Fig. 1)

9. Place canopy (D) over screws (A) and secure with decorative knobs (G).
10. Place candle covers (M) over sockets (N).
11. Install (3) three candelabra base bulbs (L) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.

Your installation is now complete. Return power to the junction box and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**


Fig. 1

Set# A-010

- Crossbar

-Ground screw

-Mounting screw \*2

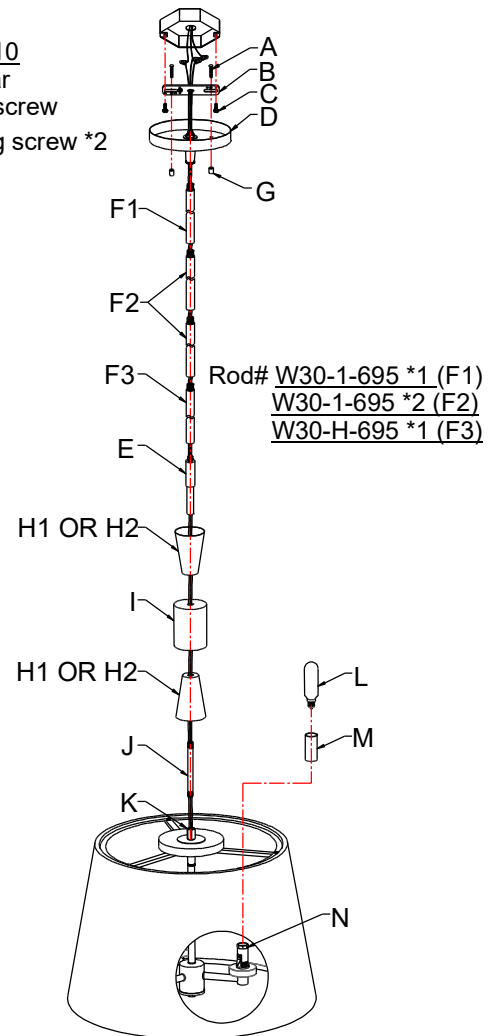

Candle cover# CCV21050P-695

Fig. 2

