

Kola 13 and 22 Flush Mount

700FMKLA_ 1.0

VISUAL COMFORT & Co.

MODERN COLLECTION

GENERAL PRODUCT INFORMATION:



These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is suitable for damp locations.

This product can be dimmed with most low-voltage electronic dimmers.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

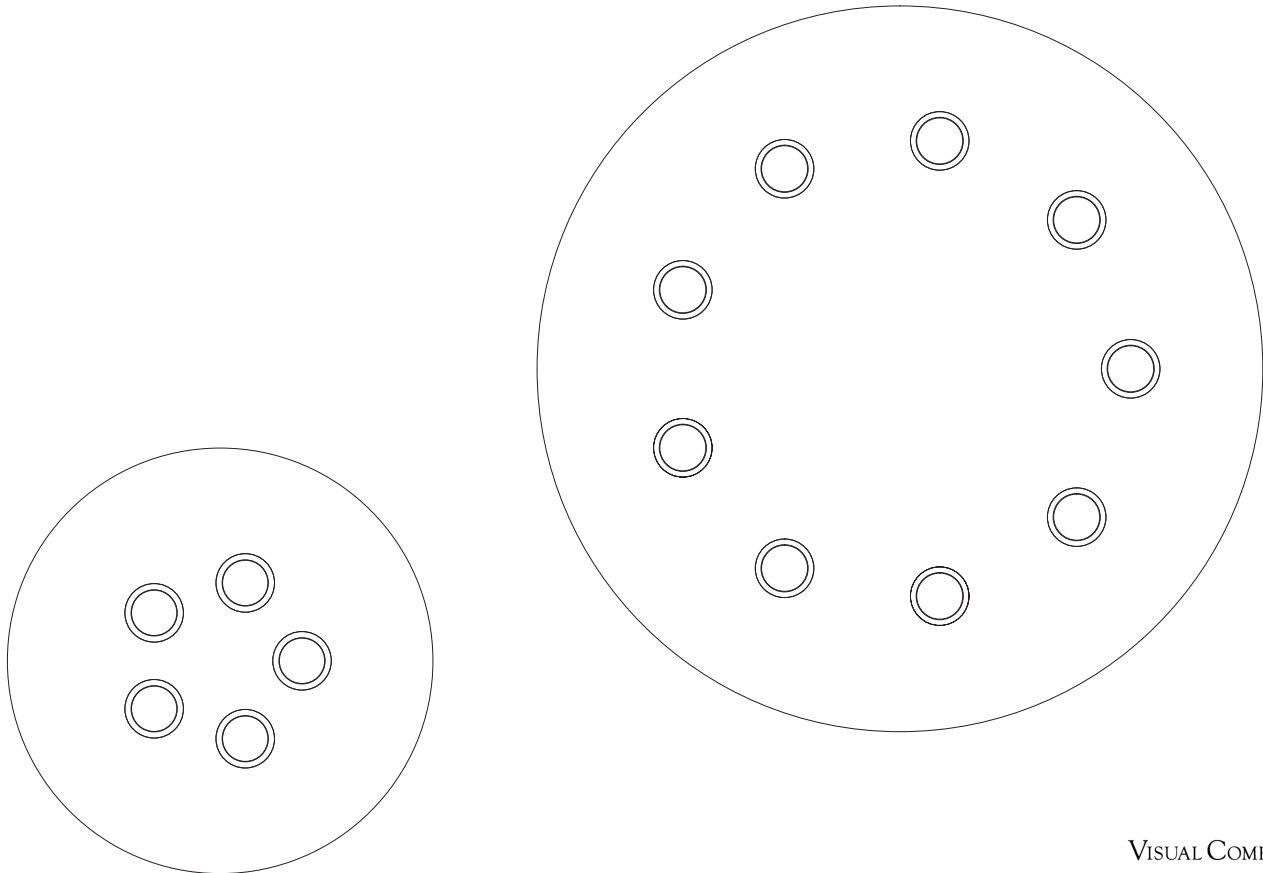

VISUAL COMFORT & Co.


7400 Linder Ave., Skokie, IL 60077

T 847.410.4400 | F

847.410.4500

www.visualcomfort.com

Install the Fixture

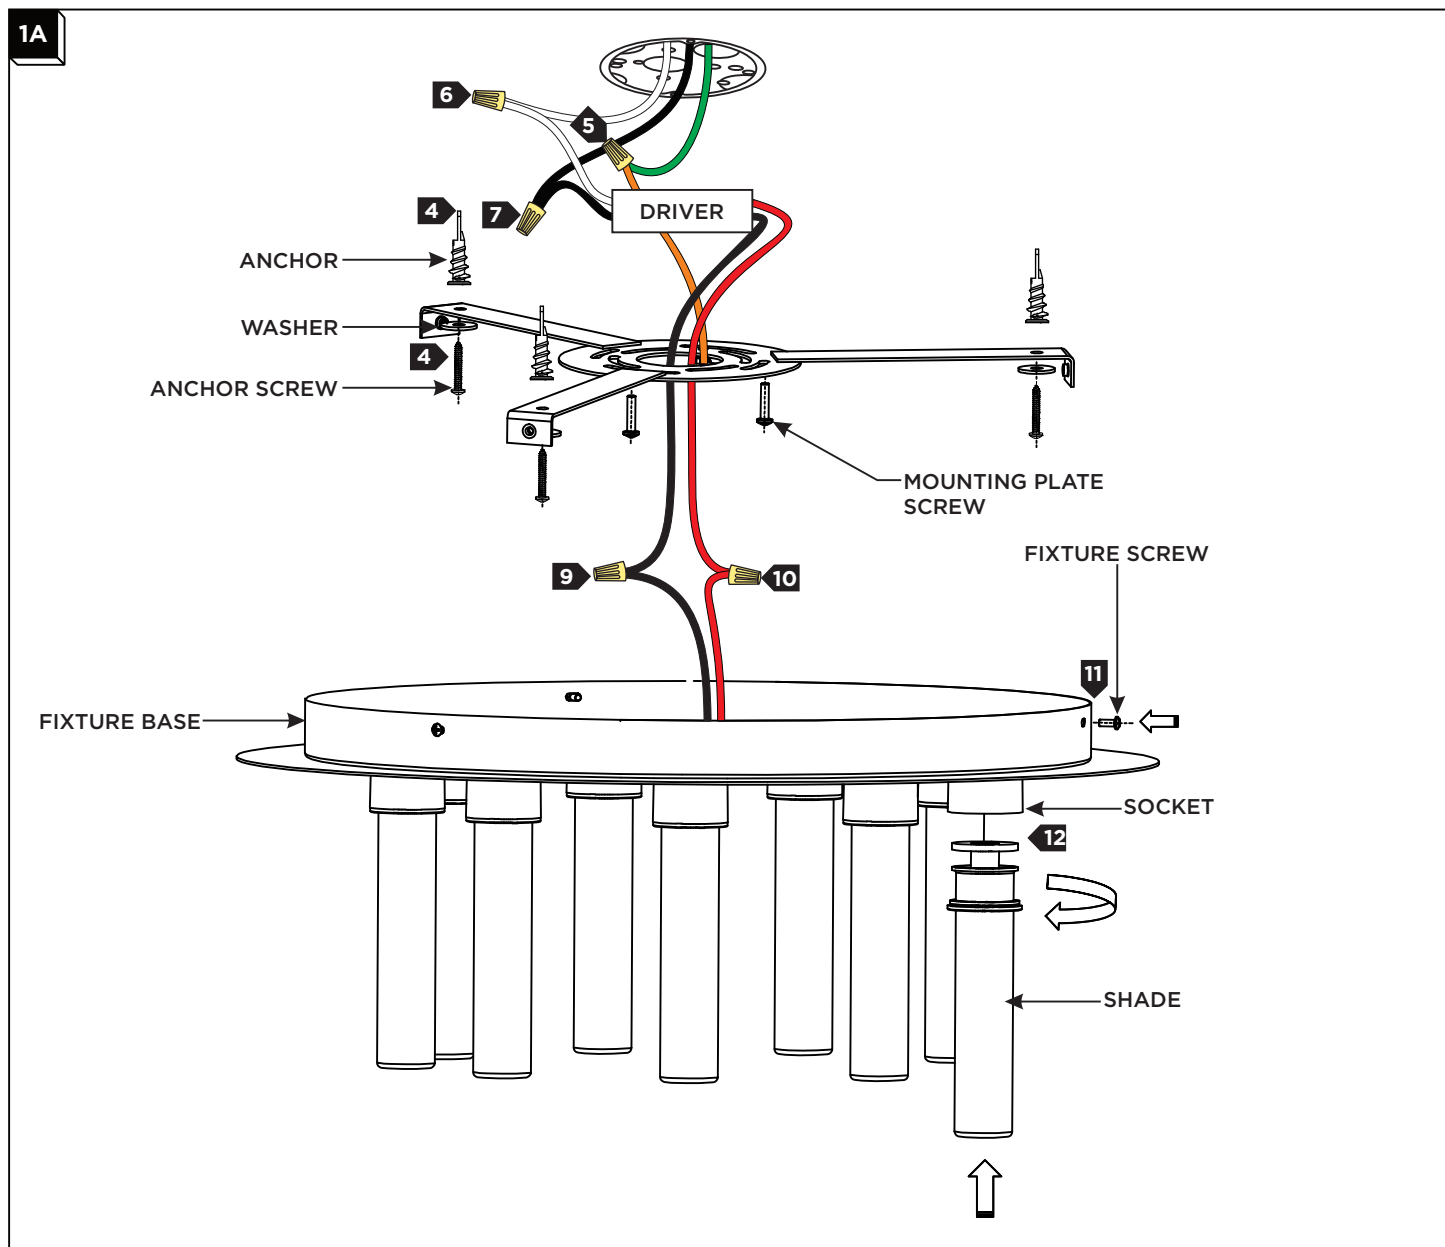

- 1** Separate the mounting plate from the fixture by removing the fixture screws.
- 2** Temporarily install the mounting plate to the junction box with the provided #8-32 screws.
- 3** Mark the location of the anchors and remove the mounting plate.
- 4** Line the anchor tip to the marked location and push the anchor into the ceiling up to the threads. Screw the anchor in the rest of the way with a Phillips-head screwdriver. Repeat for remaining anchor holes.
- 5** Connect the fixture to suitable ground in accordance with local electrical codes.
- 6** Connect the white driver wire to the neutral power line wire with a wire nut.
- 7** Connect the black driver wire to the hot power line wire with a wire nut.
- 8** Properly place the driver, all wires, and wire nut connections into the electrical box. Install the mounting plate onto the electrical box with the two #8-32 screws provided and secure it with anchor screws and washers.
- 9** Connect the black driver wire to the black fixture wire with a wire nut.
- 10** Connect the red driver wire to the red fixture wire with a wire nut.
- 11** Mount the fixture base onto the mounting plate and secure in place using the fixture screws.
- 12** Screw the shades onto the sockets.