

Cupertino ILight Wall Lantern

CO1491, CO1501, CO1511 | 1.0

GENERATION LIGHTING WALL

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for wet locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

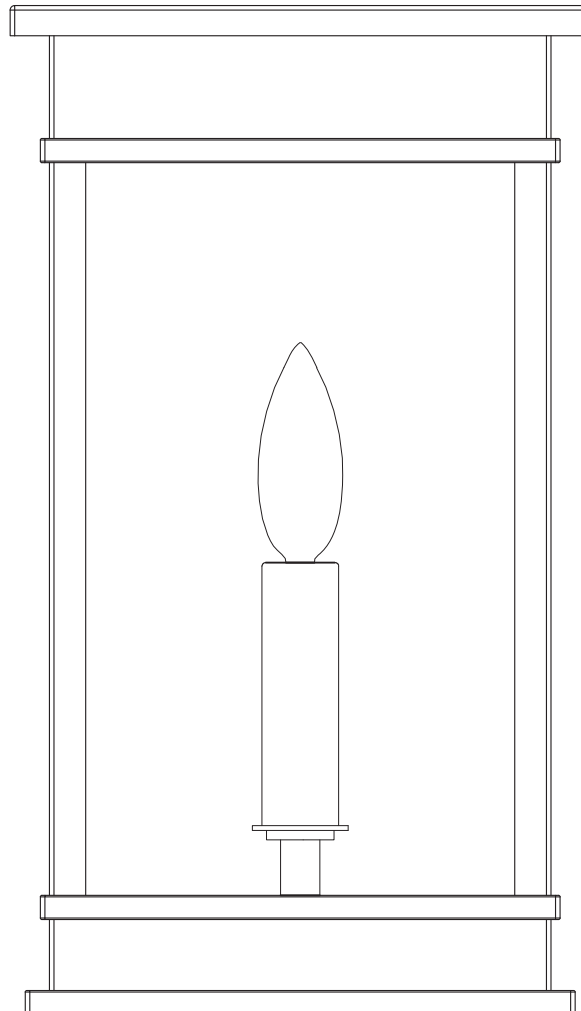

GENERATION LIGHTING
7400 Linder Ave., Skokie, IL 60077
T 847.410.4400 | F 847.410.4500
www.generationlighting.com

Install the Fixture

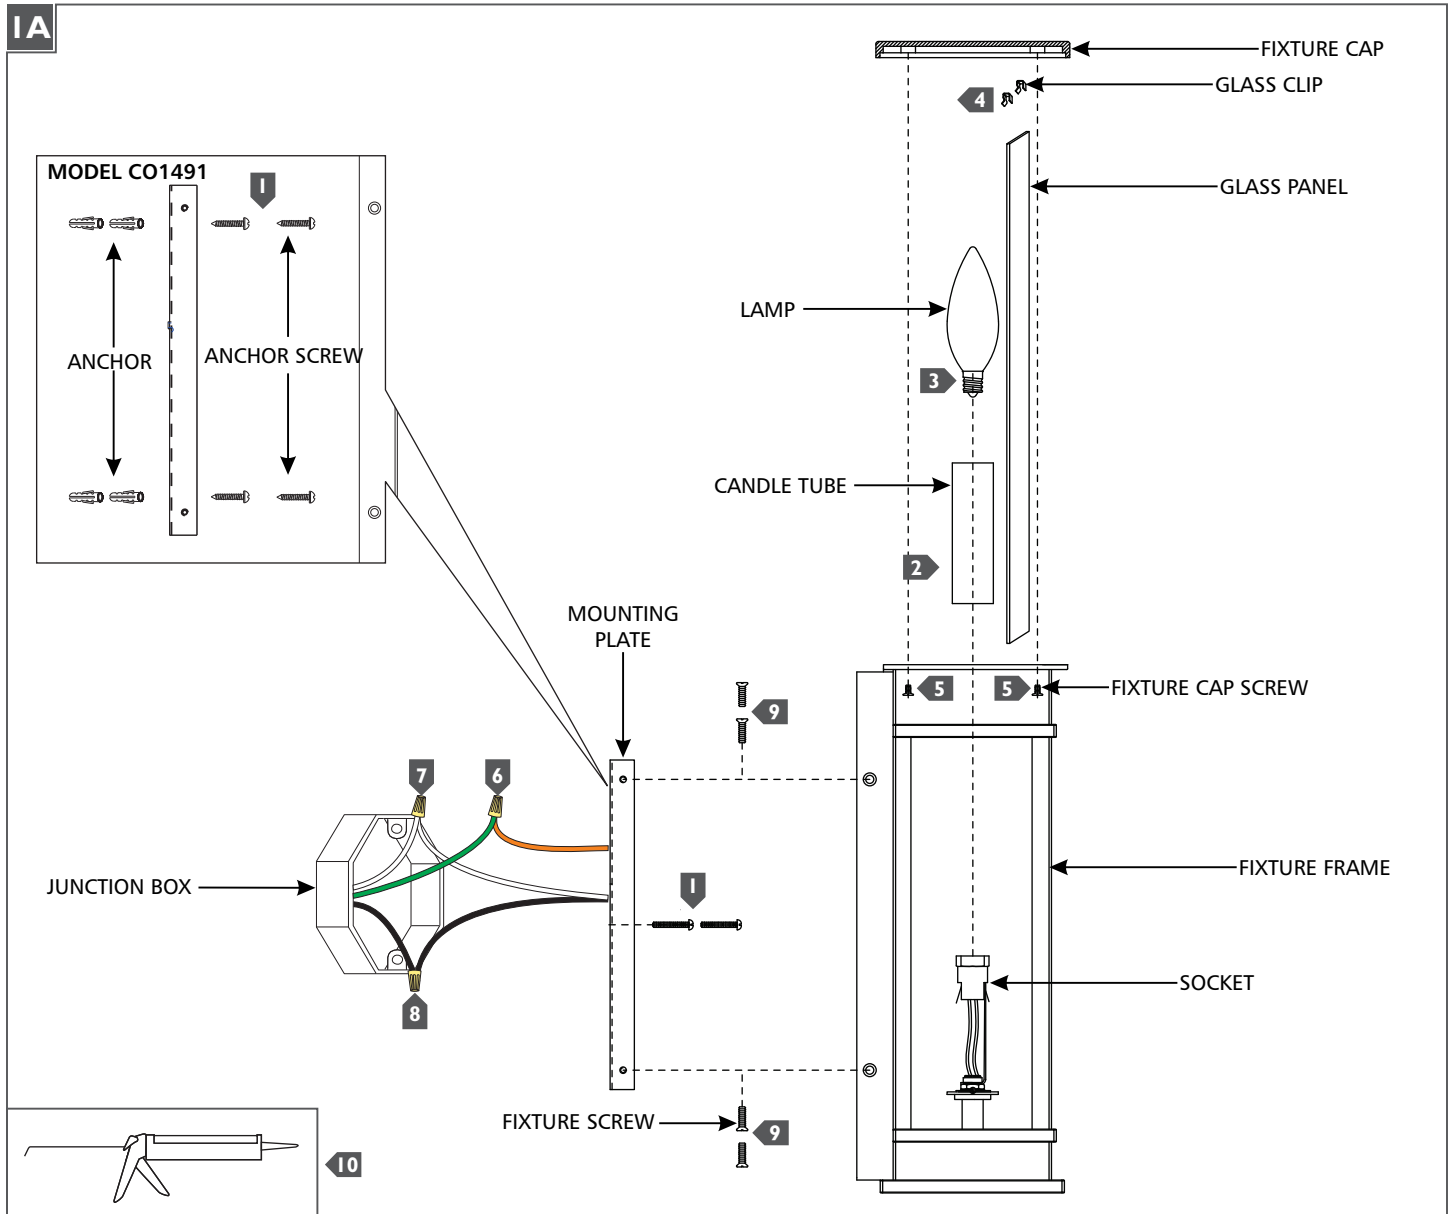

- 1** Secure the mounting plate to the junction box. **NOTE: Model CO1491 must be secured with anchors and screws.**
- 2** Install the candle tube on to the socket assembly.
- 3** Screw the lamp into the socket. Refer to the label on the lamp socket for Max Wattage Information.
- 4** Install the glass panels into the fixture frame and secure them in place with the glass clips.
- 5** Install the fixture cap on the top of the fixture frame and secure it in place with the provided screws.
- 6** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 7** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 8** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 9** Neatly place all the wires into the junction box, place the fixture base onto the mounting plate, and secure it in place using the fixture screws.
- 10** For wet locations, caulk around the base of the fixture with waterproof construction sealant.