


Tube. GRP, galvanised steel, stainless steel & powder coated

| Revision # | Revision Date |
|------------|---------------|
| # 0 | 18/01/2023 |
| | |
| | |

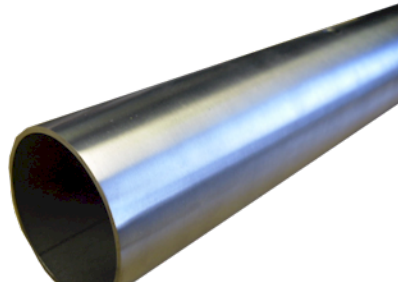
Lockinex[®]
great service, great quality

Galvanised tube

|  | Tube diameter | Wall thickness | Stock length availability |
|--|----------------------|-----------------------|----------------------------------|
| | 26.9mm | | 3.2mtr, 6/6.4mtr |
| | 33.7mm | 3.2mm | 3.2mtr, 6/6.4mtr |
| | 42.4mm | 3.2mm | 3.2mtr, 6/6.4mtr |
| | 48.3mm | 3.2mm | 3/3.2mtr, 6/6.4mtr |
| | 60.3mm | 3.6mm | 3.2mtr, 6/6.4mtr |

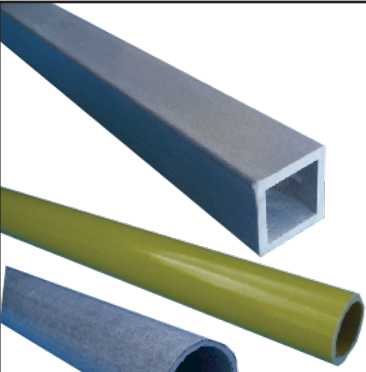
Lockinex tube manufactured to EN10255:2004 and galvanised to EN 10240:A1

Stainless steel tube

|  | Tube diameter | Wall thickness | Stock length availability |
|---|----------------------|-----------------------|----------------------------------|
| | 42.4mm | 2mm | 6mtr |

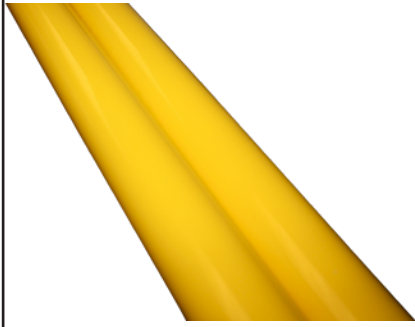
Grade 304 stainless steel tube with 320 grit satin finish.

GRP tube

|  | Tube type | Wall thickness | Stock length availability |
|--|----------------------|-----------------------|----------------------------------|
| | Yellow 50mm dia. CHS | 5mm | 5mtr |
| | Grey 38mm dia. CHS | 3mm | 6mtr |
| | Grey 50 x 50mm SHS | 6mm | 6mtr |

GRP tubular sections. Surface veils are used in all GRP tube along with oxybenzone additives within the resin to increase UV resistance.

Stock powder coated tube

**Tube diameter**

42.4mm

48.3mm

Wall thickness

3.2mm

3.2mm

Stock length availability

1060mm, 1.6mtr, 3.2mtr

1060mm, 1.6mtr, 3.2mtr

Lockinex galvanised tube powder coated RAL 1023 yellow. Galvanised tube is phosphate treated prior to powder coating for enhanced corrosion resistance and best powder coating adhesion.