Stratos 36 - 12" Hybrid EXT Lollipop - SVX-W (SUBJECT TO CHANGE)

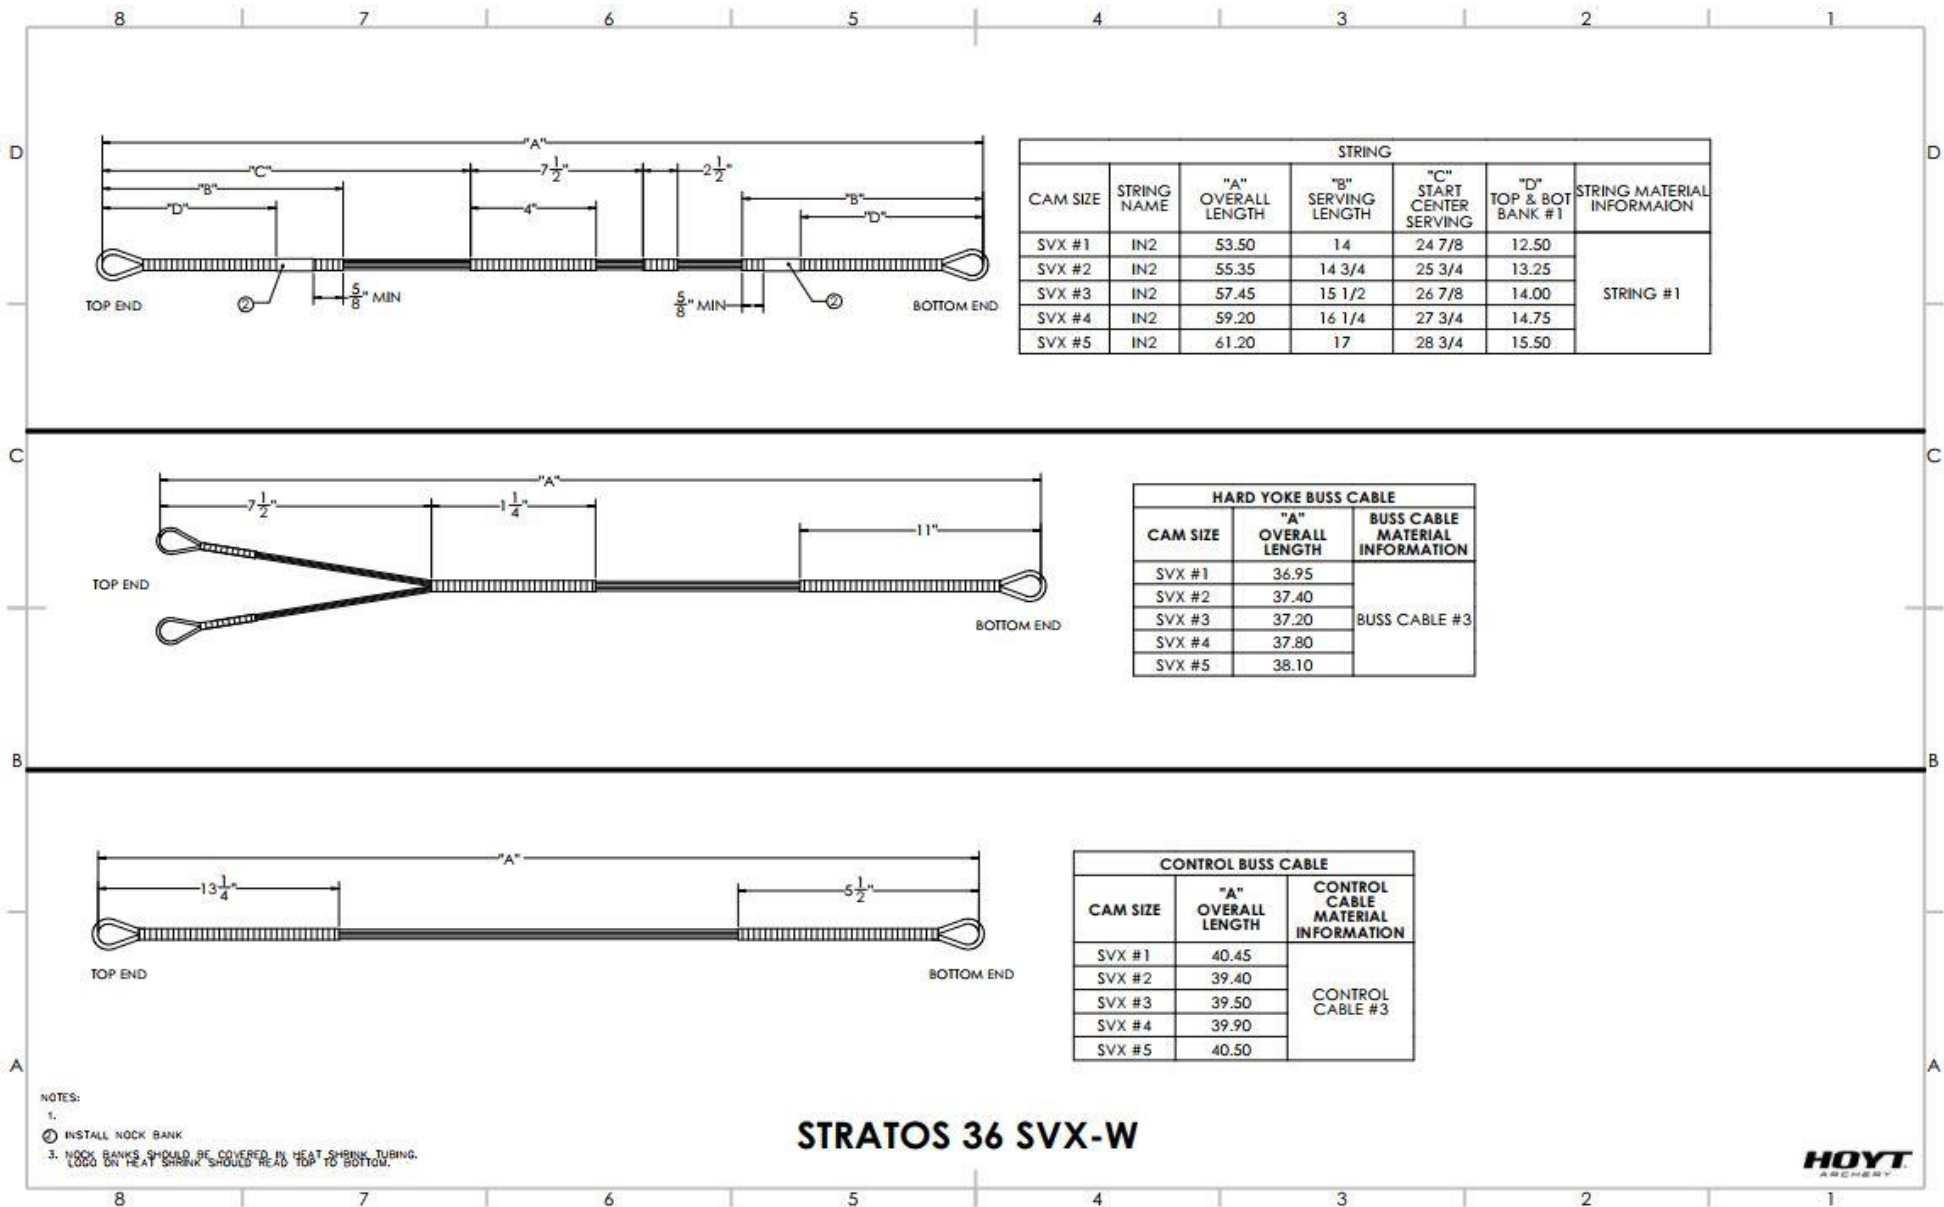| CAM	LETOFF	BRACE HEIGHT	AXLE TO AXLE	DRAW LENGTH	MODULE POSITION	CAM SIZE	STRING	CONTROL CABLE	BUSS CABLE
SVX-W	70.00%	7	35	23 1/2	A	1	53.50	40.45	36.95
	70.00%	7	35	24	B	1	53.50	40.45	36.95
	70.00%	7	35	24 1/2	C	1	53.50	40.45	36.95
	70.00%	7	35	25	D	1	53.50	40.45	36.95
	70.00%	7	35	25 1/2	E	1	53.50	40.45	36.95
	70.00%	6 7/8	35 5/8	26	A	2	55.35	39.40	37.40
	70.00%	6 7/8	35 5/8	26 1/2	B	2	55.35	39.40	37.40
	70.00%	6 7/8	35 5/8	27	C	2	55.35	39.40	37.40
	70.00%	6 7/8	35 3/4	27 1/2	A	3	57.45	39.50	37.20
	70.00%	6 7/8	35 3/4	28	B	3	57.45	39.50	37.20
	70.00%	6 7/8	35 3/4	28 1/2	C	3	57.45	39.50	37.20
	70.00%	6 7/8	36 1/8	29	A	4	59.20	39.90	37.80
	70.00%	6 7/8	36 1/8	29 1/2	B	4	59.20	39.90	37.80
	70.00%	6 7/8	36 1/8	30	C	4	59.20	39.90	37.80
	70.00%	6 13/16	36 5/8	30 1/2	A	5	61.20	40.50	38.10
	70.00%	6 13/16	36 5/8	31	B	5	61.20	40.50	38.10

*=Shipped Module Position

Model Year: 2023
Model: Stratos 36
Limb: 12" Hybrid EXT lollipop

Pocket: B1
Pocket Dowel: B1
Rocker: 18 & 19

Limb Bolt Length: 1.75" SHCS
Cable Guard Bar: 6.50"
Stealth Shot Bar: 4.50"

Limb Shox: N/A
String Model: IN2

Date: 8/17/22

STRING

CAM SIZE	STRING NAME	"A" OVERALL LENGTH	"B" SERVING LENGTH	"C" START CENTER SERVING	"D" TOP & BOT BANK #1	STRING MATERIAL INFORMAION
SVX #1	IN2	53.50	14	24 7/8	12.50	
SVX #2	IN2	55.35	14 3/4	25 3/4	13.25	
SVX #3	IN2	57.45	15 1/2	26 7/8	14.00	STRING #1
SVX #4	IN2	59.20	16 1/4	27 3/4	14.75	
SVX #5	IN2	61.20	17	28 3/4	15.50	

HARD YOKE BUSS CABLE

CAM SIZE	"A" OVERALL LENGTH	BUSS CABLE MATERIAL INFORMATION
SVX #1	36.95	
SVX #2	37.40	
SVX #3	37.20	BUSS CABLE #3
SVX #4	37.80	
SVX #5	38.10	

CONTROL BUSS CABLE

CAM SIZE	"A" OVERALL LENGTH	CONTROL CABLE MATERIAL INFORMATION
SVX #1	40.45	
SVX #2	39.40	
SVX #3	39.50	CONTROL CABLE #3
SVX #4	39.90	
SVX #5	40.50	

NOTES:
1.
② INSTALL NOCK BANK
3. NOCK BANKS SHOULD BE COVERED IN HEAT SHRINK TUBING. LOGO ON HEAT SHRINK SHOULD READ TOP TO BOTTOM.

STRATOS 36 SVX-W

HOYT ARCHERY

After Market String Warning

Warning: Never use aftermarket strings or cables on your bow. Aftermarket strings and cables may not be suitable for replacement on your Hoyt bow. Hoyt cannot guarantee that the materials or the manufacturing methods used by aftermarket string and cable manufacturers will be suitable for use on your Hoyt bow. Failure to heed this warning could result in serious injury or death to yourself or bystanders. Only Genuine Hoyt or Fuse branded strings and cables should be used on your Hoyt bow.

Warning: Never move, remove, or add additional string weights to your Hoyt bow's string or cables. String weights are specifically engineered for weight and location to ensure correct operation of your bow. Alterations to string and cable speed weights could cause your bow to break or malfunction and cause serious injury or death.

Stratos 36 Tune Chart - Preliminary