


DELUXE MASTER BOLT GRIP SET



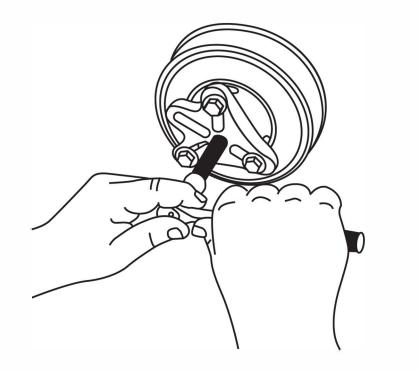

NEED HELP? (800) 340-1442 www.arestool.com customerservice@arestool.com

Don't forget to register your product!

Instructions for Use:

• Line up either two or three bolts with tapped holes in the part being pulled. Make your selection by checking your automobile's manufacturer specification or by hand-turning one of the bolts into the part, checking for proper thread fit.

• Select the proper forcing screw and tip by examining the shaft surface and area for each job.

• Apply pulling force by turning the forcing screw. Keep the forcing screw well lubricated for top performance.

Applications:

• This set is designed for use on harmonic balancers, steering wheels, crankshaft pulleys, and gear pulleys and fits almost all domestic and import automotive and light truck applications.


• The set may be used on tapped hole flywheels on two-cycle engines and electric motors.

• Use the special bolts and cylindrical forcing screw tip designed for crankshafts on 1990 and newer GM 3300-3800 V-6 engines. This will save time while protecting the crankshaft pulley shaft.

Warning: Parts under stress can break. Broken parts can cause eye injury. Wear Safety Goggles that comply with ANSI Standards.

STORE THIS MANUAL IN A SAFE PLACE FOR FUTURE REFERENCE

DELUXE MASTER BOLT GRIP SET

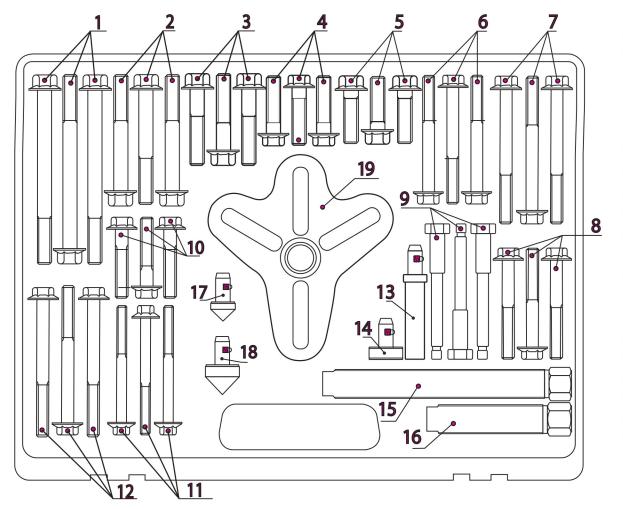

Number	
--------	--

	-
1	3
2	3
1 2 3	3 3
4	
5	3 3
6	3
7	3
8	3 3 3
9	3
10	3
11	3
12	3
13	1
14	
15	1
16	1
17	1
18	1
19	1

Quantity

Washer Head Bolts (Grade 8) 3/8-16UNC x 4.5"2
Washer Head Bolts (Grade 8) 3/8-16UNC x 3"
Washer Head Bolts (Grade 8) 3/8-16UNC x 2"
Washer Head Bolts (Grade 8) 3/8-24UNF x 1.5"
Washer Head Bolts (Grade 8) M10 x 1.5 x 35mm7
Washer Head Bolts (Grade 8) 5/16-24UNF x 3"
Washer Head Bolts (Grade 8) 5/16-18UNC x 3.5"
Washer Head Bolts (Grade 8) M8 x 1.25 x 65mm
Washer Head Bolts (Grade 8) 1/4-28 UNF x 3"
Washer Head Bolts (Grade 8) M8 x 1.25 x 45mm
Special Stepped Bolts (Grade 8) - 1990& Newer
GM 3300-3800 V-6 Crankshaft Pulleys
Washer Head Bolts (Grade 8) M8 x 1.25 x 90mm
Live Center Adapter
Flat-Shank Adapter
Forcing Screw, 3/4-16UNF x 5-3/8"
Forcing Screw, 3/4-16UNF x 2-3/4"19
Flat Adapter
Live Center Adapter
1 Heavy Duty 4 Way Slotted Puller Yoke,
3/4" Center x 4-1/4" diameter