

# CALI<sup>®</sup> vinyl mute step




Coastal Eucalyptus

## Quieter, cushioned comfort.

Cali Vinyl<sup>®</sup> Pro with Mute Step<sup>®</sup> delivers authentic hardwood beauty with attached acoustic padding lining each plank. This IXPE cushion improves sound insulation and provides for quieter steps and more comfortable rooms. Twelve coastal-inspired colors showcase intricate wood imagery and specialized embossing that matches up with the knots and grains you see. Planks are 100% waterproof and geared for commercial grade durability with a GeoCore<sup>®</sup> limestone composite foundation. A UV ceramic enhanced coating shields a 20mil wear layer, for scratch protection from all the pets, kids, and party-people in your life.

## Available Colors

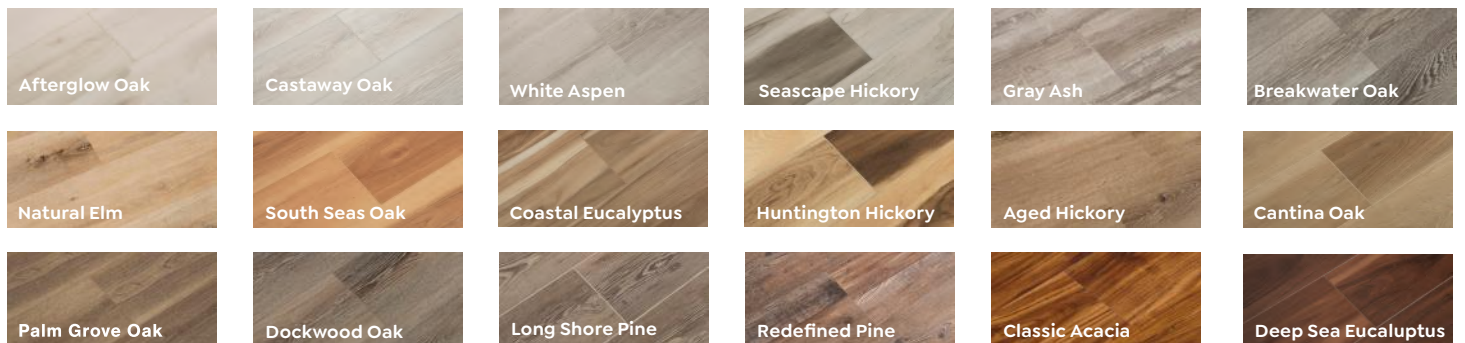



Cantina Oak

## A World of Good at Your Feet

FloorScore® certified and backed by a 50-year residential warranty, Cali Vinyl is made without toxic chemicals, making it safe for homes, hospitals, children, and pets.


## Made for the Soak Zone

100% waterproof planks are exactly that, meaning Cali Vinyl can be installed in every room including kitchens, bathrooms, and basements. This also makes for easy cleaning!

## GeoCore: Bad to the Bone

This backbone of limestone composite resists indentation and delivers 50% better dimensional stability (less expansion and contraction), requiring no acclimation or transition pieces.

## Accessories

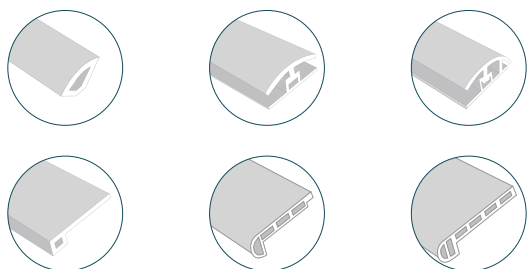

<b>Construction</b>	100% Waterproof GeoCore® (SPC Composite) with attached IXPE Underlayment
<b>Milling</b>	Click-Lock
<b>Grain</b>	Realistic wood grain
<b>Plank Length</b>	48"
<b>Plank Width</b>	7-1/4"
<b>Plank Thickness</b>	6.5mm
<b>Attached Pad</b>	1.5mm IXPE
<b>Wear Layer</b>	20 mil. / 0.5mm
<b>Sqft./Box</b>	24.03 sqft.
<b>Install Type</b>	Float, Glue
<b>Residential Warranty</b>	50 Year
<b>Commercial Warranty</b>	15 Year
<b>LEED Points</b>	EQC4.3
<b>Indoor Air Quality</b>	Low Emitting VOC & Prop 65 Compliant (VOC and Phthalate Test Results Available Upon Request)
<b>Certification</b>	FloorScore® Certified
<b>Sound Ratings</b>	With Cali Complete: STC 61 & IIC 63 Without Underlayment: STC 61 & IIC 64
<b>Application</b>	Residential, Commercial
<b>Radiant Heat Compatible</b>	Yes (up to 85°F)
<b>Static Coefficient of Friction (ASTM C1028)</b>	Tests Pending
<b>Cleanability/Stain Resistance</b>	Tests Pending
<b>Light Resistance</b>	Tests Pending
<b>Fire Rating</b>	Tests Pending