

SPANCO GANTRY CRANES

A-Series Steel, Adjustable Height





A CAPACITY	B1 OVERALL SPAN	B2 MAX. SPAN BETWEEN WHEEL CENTERS	C CLEAR SPAN	D1 HEIGHT UNDER BEAM		D2 OVERALL HEIGHT		E1 BEAM SIZE	E2 FLANGE WIDTH	F TREAD	G CASTER DIA.	NET WT. (LBS.)	MODEL
				Min.	Max.	Min.	Max.						
1 TON	8'	7' 3"	6' 11"	7' 2"	10' 2"	7' 8"	10' 8"	S6"X12.5#	3-3/8"	5' 5"	6"	404	1A0810
		7' 3"	6' 11"	9' 8"	12' 8"	10' 2"	13' 2"	S6"X12.5#	3-3/8"	5' 5"	6"	428	1A0812
		7' 3"	6' 10"	12' 0"	15' 6"	12' 6"	16' 0"	S6"X12.5#	3-3/8"	6' 6"	8"	694	1A0815
	10'	9' 3"	8' 11"	7' 2"	10' 2"	7' 8"	10' 8"	S6"X12.5#	3-3/8"	5' 5"	6"	429	1A1010
		9' 3"	8' 11"	9' 8"	12' 8"	10' 2"	13' 2"	S6"X12.5#	3-3/8"	5' 5"	6"	453	1A1012
		9' 3"	8' 10"	12' 0"	15' 6"	12' 6"	16' 0"	S6"X12.5#	3-3/8"	6' 6"	8"	719	1A1015
	12'	11' 3"	10' 11"	7' 2"	10' 2"	7' 8"	10' 8"	S6"X12.5#	3-3/8"	5' 5"	6"	454	1A1210
		11' 3"	10' 11"	9' 8"	12' 8"	10' 2"	13' 2"	S6"X12.5#	3-3/8"	5' 5"	6"	478	1A1212
		11' 3"	10' 10"	12' 0"	15' 6"	12' 6"	16' 0"	S6"X12.5#	3-3/8"	6' 6"	8"	744	1A1215
	15'	14' 3"	13' 11"	7' 2"	10' 2"	7' 10"	10' 10"	S8"X18.4#	4"	5' 5"	6"	533	1A1510
		14' 3"	13' 11"	9' 8"	12' 8"	10' 4"	13' 4"	S8"X18.4#	4"	5' 5"	6"	557	1A1512
		14' 3"	13' 10"	12' 0"	15' 6"	12' 8"	16' 2"	S8"X18.4#	4"	6' 6"	8"	823	1A1515
	20'	19' 3"	18' 11"	7' 2"	10' 2"	8' 1"	11' 1"	W10"X30#	5-3/4"	5' 5"	6"	904	1A2010-W
		19' 3"	18' 11"	9' 8"	12' 8"	10' 7"	13' 7"	W10"X30#	5-3/4"	5' 5"	6"	928	1A2012-W
		19' 3"	18' 10"	12' 0"	15' 6"	12' 11"	16' 5"	W10"X30#	5-3/4"	6' 6"	8"	1,194	1A2015-W
	25'	24' 3"	23' 11"	7' 2"	10' 2"	8' 1"	11' 1"	W10"X30#	5-3/4"	5' 5"	6"	1,054	1A2510-W
		24' 3"	23' 11"	9' 8"	12' 8"	10' 7"	13' 7"	W10"X30#	5-3/4"	5' 5"	6"	1,204	1A2512-W
		24' 3"	23' 10"	12' 0"	15' 6"	12' 11"	16' 5"	W10"X30#	5-3/4"	6' 6"	8"	1,344	1A2515-W
30'	29' 1"	28' 10"	9' 0"	12' 6"	9' 11"	13' 5"	W10"X30#	5-3/4"	6' 6"	8"	1,435	1A3012-W	
	29' 1"	28' 10"	12' 0"	15' 6"	12' 11"	16' 5"	W10"X30#	5-3/4"	6' 6"	8"	1,495	1A3015-W	
	34' 1"	33' 8"	9' 0"	12' 6"	10' 5"	13' 11"	W16"X50#	7-1/8"	6' 6"	8"	2,285	1A3512-W	
35'	34' 1"	33' 8"	12' 0"	15' 6"	13' 5"	16' 11"	W16"X50#	7-1/8"	6' 6"	8"	2,344	1A3515-W	
	39' 1"	38' 8"	9' 0"	12' 6"	10' 5"	14' 0"	W16"X50#	7-1/8"	6' 6"	8"	2,535	1A4012-W	
	39' 1"	38' 8"	12' 0"	15' 6"	13' 5"	17' 0"	W16"X50#	7-1/8"	6' 6"	8"	2,594	1A4015-W	
2 TON	10'	9' 3"	8' 10"	9' 0"	12' 6"	9' 8"	13' 2"	S8"X18.4#	4"	6' 6"	8"	719	2A1012
		9' 3"	8' 10"	12' 0"	15' 6"	12' 8"	16' 2"	S8"X18.4#	4"	6' 6"	8"	778	2A1015
	15'	14' 3"	13' 10"	9' 0"	12' 6"	9' 10"	13' 4"	S10"X25.4#	4-5/8"	6' 6"	8"	916	2A1512
		14' 3"	13' 10"	12' 0"	15' 6"	12' 10"	16' 4"	S10"X25.4#	4-5/8"	6' 6"	8"	975	2A1515
	20'	19' 3"	18' 10"	9' 0"	12' 6"	10' 1"	13' 7"	W12"X35#	6-1/2"	6' 6"	8"	1,235	2A2012-W
		19' 3"	18' 10"	12' 0"	15' 6"	13' 1"	16' 7"	W12"X35#	6-1/2"	6' 6"	8"	1,294	2A2015-W
	25'	24' 3"	23' 10"	9' 0"	12' 6"	10' 1"	13' 7"	W12"X35#	6-1/2"	6' 6"	8"	1,410	2A2512-W
		24' 3"	23' 10"	12' 0"	15' 6"	13' 1"	16' 7"	W12"X35#	6-1/2"	6' 6"	8"	1,469	2A2515-W
	30'	29' 1"	28' 8"	9' 0"	12' 6"	10' 5"	13' 11"	W16"X50#	7-1/8"	6' 6"	8"	2,035	2A3012-W
		29' 1"	28' 8"	12' 0"	15' 6"	13' 5"	16' 11"	W16"X50#	7-1/8"	6' 6"	8"	2,095	2A3015-W
	35'	34' 1"	33' 7"	9' 0"	12' 6"	10' 7"	14' 1"	W18"X55#	7-1/2"	6' 6"	8"	2,460	2A3512-W
		34' 1"	33' 7"	12' 0"	15' 6"	13' 7"	17' 1"	W18"X55#	7-1/2"	6' 6"	8"	2,519	2A3515-W
40'	39' 1"	38' 7"	9' 0"	12' 6"	10' 5"	13' 11"	W16"X50#*	7-1/8"	6' 6"	8"	3,470	2A4012-W	
	39' 1"	38' 7"	12' 0"	15' 6"	13' 5"	16' 11"	W16"X50#*	7-1/8"	6' 6"	8"	3,529	2A4015-W	
3 TON	10'	9' 1"	8' 6"	9' 4"	12' 10"	10' 2"	13' 8"	S10"X25.4#	4-5/8"	6' 6"	8"	793	3A1012
		9' 1"	8' 6"	12' 4"	15' 10"	13' 2"	16' 8"	S10"X25.4#	4-5/8"	6' 6"	8"	857	3A1015
	15'	14' 1"	13' 6"	9' 4"	12' 10"	10' 2"	13' 8"	S10"X25.4#	4-5/8"	6' 6"	8"	990	3A1512
		14' 1"	13' 6"	12' 4"	15' 10"	13' 2"	16' 8"	S10"X25.4#	4-5/8"	6' 6"	8"	1,054	3A1515
	20'	19' 1"	18' 6"	9' 4"	12' 10"	10' 9"	14' 3"	W16"X50#	7-1/8"	6' 6"	8"	1,611	3A2012-W
		19' 1"	18' 6"	12' 4"	15' 10"	13' 9"	17' 3"	W16"X50#	7-1/8"	6' 6"	8"	1,673	3A2015-W
	25'	24' 1"	23' 6"	9' 4"	12' 10"	10' 11"	14' 5"	W16"X50#	7-1/8"	6' 6"	8"	1,861	3A2512-W
		24' 1"	23' 6"	12' 4"	15' 10"	13' 11"	17' 5"	W16"X50#	7-1/8"	6' 6"	8"	1,949	3A2515-W
	30'	29' 1"	28' 6"	9' 4"	12' 10"	10' 11"	14' 5"	W18"X55#	7-1/2"	6' 6"	8"	2,261	3A3012-W
		29' 1"	28' 6"	12' 4"	15' 10"	13' 11"	17' 5"	W18"X55#	7-1/2"	6' 6"	8"	2,349	3A3015-W
	35'	34' 1"	33' 6"	9' 4"	12' 10"	11' 2"	14' 8"	W21"X68#	8-1/4"	6' 6"	8"	2,991	3A3512-W
		34' 1"	33' 6"	12' 4"	15' 10"	14' 2"	17' 8"	W21"X68#	8-1/4"	6' 6"	8"	3,079	3A3515-W
40'	39' 1"	38' 6"	9' 4"	12' 10"	11' 5"	14' 11"	W24"X84#	9"	6' 6"	8"	3,971	3A4012-W	
	39' 1"	38' 6"	12' 4"	15' 10"	14' 5"	17' 11"	W24"X84#	9"	6' 6"	8"	4,059	3A4015-W	

A CAPACITY	B1 OVERALL SPAN	B2 MAX. SPAN BETWEEN WHEEL CENTERS	C CLEAR SPAN	D1 HEIGHT UNDER BEAM		D2 OVERALL HEIGHT		E1 BEAM SIZE	E2 FLANGE WIDTH	F TREAD	G CASTER DIA.	NET WT. (LBS.)	MODEL
				Min.	Max.	Min.	Max.						
5 TON	10'	9' 1"	8' 6"	9' 4"	12' 10"	10' 2"	13' 8"	S10"X25.4#	4-5/8"	6' 6"	8"	1,040	5A1012
		9' 1"	8' 6"	12' 4"	15' 10"	13' 2"	16' 8"	S10"X25.4#	4-5/8"	6' 6"	8"	1,124	5A1015
	15'	14' 1"	13' 6"	9' 4"	12' 10"	10' 7"	14' 1"	S15"X42.9#	5-1/2"	6' 6"	8"	1,430	5A1512
		14' 1"	13' 6"	12' 4"	15' 10"	13' 7"	17' 1"	S15"X42.9#	5-1/2"	6' 6"	8"	1,514	5A1515
	20'	19' 1"	18' 6"	9' 4"	12' 10"	11' 5"	14' 11"	W24"X84#	9"	6' 6"	8"	2,466	5A2012-W
		19' 1"	18' 6"	12' 4"	15' 10"	14' 5"	17' 11"	W24"X84#	9"	6' 6"	8"	2,550	5A2015-W
	25'	24' 1"	23' 6"	9' 4"	12' 10"	11' 5"	14' 11"	W24"X84#	9"	6' 6"	8"	2,886	5A2512-W
		24' 1"	23' 6"	12' 4"	15' 10"	14' 5"	17' 11"	W24"X84#	9"	6' 6"	8"	2,970	5A2515-W
	30'	29' 1"	28' 6"	9' 4"	12' 10"	11' 5"	14' 11"	W24"X84#	9"	6' 6"	8"	3,306	5A3012-W
		29' 1"	28' 6"	12' 4"	15' 10"	14' 5"	17' 11"	W24"X84#	9"	6' 6"	8"	3,390	5A3015-W
	35'	34' 1"	33' 6"	9' 4"	12' 10"	11' 5"	14' 11"	W24"X103#	9"	6' 6"	8"	4,085	5A3512-W
		34' 1"	33' 6"	12' 4"	15' 10"	14' 5"	17' 11"	W24"X103#	9"	6' 6"	8"	4,787	5A3515-W
	40'	39' 1"	38' 6"	9' 4"	12' 10"	11' 5"	14' 11"	W24"X103#	9"	6' 6"	8"	5,200	5A4012-W
		39' 1"	38' 6"	12' 4"	15' 10"	14' 5"	17' 11"	W24"X103#	9"	6' 6"	8"	5,302	5A4015-W

A CAPACITY	B1 OVERALL SPAN	B2 MAX. SPAN BETWEEN WHEEL CENTERS	C CLEAR SPAN	D1 HEIGHT UNDER BEAM		D2 OVERALL HEIGHT		E1 BEAM SIZE	E2 FLANGE WIDTH	F TREAD	G CASTER DIA.	NET WT. (LBS.)	MODEL
				Min.	Max.	Min.	Max.						
7½ TON	10'	9' 1"	8' 6"	9' 0"	13' 0"	10' 0"	14' 0"	S12"X31.8#	5"	6' 6"	12"	1,398	7A1013
		9' 1"	8' 6"	12' 0"	16' 0"	13' 0"	17' 0"	S12"X31.8#	5"	6' 6"	12"	1,500	7A1016
	15'	14' 1"	13' 6"	9' 0"	13' 0"	10' 6"	14' 6"	S18"X54.7#	6"	6' 6"	12"	1,900	7A1513
		14' 1"	13' 6"	12' 0"	16' 0"	13' 6"	17' 6"	S18"X54.7#	6"	6' 6"	12"	2,002	7A1516
	20'	19' 1"	18' 6"	9' 0"	13' 0"	10' 7"	14' 7"	S18"X54.7#*	6"	6' 6"	12"	2,373	7A2013
		19' 1"	18' 6"	12' 0"	16' 0"	13' 7"	17' 7"	S18"X54.7#*	6"	6' 6"	12"	2,475	7A2016
	25'	24' 1"	23' 6"	9' 0"	13' 0"	10' 7"	14' 7"	S18"X54.7#*	6"	6' 6"	12"	2,480	7A2513
		24' 1"	23' 6"	12' 0"	16' 0"	13' 7"	17' 7"	S18"X54.7#*	6"	6' 6"	12"	2,582	7A2516
	30'	29' 1"	28' 6"	9' 0"	13' 0"	11' 1"	15' 1"	S24"X80#	7"	6' 6"	12"	3,519	7A3013
		29' 1"	28' 6"	12' 0"	16' 0"	14' 1"	18' 1"	S24"X80#	7"	6' 6"	12"	3,621	7A3016
	35'	34' 1"	33' 6"	9' 0"	13' 0"	11' 1"	15' 1"	S24"X80#*	7"	6' 6"	12"	4,415	7A3513
		34' 1"	33' 6"	12' 0"	16' 0"	14' 1"	18' 1"	S24"X80#*	7"	6' 6"	12"	4,517	7A3516
	40'	39' 1"	38' 6"	9' 0"	13' 0"	11' 1"	15' 1"	S24"X80#*	7"	6' 6"	12"	4,892	7A4013
		39' 1"	38' 6"	12' 0"	16' 0"	14' 1"	18' 1"	S24"X80#*	7"	6' 6"	12"	4,994	7A4016

A CAPACITY	B1 OVERALL SPAN	B2 MAX. SPAN BETWEEN WHEEL CENTERS	C CLEAR SPAN	D1 HEIGHT UNDER BEAM		D2 OVERALL HEIGHT		E1 BEAM SIZE	E2 FLANGE WIDTH	F TREAD	G CASTER DIA.	NET WT. (LBS.)	MODEL
				Min.	Max.	Min.	Max.						
10 TON	10'	9' 1"	8' 6"	8' 11"	12' 11"	10' 5"	14' 5"	S18"X54.7#	6"	6' 6"	12"	1,921	10A1013
		9' 1"	8' 6"	11' 11"	15' 11"	13' 5"	17' 5"	S18"X54.7#	6"	6' 6"	12"	2,057	10A1016
	15'	14' 1"	13' 6"	8' 11"	12' 11"	10' 5"	14' 5"	S18"X54.7#	6"	6' 6"	12"	2,194	10A1513
		14' 1"	13' 6"	11' 11"	15' 11"	13' 5"	17' 5"	S18"X54.7#	6"	6' 6"	12"	2,330	10A1516
	20'	19' 1"	18' 6"	8' 11"	12' 11"	10' 11"	14' 11"	S24"X80#	7"	6' 6"	12"	2,964	10A2013
		19' 1"	18' 6"	11' 11"	15' 11"	13' 11"	17' 11"	S24"X80#	7"	6' 6"	12"	3,110	10A2016
	25'	24' 1"	23' 6"	8' 11"	12' 11"	11' 0"	15' 0"	S24"X80#*	7"	6' 6"	12"	3,634	10A2513
		24' 1"	23' 6"	11' 11"	15' 11"	14' 0"	18' 0"	S24"X80#*	7"	6' 6"	12"	3,770	10A2516
	30'	29' 1"	28' 6"	8' 11"	12' 11"	11' 0"	15' 0"	S24"X80#*	7"	6' 6"	12"	4,395	10A3013
		29' 1"	28' 6"	11' 11"	15' 11"	14' 0"	18' 0"	S24"X80#*	7"	6' 6"	12"	4,531	10A3016
	35'	34' 1"	33' 6"	8' 11"	12' 11"	11' 0"	15' 0"	S24"X80#*	7"	6' 6"	12"	4,899	10A3513
		34' 1"	33' 6"	11' 11"	15' 11"	14' 0"	18' 0"	S24"X80#*	7"	6' 6"	12"	5,035	10A3516
	40'	39' 1"	38' 6"	8' 11"	12' 11"	11' 0"	15' 0"	S24"X80#*	7"	6' 6"	12"	5,402	10A4013
		39' 1"	38' 6"	11' 11"	15' 11"	14' 0"	18' 0"	S24"X80#*	7"	6' 6"	12"	5,538	10A4016

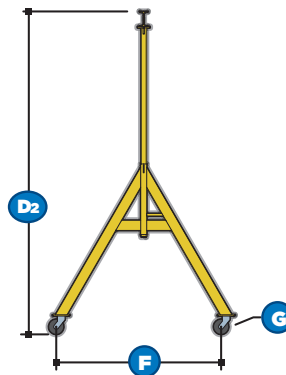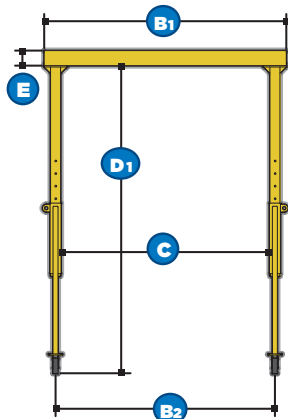

SPANCO GANTRY CRANES

A-Series Steel, Fixed-Height



A CAPACITY	B1 OVERALL SPAN	B2 MAX. SPAN BETWEEN WHEEL CENTERS	C CLEAR SPAN	D1 HEIGHT UNDER BEAM	D2 OVERALL HEIGHT	E1 BEAM SIZE	E2 FLANGE WIDTH	F TREAD	G CASTER DIA.	NET WT. (LBS.)	MODEL
1 TON	8'	7' 3"	6' 11"	10' 0"	10' 6"	S6"X12.5#	3-3/8"	5' 5"	6"	320	1F0810
	10'	9' 3"	8' 11"	10' 0"	10' 6"	S6"X12.5#	3-3/8"	5' 5"	6"	345	1F1010
	12'	11' 3"	10' 11"	10' 0"	10' 6"	S6"X12.5#	3-3/8"	5' 5"	6"	370	1F1210
	15'	14' 3"	13' 11"	10' 0"	10' 8"	S8"X18.4#	4"	5' 5"	6"	450	1F1510
	20'	19' 3"	18' 11"	10' 0"	10' 11"	W10"X30#	5-3/4"	5' 5"	6"	820	1F2010-W
	25'	24' 3"	23' 11"	10' 0"	10' 11"	W10"X30#	5-3/4"	5' 5"	6"	970	1F2510-W
	30'	29' 3"	28' 10"	10' 0"	10' 11"	W10"X30#	5-3/4"	6' 6"	8"	1,120	1F3010-W
	35'	34' 1"	33' 8"	10' 0"	11' 5"	W16"X50#	7-1/8"	6' 6"	8"	1,970	1F3510-W
40'	39' 1"	38' 8"	10' 0"	11' 5"	W16"X50#	7-1/8"	6' 6"	8"	2,220	1F4010-W	

A CAPACITY	B1 OVERALL SPAN	B2 MAX. SPAN BETWEEN WHEEL CENTERS	C CLEAR SPAN	D1 HEIGHT UNDER BEAM	D2 OVERALL HEIGHT	E1 BEAM SIZE	E2 FLANGE WIDTH	F TREAD	G CASTER DIA.	NET WT. (LBS.)	MODEL
2 TON	10'	9' 3"	8' 10"	10' 0"	10' 8"	S8"X18.4#	4"	6' 6"	8"	612	2F1010
	15'	14' 3"	13' 10"	10' 0"	10' 10"	S10"X25.4#	4-5/8"	6' 6"	8"	809	2F1510
	20'	19' 3"	18' 10"	10' 0"	11' 1"	W12"X35#	6-1/2"	6' 6"	8"	1,128	2F2010-W
	25'	24' 3"	23' 10"	10' 0"	11' 1"	W12"X35#	6-1/2"	6' 6"	8"	1,303	2F2510-W
	30'	29' 1"	28' 8"	10' 0"	11' 5"	W16"X50#	7-1/8"	6' 6"	8"	1,928	2F3010-W
	35'	34' 1"	33' 8"	10' 0"	11' 7"	W18"X55#	7-1/2"	6' 6"	8"	2,353	2F3510-W
40'	39' 1"	38' 8"	10' 0"	11' 5"	W16"X50#*	7-1/8"	6' 6"	8"	2,829	2F4010-W	

A CAPACITY	B1 OVERALL SPAN	B2 MAX. SPAN BETWEEN WHEEL CENTERS	C CLEAR SPAN	D1 HEIGHT UNDER BEAM	D2 OVERALL HEIGHT	E1 BEAM SIZE	E2 FLANGE WIDTH	F TREAD	G CASTER DIA.	NET WT. (LBS.)	MODEL
3 TON	10'	9' 3"	8' 7"	12' 10"	13' 8"	S10"X25.4#	4-5/8"	6' 6"	8"	739	3F1012
	15'	14' 3"	13' 7"	12' 10"	13' 8"	S10"X25.4#	4-5/8"	6' 6"	8"	936	3F1512
	20'	19' 3"	18' 7"	12' 10"	14' 3"	W16"X50#	7-1/8"	6' 6"	8"	1,555	3F2012-W
	25'	24' 1"	23' 7"	12' 10"	14' 3"	W16"X50#	7-1/8"	6' 6"	8"	1,805	3F2512-W
	30'	29' 1"	28' 7"	12' 10"	14' 5"	W18"X55#	7-1/2"	6' 6"	8"	2,205	3F3012-W
	35'	34' 1"	33' 7"	12' 10"	14' 8"	W21"X68#	8-1/4"	6' 6"	8"	2,935	3F3512-W
40'	39' 1"	38' 7"	12' 10"	14' 11"	W24"X84#	9"	6' 6"	8"	3,915	3F4012-W	

A CAPACITY	B1 OVERALL SPAN	B2 MAX. SPAN BETWEEN WHEEL CENTERS	C CLEAR SPAN	D1 HEIGHT UNDER BEAM	D2 OVERALL HEIGHT	E1 BEAM SIZE	E2 FLANGE WIDTH	F TREAD	G CASTER DIA.	NET WT. (LBS.)	MODEL
5 TON	10'	9' 1"	8' 7"	15' 10"	16' 8"	S10"X25.4#	4-5/8"	6' 6"	8"	1,060	5F1015
	15'	14' 1"	13' 7"	15' 10"	17' 1"	S15"X42.9#	5-1/2"	6' 6"	8"	1,450	5F1515
	20'	19' 1"	18' 7"	15' 10"	17' 11"	W24"X84#	9"	6' 6"	8"	2,486	5F2015-W
	25'	24' 1"	23' 7"	15' 10"	17' 11"	W24"X84#	9"	6' 6"	8"	2,906	5F2515-W
	30'	29' 1"	28' 7"	15' 10"	17' 11"	W24"X84#	9"	6' 6"	8"	3,326	5F3015-W
	35'	34' 1"	33' 7"	15' 10"	17' 11"	W24"X103#	9"	6' 6"	8"	4,411	5F3515-W
40'	39' 1"	38' 7"	15' 10"	17' 11"	W24"X103#	9"	6' 6"	8"	4,926	5F4015-W	