

# Robbie Pendant

TP1171, TP1181 | 1.0

## GENERATION LIGHTING PENDANT

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.


**CAUTION - RISK OF FIRE**  
 This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.  
 Use minimum 90°C supply conductors.

**SAVE THESE INSTRUCTIONS!**

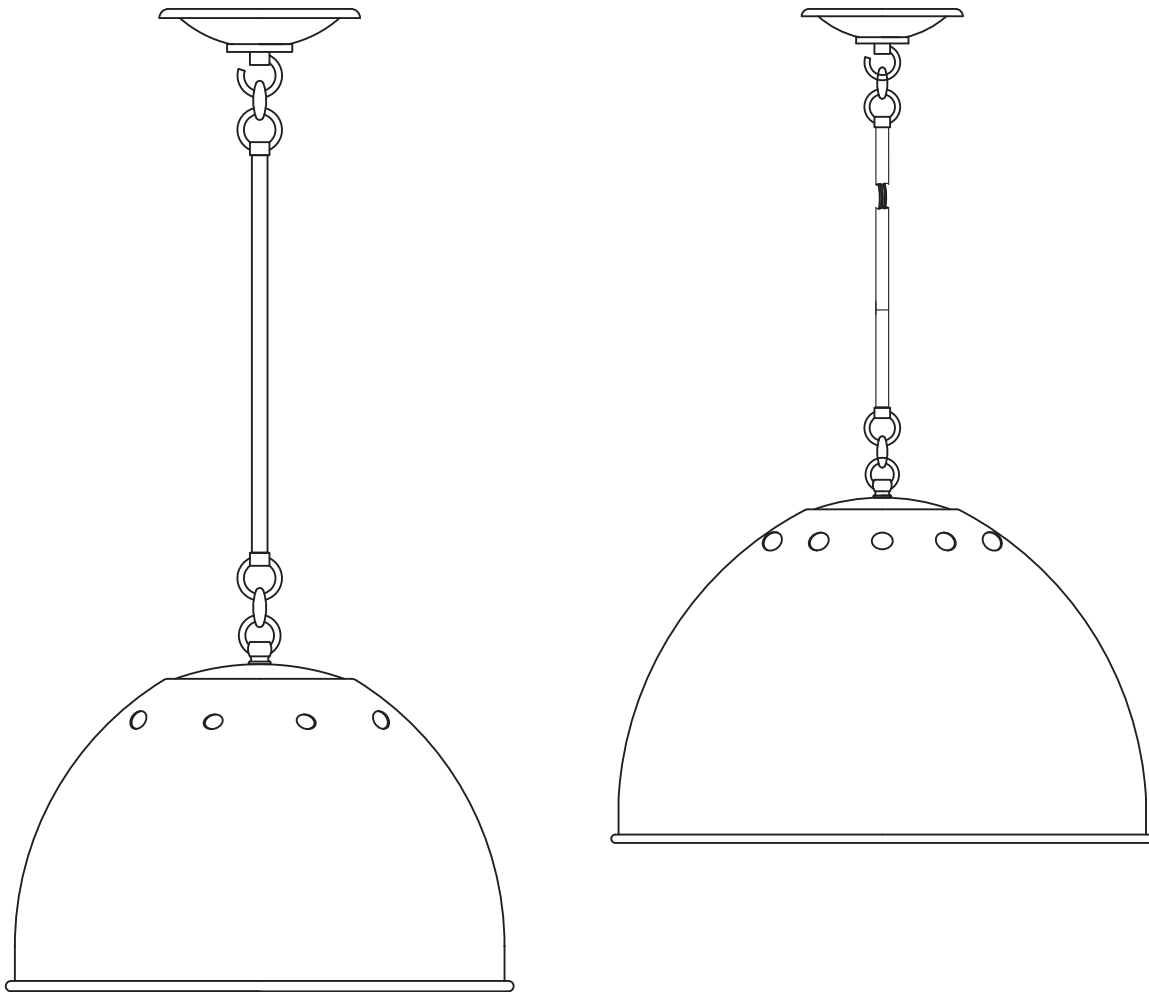

GENERATION LIGHTING  
 7400 Linder Ave., Skokie, IL 60077  
 T 847.410.4400 | F 847.410.4500  
 www.generationlighting.com

# Install the Fixture

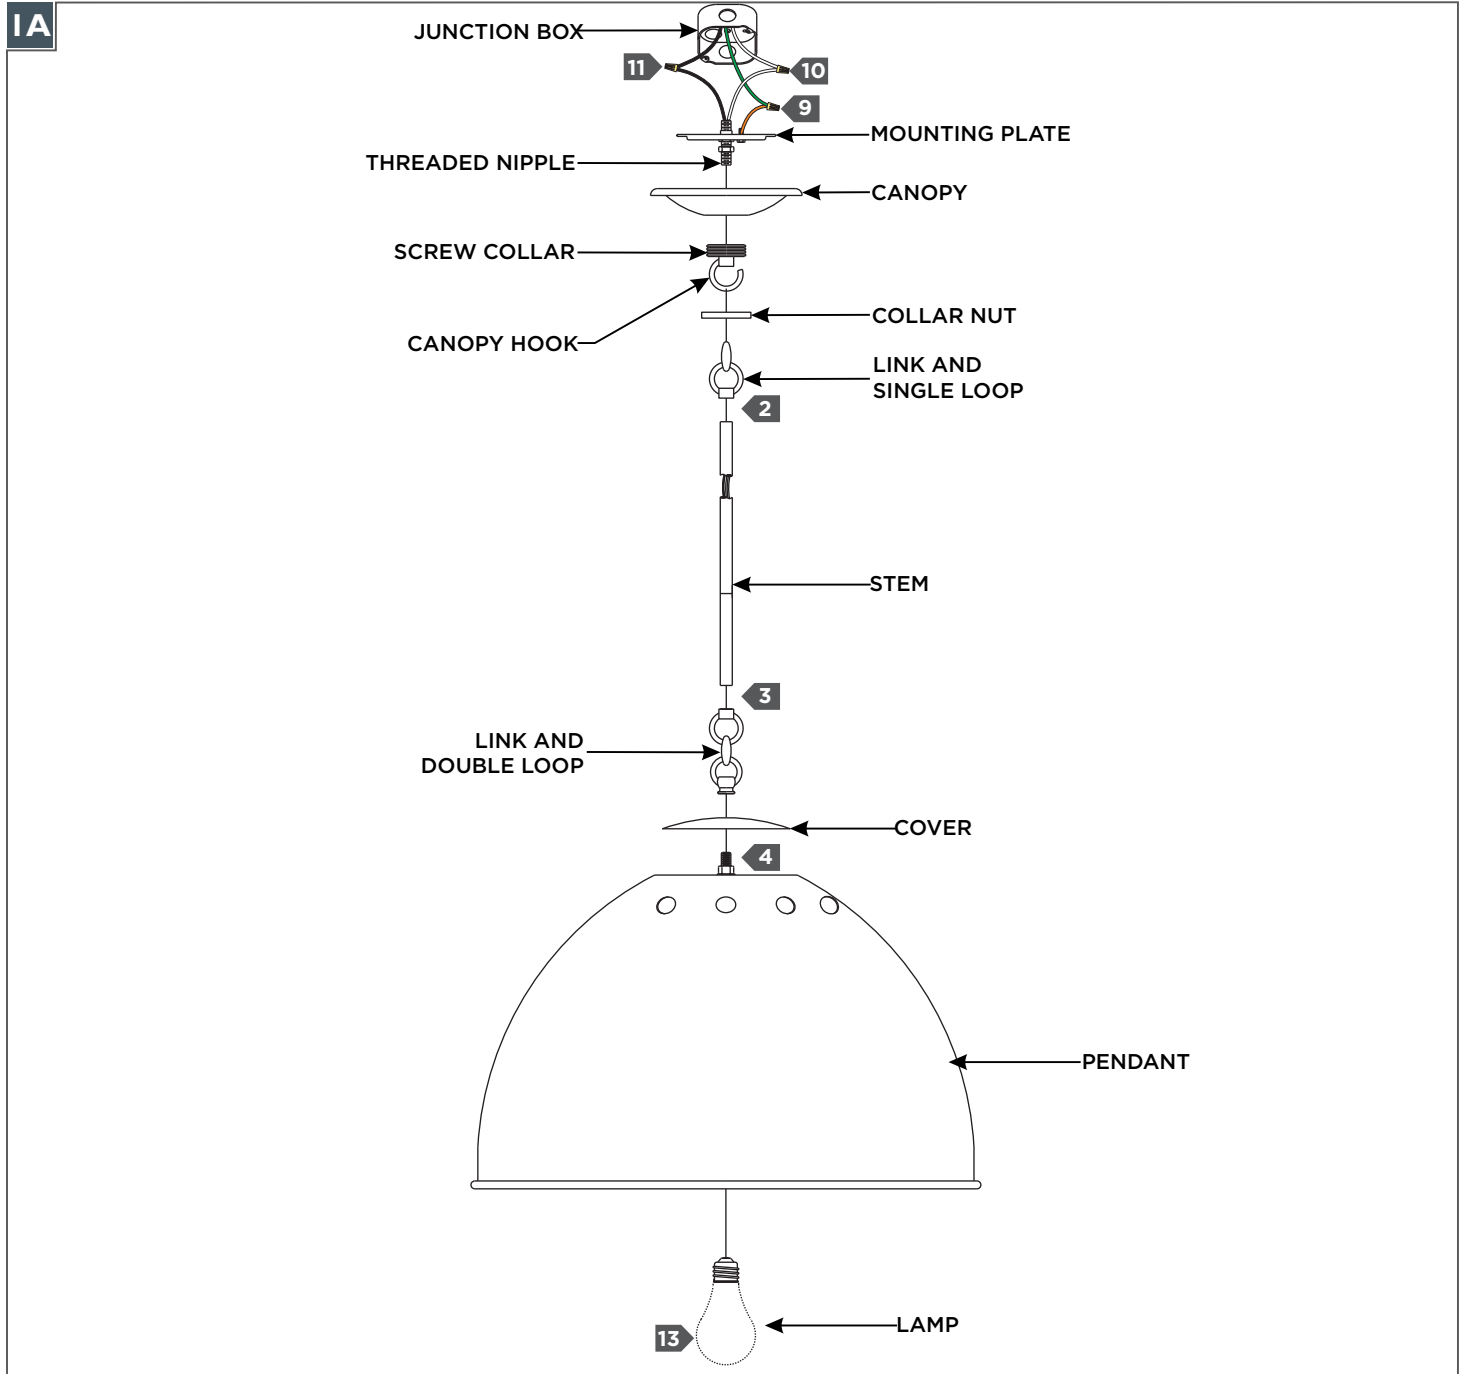

- 1** Determine the wanted height or look of the fixture with the provided stems and assemble them by screwing them together.
- 2** Screw the link and single loop to the top of the stem assembly.
- 3** Screw the link and double loop to the bottom of the stem assembly.
- 4** Feed the fixture wires through the cover, stem/loops and screw the stem assembly to the top of the pendant.
- 5** Unscrew the collar nut off the screw collar and place it onto the stem/loop followed by the canopy.
- 6** Screw the screw collar onto the threaded nipple.
- 7** Feed the fixture wires through the threaded nipple and hook the stem/loop assembly onto the mounting plate assembly.
- 8** Align and secure the mounting plate to the junction box.
- 9** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 10** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 11** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 12** Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place by screwing the collar nut tightly onto the screw collar.
- 13** Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.