


Model Number: 97000945

#### PRODUCT FEATURES

- With no centre pillar you can use trays and containers of varying sizes.
- This Pillarless range is perfect for kitchens looking to maximise their food storage.
- Complete with stainless steel top.
- Programmable electronic controller and display.
- Includes: Shelf x 4, lockable (115mm) Castors (20mm thread) x 4, Spanner and Spacer (for castors).
- Sold Separately: Optional Adjustable legs 150-180mm.



### **TECHNICAL DRAWING**

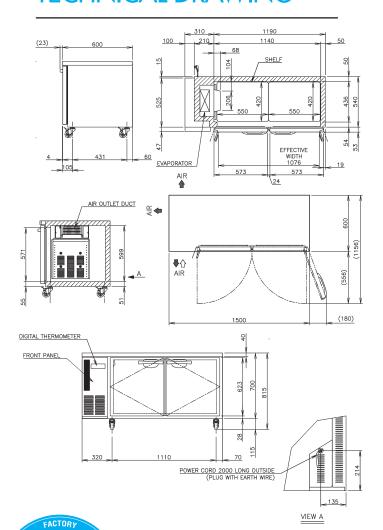

# Additional 12 months extended warranty if registered on-line within 4 weeks of purchase. hoshizaki.com.au

## PRODUCT SPECIFICATION

Interior	Stainless Steel, ABS Plastic (Doors)
Exterior	Stainless Steel, Galvanized Steel (Rear/Bottom)
	ABS plastic (Top & Bottom on Door)
Effective Capacity	318L
Temperature Control	Microprocessor(Digital Temp Indication)
	Adjustable from -23 to -7°C
Evaporator	Fin & Tube type
Outside Dimensions	1500mm (W) x 600mm (D) x 815mm(H)
Inside Dimensions	1140mm (W) x $436$ mm (D) x $599$ mm (H)
Refrigeration System	Forced Air Circulation
Weight Net/Gross(kg)	81/86
AC Supply Voltage	1 PHASE 220-240V 50Hz /10amp Plug
Amperage	Rated: 2.6A
Refrigerant	R404A
Operating Conditions	Ambient Temp.: 5-38°C
	Voltage Range: Rated Voltage ±6%
Electrical consumption	349W, Heater 375W,
	Defrost 330W*, (GEMS) kWh/24h - 8.19
Shelf load	Maximum loading of each shelf is 60 kg

<sup>\*</sup>electric consumption are based on measurements of ambient temperate of 38 and power supply of 230v 50hz

### **INSTALLATION REQUIREMENTS**

- Equipment should not be located in direct sunlight or next to sources of high heat.\*
- Allow at least 50 cm clearance between the front panel air inlet/outlet and the wall or other equipment for proper air circulation.\*

<sup>\*</sup>Refer to manual for full installation & maintenance requirements.







