



MODEL #

PROJECT:

NOTES:

DATE:

PREPARED BY:

HOURGLASS POST TOP LIGHT

PRODUCT FEATURES:

- SMD 2835 LEDs, high luminous efficiency and long working life.
- ✤ High efficiency LED Driver, wide range input voltage AC120-277V;
- ♦ Die-cast alloy design, better cooling, light quality, LED Tj $< 85 \,^\circ C$.
- Optical design, greatly improved the light utilization and evenness
- Excellent Efficiency 140Lm/w

Additional Information:

- o Power: 100W
- o Input: AC 120-277V
- CCT: 5000K
- o Output: 13971 LM
- o Light Source: SMD 2835 LEDs
- o Driver: WELED POWER




100W



PRODUCT APPLICATIONS:

1000LED Post Top Lighting Series can be widely used in Parks, Pathways, Courtyards and more

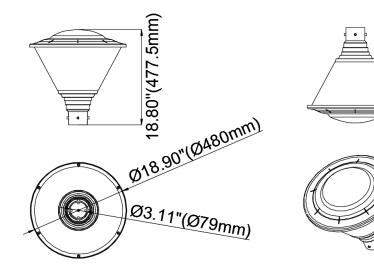

STRUCTURE FEATURES:

- o Shell Materials: Aluminum & PC
- o Finish: Dark Bronze/White/black(Option)
- o Net Weight: 7.7KG (17LBS)
- Product Size: 480mm*477.5mm
- o Carton Size: 505mm*505mm*535mm




100W

HOURGLASS POST TOP LIGHT

TECHNICAL PARAMETERS:

Туре	1L-HPT06W27-XXK-Z-E					
Power	100W	Lighting Angle	162°			
Input Voltage	AC120-277V	LED Brightness Decay <5%/6000 hrs				
PF	>0.98	Working Life	>75000 hrs			
Driver Efficiency	>90%	Working Temperature	-30 - +45℃			
Luminous Flux	13971 Lm	Storage Temperature	-40 -+80°C			
Color Temperature	4000K/5000K	Protection Level	Wet Location			
CRI	Ra>70	Cable 3 CORE/18AWG				

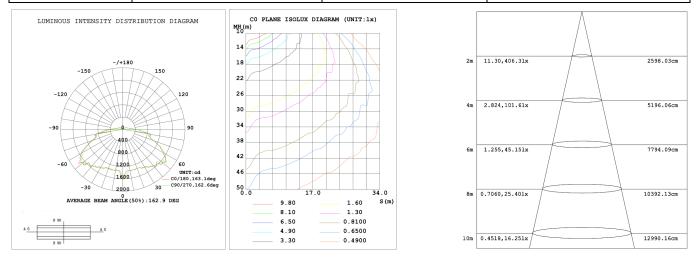

ORDERING EXAMPLE: 1L-HPT10W27-XXK-Z [D, W, B, S] -E [blank,M]

1L	HPT	10W	27	ХХК	Z	E
Company	Product	Power	Voltage	ColorTemp	FINISH	Control
1000LED	HPT Hourglass Post Top Light	06W (60W) 10W (100W)	27 AC120-277V	40K (4000K) 50K (5000K) ± 500K	D (Dark Bronze) W (White) B (Black) S (Silvery)	M Motion Sensor