


IN27 Path Light

Product Features

- Crafted with 316 Stainless Steel for Maximum Durability
- Single LED Chip for Spot-On Lux Control
- Sleek L-Shape Design for a Modern Look
- Patented Glare-Reducing Lens
- Premium Antique Bronze PVD Finish
- Weather-Resistant Design for Harsh Environments



Specifications


Rev. 06/2025

Luminaire Type: Dedicated Low Voltage LED
Color Temperature: 2700K / 3000K
Material: 316 Stainless Steel
Finish: Antique Bronze PVD Finish
Wattage: 0.85 - 3.25W
Field Angle: 154°

Lumen Output: 38 - 140 lm
Operating Voltage: 9V - 15V AC
Light Source: Bridgelux LED
Color Rendering Index: 98+
TM-30 Rf: 95
TM-30 Rg: 101

Wire Lead: 10' 18AWG
Mounting: Eagle Claw Stake (included)
Listing: ETL
Standard: UL 1838
Rating: IP65

Product Drawings

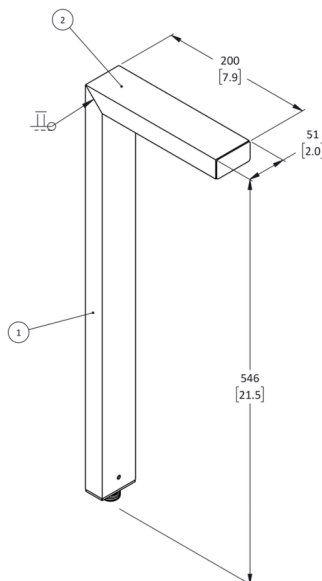

Driver at 15V Input

Settings	Lumens	VA	Lm/W
Maximum	140 lm	4.76 VA	43.40
Medium	75 lm	2.52 VA	46.33
Minimum	38 lm	1.46 VA	44.36

(Potentiometer located on driver)